

EDN[®]




SPECIAL ISSUE — Part 2
Product Showcase No 29

Highlighting key trends in
instruments, computers
& peripherals, CAE,
and components




Expanded literature section

ELECTRONIC TECHNOLOGY FOR ENGINEERS AND ENGINEERING MANAGERS

PRODUCT SHOWCASE

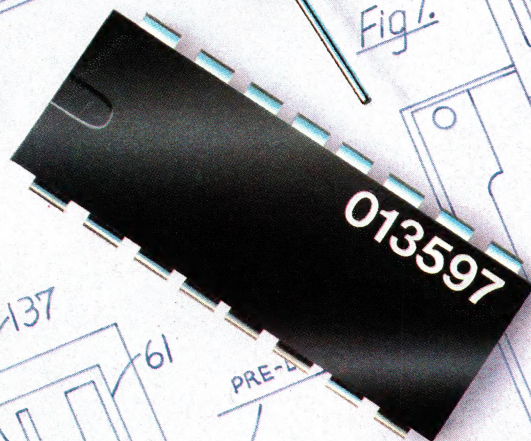

VTX EMULATOR BOARD
17255613348-A

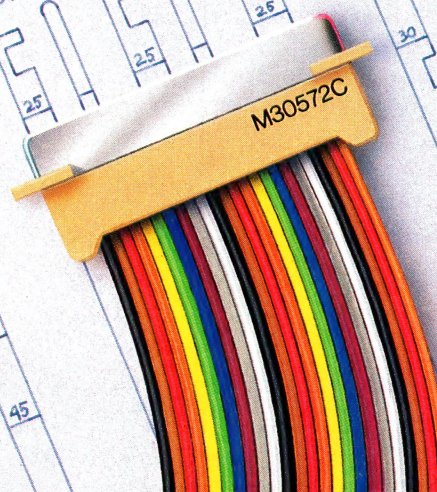

Compressed Data Doubles Throughput



The EXAR 2400 MNP5 Modem Chip Set

For The Next Generation V.22 bis Modem

The cost effectiveness and superior performance of MNP® protocol for V.22bis modems is making it the most demanded feature by all 2400 modem users. The XR 2400 MNP2-5 chip set allows you to out muscle your competition in this fast growing market, right now!

Doubles Data Transfer Speed

EXAR's 2400 MNP5 data compression scheme increases the effective throughput by up to 100% or 4800 BPS, and that's in full duplex mode, cutting transmission costs dramatically. You don't waste time or energy.

100% Error Free Data

Not only is the transmission time cut in half but data is now error free. Your customers get the data fast and correct the first time.

XR2400 MNP2-5 Features

- MNP5 for error free 4800 BPS throughput in full duplex mode
- MNP2-4 for 100% error correction
- CCITT V.22bis compliant
- CCITT V.42 compatible
- Low power CMOS for laptop and portable modems
- Same hardware for MNP/NON-MNP V.22bis designs
- Simple and cost effective implementation ■ ...and more

Call EXAR today at **(408) 434-6400** and discuss your future products with... The XR-2321 (V.23/V.21) for Quad modem applications, V.42/V.42bis enhancement to the XR-2400 chip set, and the XR-2900 FAX/DATA modem.

Put Some Muscle In Your Modem

EXAR the analog plus™ company

MNP is a registered trademark of Microcom, Inc. Analog Plus is a trademark of EXAR Corporation.

EXAR Corporation

2222 Qume Dr., P.O. Box 49007, San Jose, CA 95161-9007

Tel. (408) 434-6400

FAX (408) 943-8245




Ceramic and thick film alone can't make a great network partnership.

Dale® can give you more utility — and value — from thick film resistor networks. We offer the industry's widest choice of through-hole mounted styles — including commercial and MIL-R-83401. And, we're well-qualified to guide you into efficient use of surface mounting with gull wing and



Dale Makes Your Basics Better

Dale® Can.

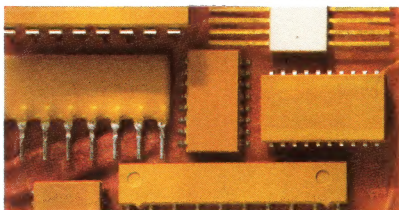

"J"-lead small outline styles proven in high-volume applications.

This wide choice lets us help your project teams much earlier in the planning process... providing faster access to nonstandard

resistor and resistor/capacitor schematics when required.

What's more, our extensive experience with Just-In-Time and Statistical Process Control programs can provide a much higher comfort level with quality and delivery. Call today. Let's discuss a partnership that offers maximum leverage for efficient network use. Contact your Dale Representative or phone (915) 592-3253. Dale Electronics, Inc., Box 26728, El Paso, Texas 79926-6728.




DALE ELECTRONICS, INC.
... a VISHAY Company

CIRCLE NO. 1

OPEN SYSTEMS::OPEN TOOLS™

MAXIMUM POWER FOR REAL-TIME DEVELOPMENT

Whether over the backplane or network, Heurikon has your VME and Multibus targets. VxWorks • VADSWorks • OS-9 • VRTX • Ada • Unix V.3 • Network solutions • Just a few of the Open Tools™ Heurikon has to speed your application to market. Call now for real-time response.

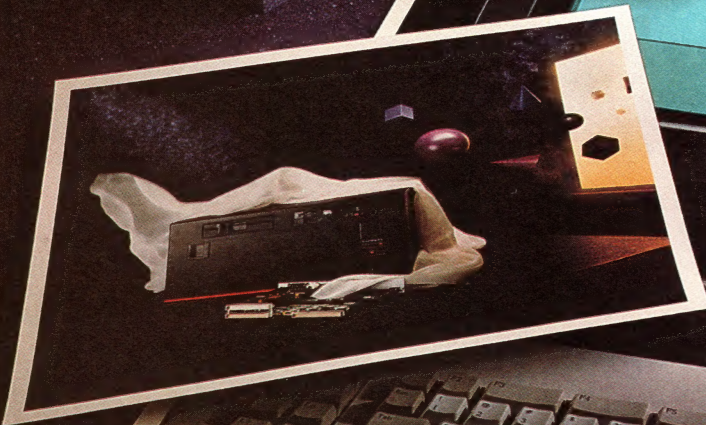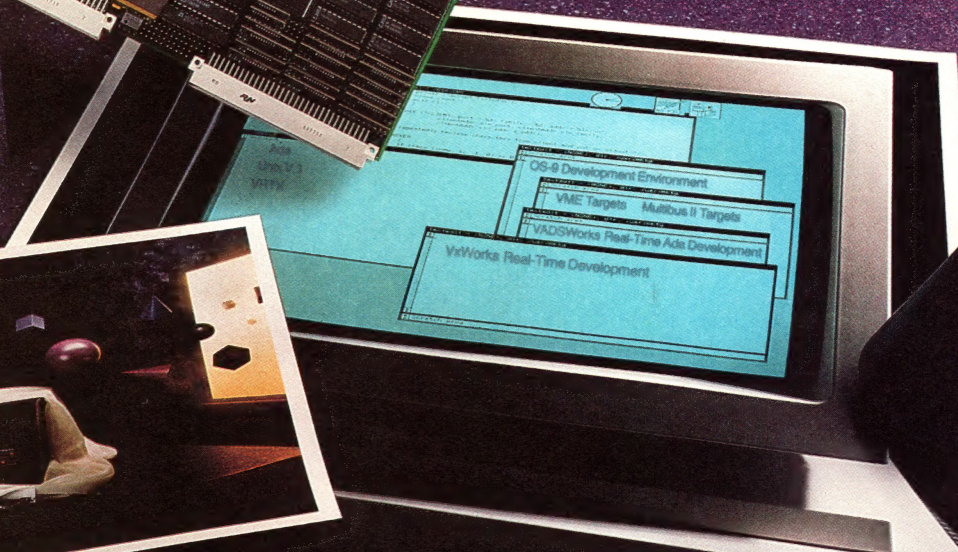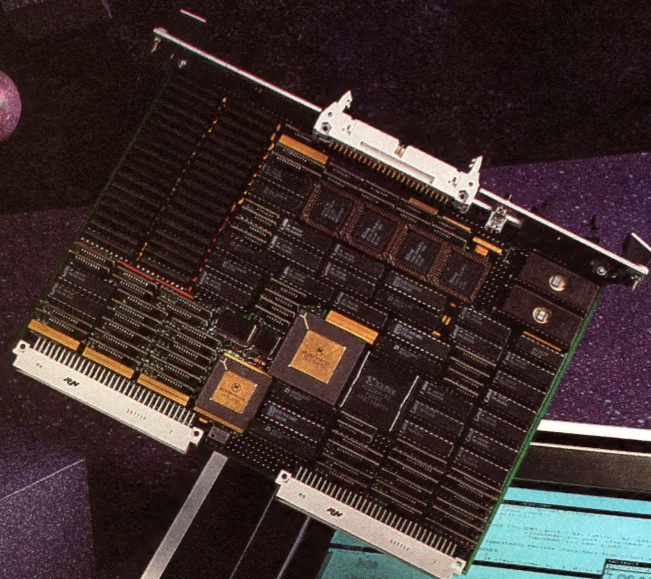

1-800-356-9602

HEURIKON
CORP.
MICROCOMPUTERS FOR INDUSTRY

VxWorks is a trademark of Wind River Systems, Inc. VADSWorks is a trademark of Wind River Systems, Inc. and Verdex Corporation. VRTX is a trademark of Ready Systems, Inc. OS-9 is a trademark of Microware Systems, Inc. Unix is a trademark of AT&T Bell Laboratories, Inc. Multibus is a trademark of Intel Corporation. Open Systems: Open Tools is a trademark of Heurikon Corporation. Open Tools is a trademark of Heurikon Corporation.

CIRCLE NO. 2



value-packed filters from **\$11.45**

dc to 3GHz

- less than 1dB insertion loss over entire passband
- greater than 40dB stopband rejection
- 5 section, 30dB per octave roll-off
- VSWR less than 1.7 (typ)
- over 100 models, immediate delivery
- meets MIL-STD-202
- rugged hermetically sealed package (0.4 x 0.8 x 0.4 in.)
- BNC, Type N, SMA available

finding new ways ...
setting higher standards

Mini-Circuits

A Division of Scientific Components Corporation
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500
Fax (718) 332-4661 Domestic and International Telexes: 6852844 or 620156

LOW PASS	Model	*LP-	10.7	21.4	30	50	70	100	150	200	300	450	550	600	750	850	1000
Min. Pass Band (MHz) DC to			10.7	22	32	48	60	98	140	190	270	400	520	580	700	780	900
Max, 20dB Stop Frequency (MHz)			19	32	47	70	90	147	210	290	410	580	750	840	1000	1100	1340

Prices (ea.): Qty. (1-9) P \$11.45, B \$32.95, N \$35.95, S \$34.95

HIGH PASS	Model	*HP-	50	100	150	200	250	300	400	500	600	700	800	900	1000
Pass Band (MHz)	start, max.		41	90	133	185	225	290	395	500	600	700	780	910	1000
	end, min.		200	400	600	800	1200	1600	1600	1600	1600	1800	2000	2100	2200
Min. 20dB Stop Frequency (MHz)			26	55	95	116	150	190	290	365	460	520	570	660	720

Prices (ea.): Qty. (1-9) P \$14.95, B \$36.95, N \$39.95, S \$38.95

*Prefix P for pins, B for BNC, N for Type N, S for SMA

example: PLP-10.7

C105 REV. E

SPDT & SP4T SWITCHES

WITH BUILT-IN DRIVERS



10 to 3000MHz from \$39⁹⁵

Now, high-speed, high-isolation switches with built-in drivers, tough enough to pass stringent MIL-STD-202 tests. There's no longer any need to hassle with the complexities of designing a TTL driver interface and then adding yet another component to your subsystem...it's already included in a rugged, low-cost, compact assembly.

Available in the popular hermetically-sealed TO-8 package or a small EMI-shielded metal connectorized case, these tiny PIN-diode reflective switches, complete with driver, can operate over a 10 to 3000MHz span with a fast 2μsec switching speed.

Despite their small size, these units offer isolation as high as 40dB(typ), insertion loss of only 1.1dB(typ), and a 1dB compression point of +27dBm over most of the frequency range. All models are TTL-compatible and operate from a dc supply voltage of 4.5 to 5.5 V with 1.8mA quiescent current.

Switch to Mini-Circuits for highest quality innovative products...and leave the driving to us.

finding new ways ...
setting higher standards

Mini-Circuits

A Division of Scientific Components Corporation
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500
Fax (718) 332-4661 Domestic and International Telexes: 6852844 or 620156

WE ACCEPT AMERICAN EXPRESS

SPECIFICATIONS

	TOSW-230 ZSDR-230		TOSW-425 ZSDR-425	
	10-3000		10-2500	
Freq. Range(MHz)				
Insert. Loss (dB)	typ.	max.	typ.	max.
10-100MHz	1.3	1.9	1.3	1.7
100-1500MHz	1.1	1.9	1.1	1.7
1500-3000MHz	1.8	2.7	1.8	2.5
Isolation(dB)	typ.	min.	typ.	min.
10-100MHz	60	40	60	40
100-1500MHz	40	28	40	30
1500-3000MHz	35	22	35	22
1dB Compression(dBm)	typ.	min.	typ.	min.
10-100MHz	17	6	17	6
100-1500MHz	27	19	27	19
1500-3000MHz	30	28	30	28
VSWR(ON)	typ.	max.	typ.	max.
	1.3	1.6	1.3	1.6
Switching Time (μsec)	typ.	max.	typ.	max.
(from 50% TTL to 90% RF)	2.0	4.0	2.0	4.0
Oper. Temp.(°C)	-55 to +100		-55 to +100	
Stor. Temp.(°C)	-55 to +100		-55 to +100	
Price (10-24)	\$39.95		\$59.95	
(1-9)	\$89.95		\$109.95	



On the cover: Part 2 of EDN's Product Showcase No. 29 covers a multitude of products in four technology areas: instruments, computers and peripherals, computer-aided engineering, and components. Leading off the product sections are staff-written articles on in-circuit emulators for μ Cs (pg 64); add-in graphics boards for PC/AT bus, VMEbus, and Multibus systems (pg 114); mixed analog-digital simulators (pg 160); and solid-state relays (pg 190). (Illustration by Thomas Szumowski; art direction by Ken Racicot)

DESIGN FEATURES

Instruments

In-circuit emulators for μ Cs probe software activity in a closed environment 64

Tricky techniques allow in-circuit emulators (ICEs) for μ Cs to peer into the inner workings of the single-chip devices, helping you to develop faster and more reliable software in a shorter period of time.—*Steven H Leibson, Regional Editor*

Computers and Peripherals

Add-in graphics boards available for three major buses 114

As powerful microprocessors such as the 80386 and 68030 become commonplace in PC/AT bus, VMEbus, and Multibus I and II systems, these systems require equally powerful graphics boards.—*Margery Conner, Regional Editor*

Computer-Aided Engineering

Mixed analog-digital simulators are picking up speed 160

Whether you need a simulator for chip-level, board-level, or system-level design, products to meet your needs are beginning to proliferate.—*Doug Conner, Regional Editor*

Components


Solid-state relays satisfy a wide range of switching needs 190

In diverse applications, ranging from replacing reed relays in low-power tasks to high-performance military needs, solid-state relays switch at higher speeds and have longer operating lifetimes than electromagnetic relays.—*Tom Ormond, Senior Editor*

Continued on page 7

EDN® (ISSN 0012-7515) is published 49 times a year (biweekly with 2 additional issues a month, except for February, which has 3 additional issues and July and December which have 1 additional issue) by Cahners Publishing Company, A Division of Reed Publishing USA, 275 Washington Street, Newton, MA 02158-1630. Terrence M McDermott, President; Frank Sibley, Senior Vice President/General Manager, Boston Division; Jerry D Neth, Senior Vice President/Publishing Operations; J J Walsh, Senior Vice President/Finance; Thomas J Dellamaria, Senior Vice President/Production and Manufacturing; Ralph Knupp, Vice President/Human Resources. Circulation records are maintained at Cahners Publishing Company, 44 Cook Street, Denver, CO 80206-5800. Telephone: (303) 388-4511. Second-class postage paid at Denver, CO 80206-5800 and additional mailing offices. POSTMASTER: Send address corrections to EDN® at the Denver address. EDN® copyright 1989 by Reed Publishing USA; Ronald G Segel, Chairman and Chief Executive Officer; Robert L Krakoff, President and Chief Operating Officer; William M Platt, Senior Vice President. Annual subscription rates for nonqualified people: USA, \$105/year; Canada/Mexico, \$125/year; Europe air mail, \$150/year; all other nations, \$150/year for surface mail and \$230/year for air mail. Single copies are available for \$10. Please address all subscription mail to Eric Schmieder, 44 Cook Street, Denver, CO 80206-5800.

THE POWER SUPPLY

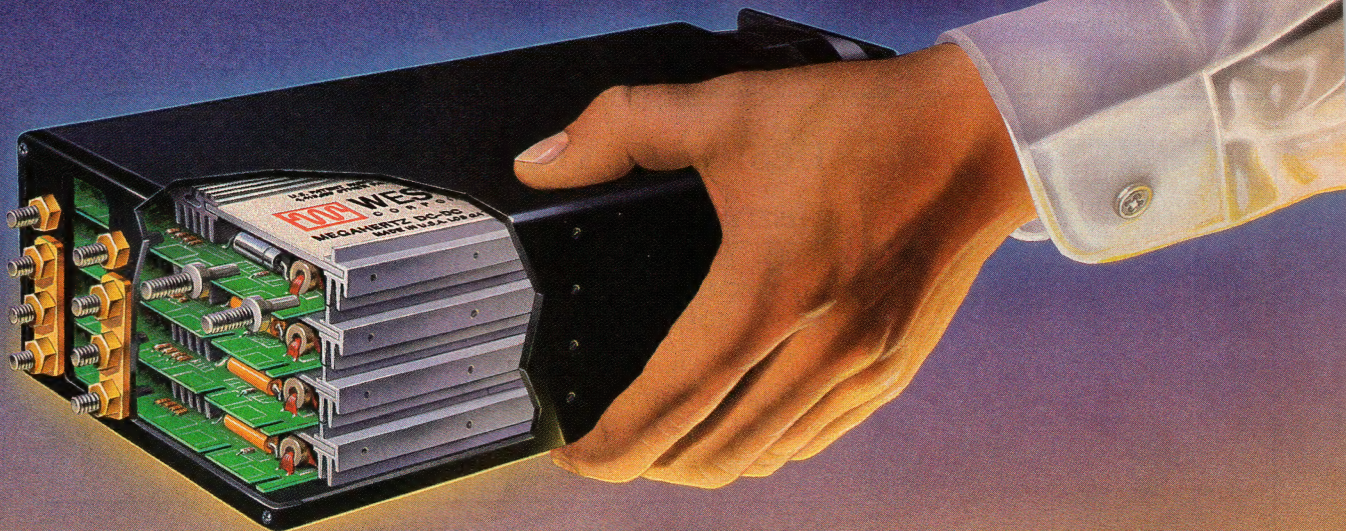

REDEFINED


THE WESTCOR STAKPAK™. NEW GENERATION 250 TO 1200 WATT SINGLE OR MULTIPLE OUTPUT OFF-LINE SWITCHER. 3.2 X 5.5 X 11.4 INCH CASE. FAN-COOLED.

Stack the odds in your favor by designing-in Westcor's 6 watt/cubic inch high power megahertz switcher. Capitalizing on patented and proven megahertz module technology and innovative thermal management techniques, the StakPak provides up to 1200 watts of power at 50°C with 1 to 8 isolated and fully regulated outputs.

For existing designs the StakPak's small size and low profile allow system enhancement without mechanical redesign. Simply replace your open frame switcher with up to 1200 watts of StakPak power or replace your "box switcher" with 2 StakPaks and realize up to twice the power without losing additional space. StakPak power factor correction provides 850 watts of output power from a standard 115 VAC wall outlet. In new designs, more space can be devoted to functionality or the system can be downsized.

The StakPak's 8 module output section can be factory configured in virtually an infinite number of voltage, current and power combinations. Special models providing between 250 to 1200 watts and outputs from 2 to 95 VDC are available.

Other features include outstanding electrical performance; UL, CSA, VDE safety agency approval (in process); variable speed fan option for low ambient noise environments and 3 phase or DC input options. Indeed, with unprecedented power density, versatility and new features, the StakPak redefines power packaging. Please contact Westcor for a data sheet, pricing and additional information.

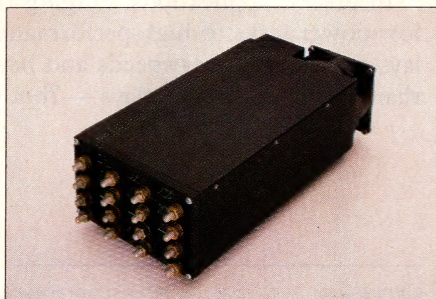

STANDARD 1200 WATT STAKPAK MODELS (110/220 VAC input)

Model Output Voltage (VDC) and Maximum Current (amperes) per Channel

	#1	#2	#3	#4	#5
Single Output					
SP1-1801	2 @ 240				
SP1-1802	5 @ 240				
SP1-1803	12 @ 100				
SP1-1804	15 @ 80				
SP1-1805	24 @ 50				
SP1-1806	28 @ 42				
SP1-1807	48 @ 25				

Total output power may not exceed 1200 watts for any model, single or multiple output. Lower power StakPak models are available. Please contact the factory.

Dual Output		
SP2-1801	2 @ 120	5 @ 120
SP2-1802	5 @ 120	5 @ 120
SP2-1803	5 @ 120	12 @ 66
SP2-1804	12 @ 66	12 @ 66
SP2-1805	15 @ 53	15 @ 53

Triple Output			
SP3-1801	5 @ 180	12 @ 16	12 @ 16
SP3-1802	5 @ 150	12 @ 33	12 @ 16
SP3-1803	5 @ 180	15 @ 13	15 @ 13
SP3-1804	5 @ 150	15 @ 26	15 @ 13

Quad Output				
SP4-1801	5 @ 150	12 @ 16	12 @ 16	5 @ 30
SP4-1802	5 @ 150	15 @ 13	15 @ 13	5 @ 30
SP4-1803	5 @ 150	12 @ 16	12 @ 16	24 @ 8
SP4-1804	5 @ 150	15 @ 13	15 @ 13	24 @ 8


Five Output					
SP5-1801	5 @ 120	12 @ 16	12 @ 16	5 @ 30	24 @ 8
SP5-1802	5 @ 120	15 @ 13	15 @ 13	5 @ 30	24 @ 8



WESTCOR CORPORATION • 485-100 Alberto Way • Los Gatos, CA 95032 • (408) 395-7050 • FAX (408) 395-1518

Westcor is a subsidiary of  VICOR CORPORATION

CIRCLE NO 15

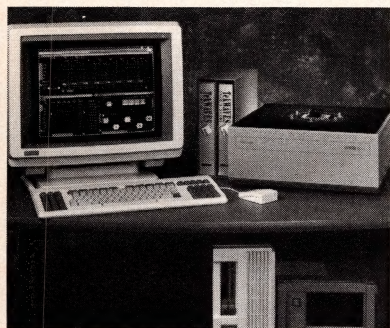

EDN's Product Showcase provides descriptions of a host of items, beginning with instruments on pg 87. Coverage continues with details of computers and peripherals (pg 131), computer-aided engineering (pg 173), and components (pg 199).

EDN magazine
now offers
Express Request,
a convenient way
to retrieve product
information by
phone. See the
Reader Service
Card in the front
for details on how
to use this free
service.

Express Request 

PRODUCT UPDATES

EEPROM-based programmable filter	57
PC-based DSP add-in card	59
Power driver IC	60
In-circuit emulator	62

PRODUCT REVIEWS

Instruments	87
Generating, measuring, and viewing instruments; testing devices and development systems.	
Computers and Peripherals	131
All computer equipment, packaged and board level, including interfaces.	
Computer-Aided Engineering	173
Workstations and computer-aided engineering software.	
Components	199
Relays, potentiometers, switches, keyboards, displays, capacitors, resistors, fiber-optic sources and detectors, all function modules.	

LITERATURE

Power Sources	231
Integrated Circuits	237
Hardware and Interconnect Devices	243
Software	246

Continued on page 9

Cahners Publishing Company, A Division of Reed Publishing USA ☐ Specialized Business Magazines for Building & Construction ☐ Manufacturing ☐ Foodservice & Lodging ☐ Electronics & Computers ☐ Interior Design ☐ Printing ☐ Publishing ☐ Industrial Research & Technology ☐ Health Care ☐ and Entertainment. Specialized Consumer Magazines: ☐ American Baby ☐ and Modern Bride.



THE UNISITE PROGRAMMER: BECAUSE STATE-OF-THE-ART IS A STATE OF CHANGE.

PROGRAMMING TECHNOLOGY THAT SUPPORTS ADVANCED DESIGNS— TODAY AND TOMORROW.

The UniSite™'s universal programming technology is the fastest and easiest way to keep up with new devices and packages. Its software-configured pin driver system provides a single site for programming any DIP device up to 48 pins, including PLDs, PROMs, IFLs, FPLAs, EPROMs, EEPROMs and microcontrollers.

The optional ChipSite™ module supports logic, memory and microcontrollers in the most popular surface-mount packages—PLCCs, LCCs and SOICs. Or add SetSite™ to gang program up to eight 40-pin EPROMs, or set program a single file into multiple EPROMs.

INSTANT ACCESS TO NEW DEVICES.

The UniSite's device algorithms and system software are stored on 3½"



micro diskettes, which are updated several times per year. To update the UniSite, simply load new master diskettes.

FAST, EASY PROGRAMMING. Menu-driven operation with step-by-step prompts makes programming simple. For added convenience, you can operate the UniSite from an ASCII ter-

minal or from a PC using the provided terminal emulator. On-screen help messages are available throughout operation.

To speed parts selection, the UniSite provides a built-in list of devices by manufacturer name and number. You can also save your most frequently used programming parameters and jobs for instant recall.

DESIGN FREEDOM FOR TOMORROW.

When leading-edge designers need to use the latest devices, they need the programming freedom only the UniSite provides. Call Data I/O® today, and ask about the UniSite. Because state-of-the-art never stops changing.

1-800-247-5700

Ext. 671

DATA I/O
Corporation

Data I/O Corporation 10525 Willows Road N.E., P.O. Box 97046, Redmond, WA 98073-9746, U.S.A. (206) 867-6899/Telex 15-2167

Data I/O Canada 6725 Airport Road, Suite 302, Mississauga, Ontario L4V 1V2 (416) 678-0761

Data I/O Europe World Trade Center, Strawinskylaan 633, 1077 XX Amsterdam, The Netherlands +31 (0)20-6622866/Telex 16616 DATIO NL

Data I/O Japan Sumitomoseimei Higashishinbashi Bldg., 8F, 2-1-7, Higashi-Shinbashi, Minato-Ku, Tokyo 105, Japan
(03) 432-6991/Telex 2522685 DATAIO J

VP/Publisher
Peter D Coley

Editor/Editorial Director
Jonathan Titus

Managing Editor
John S Haystead

Assistant Managing Editor
Joan Morrow

Special Projects
Gary Legg

Home Office Editorial Staff
275 Washington St, Newton, MA 02158
(617) 964-3030

Tom Ormond, *Senior Editor*
Joanne De Oliveira, *Associate Editor*
Jay Fraser, *Associate Editor*
John A Gallant, *Associate Editor*
Michael C Markowitz, *Associate Editor*
Dave Pryce, *Associate Editor*
James P Scanlan, *Associate Editor*
Julie Anne Schofield, *Associate Editor*
Charles Small, *Associate Editor*
Dan Strassberg, *Associate Editor*
Anne Watson Swager, *Associate Editor*
Chris Terry, *Associate Editor*
Kathleen M Vejvoda, *Associate Editor*
Helen McElwee, *Senior Copy Editor*
Susan L Infantine, *Senior Production Editor*
Christine McElvenny, *Production Editor*
Brian Tobey, *Production Editor*

Editorial Field Offices

Margery S Conner, *Regional Editor*
Atascadero, CA: (805) 461-9549

Doug Conner, *Regional Editor*
Atascadero, CA: (805) 461-9669

Steven H Leibson, *Regional Editor*
Boulder, CO: (303) 494-2233

J D Mosley, *Regional Editor*
Arlington, TX: (817) 465-4961

Richard A Quinnell, *Regional Editor*
San Jose, CA: (408) 296-0868

Maury Wright, *Regional Editor*
San Diego, CA: (619) 748-6785

Contributing Editors

Robert Pease, Bob Peterson,
Don Powers, Bill Travis

Editorial Services

Kathy Leonard, *Editorial Coordinator*
Nancy Weiland, Helen Benedict

Art Staff

Ken Racicot, *Senior Art Director*
Chinsoo Chung, *Associate Art Director*
Cathy Filipski, *Staff Artist*
Martha Crowell, *Staff Artist*

Production/Manufacturing Staff

Andrew A Jantz, *Production Supervisor*
Danielle M Biviano, *Production Manager*
Deborah Hodin, *Production Assistant*
Sandy Wucinich, *Production Assistant*
Diane Malone, *Composition*

Director of Art Department

Joan Kelly
Norman Graf, *Associate*

VP/Production/Manufacturing

Wayne Hultitzky

Director of Production/Manufacturing

John R Sanders

Business Director

Deborah Virtue

Marketing Communications

Anne Foley, *Promotion Manager*
Sara Morris, *Marketing Services Administrator*
Gordon Keegan, *Promotion Specialist*

EDITORIAL

53

With all the talk about HDTV technology, we should pause to figure out who will watch it and who will pay for it.

DEPARTMENTS

News Breaks	21
Signals & Noise	35
Calendar	44
Business/Corporate Staff	259
Career Opportunities	260
EDN's International Advertisers Index	264

A product-oriented design aid

To save you time in your efforts to keep current, EDN's editors have surveyed the new-product offerings from thousands of companies, screening and selecting only the most significant of those offerings introduced in the last six months. We present our findings—the best of the best—in a format devised to make your product selection as easy as possible. You can keep this Product Showcase as a reference until the next one that covers these four key product areas appears in December.



You don't need us to tell you that all SRAMs are in short supply.

At INMOS we've met the challenge of availability by investing in increased SRAM production facilities.

The result? SRAMs that are manufactured to the highest standards, competitively priced and readily available in quantity — now and in the future.

INMOS already supplies 14% of all the SRAMs used in the US and 30% of the total European requirement — so we understand the needs of sophisticated SRAM users, including, of course, the military.

Our extensive range of fast SRAMs covers everything from 4k to 64k, including the all-important 8k×8 — all available in a variety of packages and all available “off the shelf”. A 256k SRAM is also about to be added to the range.

If you need SRAMs and you need them now, there's never been a better time to talk to INMOS.

For a copy of our 1989 Memory Databook — or, of course, a quote, contact your local INMOS or SGS-THOMSON Microelectronics office. An existing SGS-THOMSON range of SRAMs is also available.

SRAMS WITH AN INTERESTING NEW FEATURE.

AVAILABILITY.


Organisation	Part No.	Access Time (ns)	Organisation	Part No.	Access Time (ns)
4K×1	IMS 1203	20,25,35,45	64K×1	IMS 1600	20,30,35,45,55
	IMS 1203M	25,35,45		IMS 1601L	45,55
1K×4	IMS 1223	20,25,35,45		IMS 1600M	45,55,70
	IMS 1223M	25,35,45		IMS 1601LM	45,55,70
16K×1	IMS 1403	25,35,45,55	16K×4	IMS 1620	25,30,35,45,55
	IMS 1403M	35,45,55		IMS 1620M	45,55,70
	IMS 1403LM	35,45,55		IMS 1620LM	45,55,70
	IMS 1400M	45,55,70	8K×8	IMS 1624	25,30,35,45,55
4K×4	IMS 1423	25,35,45,55		IMS 1624M	45,55,70
	IMS 1423M	35,45,55		IMS 1624LM	45,55,70
	IMS 1420M	55,70		IMS 1630M	55,70
				IMS 1630L	45,55,70,100,120

Key: M — Mil-std-883C, L — Low Power. Available soon — a new 256K SRAM.



A member of the SGS-THOMSON Microelectronics Group

INMOS Limited, Aztec West, Bristol BS12 4SQ, UK. Tel: (0454) 616616.
Colorado, USA. Tel: (719) 630 4000 Munich, Germany. Tel: (089) 319 10 28 Paris, France. Tel: (1) 46 87 22 01 Tokyo, Japan. Tel: (03) 505 2840

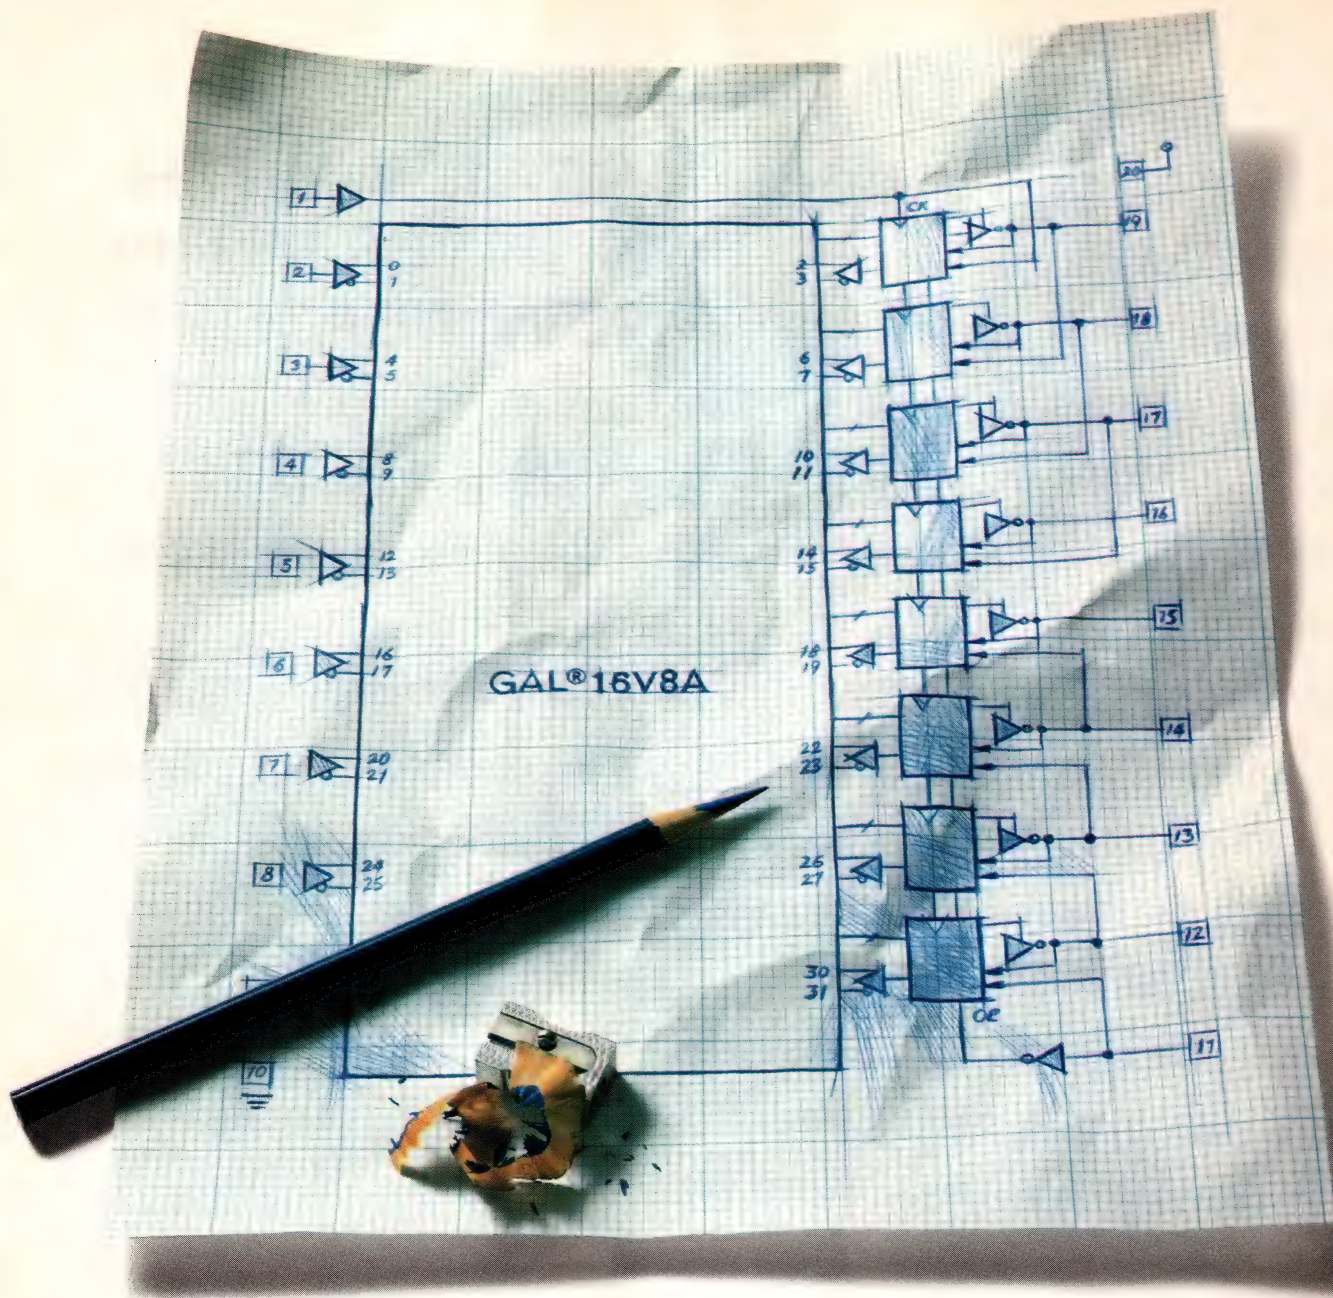

**Universal CMOS PAL
devices have always looked
good on paper.**

PURCHASE ORDER

ACE TRONICS INC.
 641 Sunny Hill Drive
 Sunnyvale, California 94088
 408-555-5500

PURCHASE ORDER NO:
0651

TO: ADVANCED MICRO DEVICES
 901 THOMPSON PLACE
 P.O. BOX 3453
 SUNNYVALE, CA 94088

SHIP TO: ACE TRONICS
 641 SUNNY HILL DRIVE
 SUNNYVALE, CA 94088

ORDER DATE		SHIP VIA		FOB	TERMS	
6/1/89		SURFACE CARRIER			30 DAYS	
ITEM	ITEM NUMBER	QUANTITY	DESCRIPTION		UNIT PRICE	EXTENDED PRICE
1	PALCE16V8H-15	1000	EE CMOS UNIVERSAL PAL DEVICE		(AS NEGOTIATED)	
2	PALCE22V10Q-25	1200	EE CMOS 22V10 QUARTER POWER PAL DEVICE			

RECEIVED
ADVANCED MICRO DEVICES

RECEIVED
 ADVANCED MICRO DEVICES

Now they look even better.

Our Universal PALCE16V8 20-pin device runs at 15ns using only 90mA. It's fully pin-out, function and fuse map compatible. Use it anywhere you'd use a GAL® device.

The PALCE22V10 is also flexible. It's just like the bipolar 22V10 with 25ns speed, but it requires as little as 55mA.

Both chips are electrically erasable which makes your life easier. And because they're 100% tested parts, you get almost perfect programming and post-programming functional yields. You can program and reprogram them until they're just the way you want them. And faster versions are on their way.

We sell more PAL® devices than all our competitors. Combined.

That means reliable, high volume supply, a huge, smart army of FAEs and all the software, programming and testing support you'd expect from the leader.

Because no matter how our universal CMOS PAL devices look on paper, they'll look a lot better in your design.

Advanced Micro Devices 

For more information write "Universal CMOS PAL Devices" on your letterhead and mail to:
 AMD Mail Operations, P.O. Box 4, Westbury-on-Trym, Bristol BS9 3DS, United Kingdom.

(In Asia) AMD Far East Ltd., Rm. 1201/2 Harcourt House, 39 Gloucester Road, Hong Kong. Attn: Andrew Ng. (In Japan) AMD Japan Ltd., Shinjuku Kokusai Bldg., 6-6-2 Nishi-Shinjuku, Shinjuku-ku, Tokyo 160, Japan


TEAC®



ED Disk



FD-235J

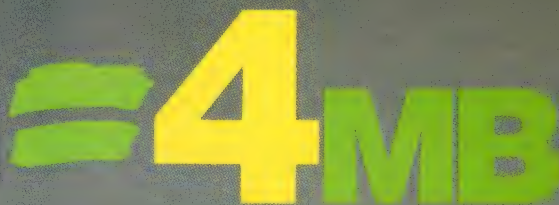

Capacity

The formula for improved performance

Perpendicular recording technology packs an extra-high recording density of 35K bpi for 4MBytes of storage capacity. And this innovative micro floppy disk drive handles reading/writing of 1- or 2-MBytes, 3-1/2" floppy disks just as easily. Low power consumption (only a DC +5 V power source) and amazingly compact design make it the perfect match for lap-top computers which depend on huge storage capacity in a small package.



3-1/2" Micro Floppy Disk Drive

FD-235J

For Memories You'll Be Glad To Have

TEAC CORPORATION 3-7-3 NAKA-CHO, MUSASHINO, TOKYO, JAPAN TEL: (0422) 52-5041 TLX: 2822451 FAX: (0422) 55-2554

■ **Hong Kong**, Nissei Sangyo Co., Ltd. Hong Kong Branch Tel: 3-343441-6; KARIN ELECTRONIC SUPPLIES CO., LTD. Tel: 3-898252 ■ **Singapore**, NISSEI ELECTRONICS, LTD. SINGAPORE BRANCH OFFICE Tel: 2357900; UAC SINGAPORE REP. OFFICE Tel: 2922608 ■ **New Zealand**, DATAMATIC NETWORKS LIMITED Tel: 09-444-0760 ■ **Australia**, AWA DISTRIBUTION Tel: 02-888-9000 ■ **Indonesia**, CHUGAI BOYEKI CO., LTD. Tel: 370824 ■ **Philippines**, COMPEX INTERNATIONAL INC. Tel: 213020 ■ **India**, Priya Electronics & Chemicals Limited Tel: 2863611 ■ **Kuwait**, Bader Al Mulla & Brothers Co. W.L.L. Tel: 2423250 ■ **United Kingdom**, TEKDATA LIMITED Tel: 0782 577677; Data Peripherals (UK) Limited Tel: 0785 57050 ■ **F.R. Germany**, nbn Elektronik GmbH Tel: 08152/390 ■ **Austria**, nbn Elektronik GmbH Tel: 0316/40 28 05 ■ **Netherlands**, SIMAC DATA B.V. Tel: 040-582933 ■ **Belgium & Luxemburg**, SIMAC ELECTRONICS SPRL/BVBA Tel: 02/252.36.90 ■ **France**, TEKELEC AIRTRONIC S.A. Tel: (1) 4534-75-35 ■ **Italy**, A.E.S.S.E. S.p.A. Tel: 02/54.64.741 ■ **Spain**, ATAIO INSTRUMENTOS S.A. Tel: 733 05 62 ■ **Switzerland**, WENGER PERIPHERALS AG Tel: 01/830 75 55 ■ **Denmark**, Dansk Binaer Teknik A/S Tel: 03/66 20 20 ■ **Sweden**, MACROTEK AB Tel: 08-733 02 20 ■ **Norway**, SCANTELE A/S Tel: (02) 65 69 20 ■ **Finland**, INSTRUMENTARIUM ELEKTRONIKKA Tel: 90-5284350

*If no distributor listed above is in your area, please contact us directly for further details about our products.

MICE®

FORETELLS YOUR DEVELOPMENT NEEDS...



MICROTEK offers a complete line of MICE (Micro-In-Circuit Emulator) for most popular 8, 16 and 32-bit microprocessors. These series of MICE are capable of debugging high speed targets without accumulating wait state, e.g. 25 MHz for 68020, 16 MHz for 68000/80C186. Protected Mode in 80386, coprocessor emulation in 16/32 bit series and bus/execution breakpoints in all series, are few examples of MICE powerful emulation features designed to meet advanced development needs.

All MICE series could work well with IBM PC/XT/AT*, IBM PS/2*, VAX*, μ VAX*, Apollo*, Sun* and NEC* 98 series. Cross assembler/compiler, symbolic debugger and high level language debugger are also available to offer optimized software tool supports to an advanced development environment.

MICE SERIES AVAILABLE MODELS

μ C	8048 Family, 8052 Family, Z8, Z88, 68HC11, 8051S/535, V25
8-BIT	8085, 6809/E, Z80, NSC800, 6502F, 64180
16-BIT	80C86/88, 80C186/188, 80286, 68000/010, 68008, V20/30
32-BIT	80386, 68020 (25 MHz)

MICROTEK

MICROTEK INTERNATIONAL INC.

HEADQUARTERS

Tel: 886-35-772155 Fax: 886-35-772598
Telex: 32169 MICROTEK

U.S.A. OFFICE

Tel: (213)321-2121 Fax: (213)538-1193
Telex: 797880 MICRO

EUROPE OFFICE

Tel: 49(211)556181 Fax: 49-211-572362
Telex: 8584020

• AUSTRIA ALLMOS ELECTRONIC (222)6271954 • BELGIUM SIMAC ELECTRONICS B.V. (2)2523690 • DENMARK SC METRIC A/S (2)804200 • ENGLAND ARS MICROSYSTEMS (276)685005 • FINLAND OY COMDAX AB (0)670277 • FRANCE M.T.E. (1)39618228 • ITALY PRATICA SRL (11)503427 • NETHERLANDS SIMAC ELECTRONICS B.V. (40)582911 • NORWAY MORGENSTIERNE & CO A/S (2)358110 • SPAIN NOVATRONIC, S.A. (4)4520811 • SWEDEN NORDISK ARRAYTEKNIK AB (8)7349935 • SWITZERLAND TRACO ELECTRONIC AG (1)2010711 • W. GERMANY ALLMOS ELECTRONIC (89)8570000 • AUSTRALIA MACRO DYNAMICS (3)7202399 • HONG KONG IDEALAND ELEC. (3)7443516 • INDONESIA PT. ASCII (21)6002305 • ISRAEL ARITMOR (3)5447475 • JAPAN CORE DIGITAL CORP. (3)7955171 • KOREA DAESANG INC. (2)7196438 • NEW ZEALAND NORTHROP INSTRUMENTS (4)856658 • PAKISTAN EAST WEST SYSTEMS (21)529827 • SINGAPORE EPE COMPUTRONICS 7468182 • THAILAND ANA-DIGIT COMPANY (2)2217040 • THAILAND SANYA PHANICH (2)225223 • ARGENTINA MICROTEC INGENIERIA S.R.L. (1)469518 • BRAZIL DIGIBYTE SISTEMAS DIGITAIS (11)2413611 • CHILE EQUIPOS INDUSTRIALES S.A.C.I. (2)716882 • SOUTH AFRICA PROTEA TEST & MEASUREMENT (011)7883710

* Registered Trademarks: PC/XT/AT, PS/2: International Business Machines; VAX, μ VAX: Digital Equipment Corporation; Apollo: Apollo Computer Inc; Sun: Sun Microsystems, Inc; NEC: NEC Corporation.

Announcing the AMM2000 AUTOMATIC MODULATION METER



*A portable light weight instrument for field or bench use.
Uncompromisingly capable. Competitively priced.*

ABRIDGED SPECIFICATION

AM

Maximum level: 99%
Modulation rates: 10Hz to 75kHz

FM

Maximum deviation: ± 500 kHz peak
Modulation rates: DC/10Hz to 300kHz

PM

Maximum deviation: ± 500 rad
Modulation rates: 50Hz to 15kHz

Carrier frequency

Range: 250kHz to 2.4 GHz
Sensitivity: -30 dB (1GHz), -20 dB (2GHz)

Carrier level

Range: -6 dBm to $+20$ dBm
Resolution: 0.1dB

AF counter

Range: 50Hz to 300kHz
Resolution: 0.1Hz

AF distortion

Frequencies: 300Hz, 1kHz
Accuracy: ± 1 dB

AF voltmeter

Level: 10mV rms to 10V rms
Bandwidth: 50Hz to 100kHz
Accuracy: ± 1 dB

General

Level display modes: Abs, Rel% or dB, pk hold
Detection modes: +pk, -pk, pk-pk/2, rms, $\sqrt{2}$ rms
Post detect filters: CCITT P53A, CCIR 468-3

Memory: 100 panel set ups
Remote program: GPIB and RS-232-C
Power: 90-264V ac, 11.5V dc, 30VA
Reverse power protection: 25W
Dimensions/weight: 145H x 330W x 405D, 9kg

Options

A: 23-30V dc input
C: Rechargeable 4Ah add-on battery pack
E: Rack mounting kit
F: RF output on rear panel
G: Padded carrying case
O: High stability frequency reference
Q: Distortion measurement

... from



For more detailed information contact:

FARNELL INTERNATIONAL · WETHERBY · ENGLAND · LS22 4DH · TELEPHONE +44 937 61961 · FAX +44 937 66487

NEW SMD OUTLINE FROM PHILIPS.

SOT-223...REAL 1W PERFORMANCE ON PRINTED CIRCUIT BOARDS!

Accepts extensive range of crystals up to 2.5mm square.

Kinked leads absorb thermal stress, preventing damage to crystal.

Tab position leaves base free to be glued for wave soldering.

Dissipates a full 1W on printed circuit boards and 2W on ceramic substrates, without extra cooling.

An extensive range of crystals - rectifiers, diodes, thyristors, and both MOS and bipolar transistors up to 10 GHz can be put into the versatile SOT-223 outline. This feature, combined with the excellent heat dissipating property of SOT-223 means that you can now benefit from SMD technology in a wider range of applications.

But that's just the start. SOT-223 offers you power-*plus* an impressive list of board-mounting benefits.


- Design ensures level mounting eliminating hot-spots, and also allows visual inspection of solder joints.
- Supplied on standard 12mm tape for speed and simplicity of automated placement.
- Optimised for mounting onto both printed circuit boards and ceramic substrates using all current soldering techniques including wave and reflow.
- Can be mounted on the same solder pad design as the D-pack outline.

Benefit from this breakthrough now!

For designers in consumer electronics, automotive, telecommunications, EDP industries etc., SOT-223 is a major advance in SMD technology. Get the full facts fast. Complete and post the coupon, today!

Philips Components, MC Department (Building BA)
P.O. Box 218, 5600 MD Eindhoven, The Netherlands

SMD
TECHNOLOGY

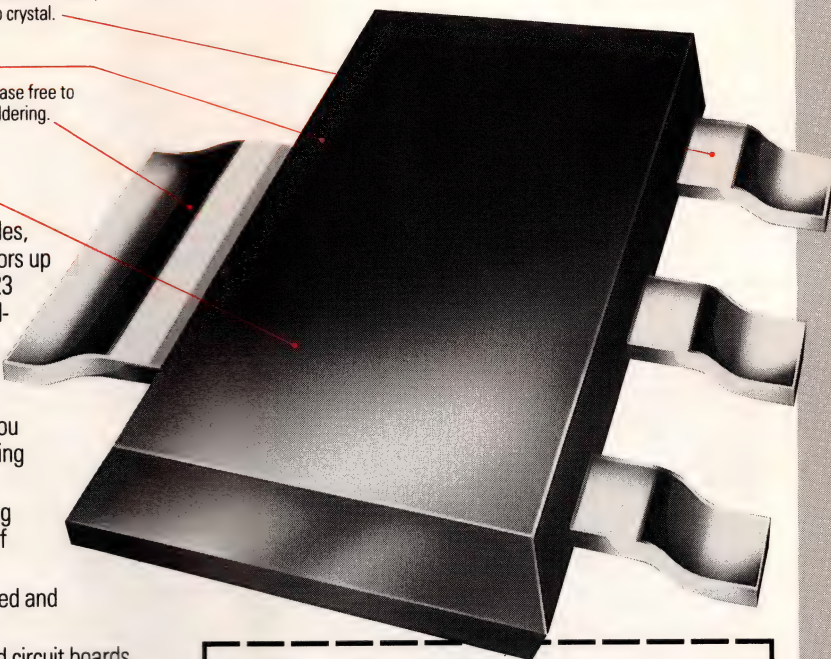

Please send me full details of the new Philips SOT-223 SMD package, fast.

NAME _____

STATUS _____

COMPANY _____

ADDRESS _____

TELEPHONE NO. _____

Philips Components, MC Department (Building BA)
P.O. Box 218, 5600 MD Eindhoven, The Netherlands


EDN072089

Philips Components





Even though we've been around the electronics industry for seventy-five years, we still have the same perspective.

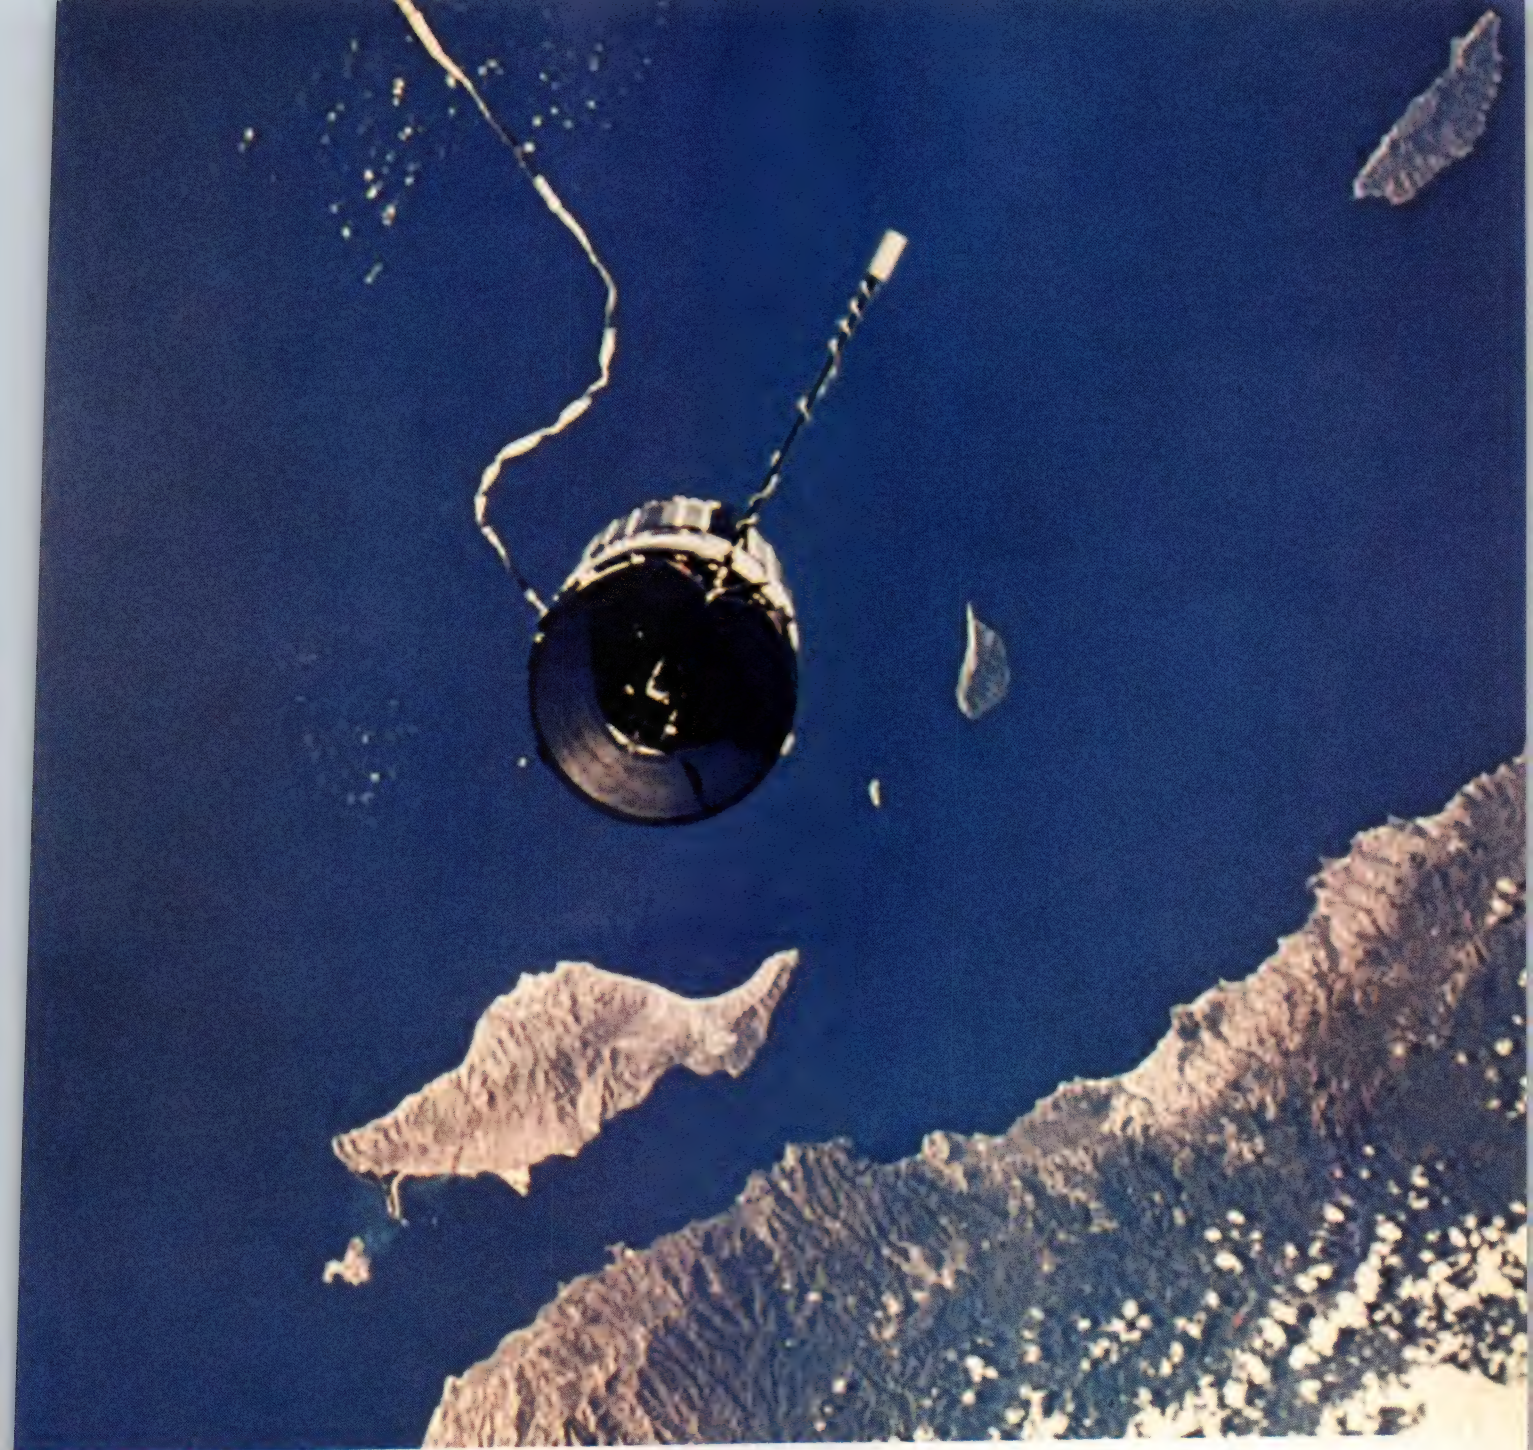

Innovation. Ever since we made our first impression on the industry seventy-five years ago, the companies of ITT EMC Worldwide have been designing for the future. That's why you'll continue to find our products in everything from telecommunications to some of today's most advanced satellite technology.

Our dedication to innovation has made us industry leaders in a variety of markets, all around the world. Supplying switches, relays, cable assemblies, test accessories and

of course, connectors.

So, when you do business with ITT EMC Worldwide, you have access to all of our diverse industry knowledge and expertise. You also have the assurance that our top engineers are working together with you, from start to finish.

Our philosophy is simple. If we stay ahead, you stay ahead. That's why we're constantly advancing technology, rather than letting technology advance us.

If you'd like more information

about our capabilities, drop us a line today. You may know us for all the things we've done. But the best is yet to come.

*1851 East Deere Avenue
Post Office Box 35000
Santa Ana, CA 92705-6500
Or call (714) 261-5300*

ITT ElectroMechanical
Components Worldwide
Discover our strengths.



If you miss the window, the profit picture changes.

■ Well-timed market entry contributes to profit and market share. ■ Orbit Semiconductor is the manufacturing service that enables you to meet critical market windows. ■ **QUICK TURNAROUND** is guaranteed on engineering prototypes and volume production IC runs. ■ **CUSTOM** process development and **HI-REL** processes available for military, medical and industrial products. ■ State of the art MOS processes support **DIGITAL**, **MIXED ANALOG/DIGITAL**, and **CCD** designs. ■ Noncompetitive second sourcing is guaranteed since service and quality are our **ONLY** standard products. ■ Make a well-timed call to Orbit Semiconductor and find out how responsive semiconductor manufacturing can add to your profit picture. ■ Orbit Semiconductor, Inc. 1230 Bordeaux Drive. Sunnyvale, CA 94089. Twx 910-339-9307, FAX (408) 747-1263. Or call (800) 647-0222 or (408) 744-1800.



A subsidiary of Orbit Instrument Corporation.

What others promise, we guarantee.

REGIONAL REPRESENTATIVES: East Coast (609) 428-6060. - Midwest (303) 530-4520 - West Coast (408) 241-8111, (714) 253-4626, (602) 996-0635, (602) 293-1220, (505) 888-0800.
INTERNATIONAL REPRESENTATIVES: Canada (514) 481-3313 - U.K. Phone (0372) 377779, Tlx 897628 S.G. U.K.-G, Fax (0372) 376848 - Europe Phone (06031) 61076, Tlx 6031 948,
FAX (06031) 61788 - Australia Phone (8) 223 5802, Tlx UNIVAD AA89141, Fax (8) 224 0464.

NEWS BREAKS

EDITED BY JULIE ANNE SCHOFIELD

DSP μ P SPEED INCREASED TO 27 MHz

Motorola's Microprocessor Products Group (Austin, TX, (512) 891-2030) has announced the availability of a faster version of its digital signal processor, the 56001. The 30% increase in throughput, from 20.5 to 27 MHz, lets the faster 56001 execute as many as seven tasks simultaneously and perform instructions at 13.5 MIPS. Software for systems based on the original version of the 56001 will run on the faster version with no modifications. The 27-MHz 56001 is available now in a pin-grid-array package for \$144 (1000).—Anne Watson Swager

GaAs ICs FEATURE CLASS S MILITARY SCREENING

Triquint Semiconductor (Beaverton, OR, (503) 644-3535) is now shipping wafers and dies screened to US Department of Defense Class S requirements. This level of screening permits the use of the company's GaAs ICs in satellite systems. Triquint also offers packaged ICs screened to Class B requirements in accordance with MIL STD 883 test methods 5004 and 5005. The company's future plans include providing devices that meet MIL-Q-9858 approval by the spring of 1990 and devices that meet MIL-M-38510 approval by the fall of 1990. These approval ratings will let customers use Triquint's GaAs ASICs and standard products in earthbound DoD systems.—Anne Watson Swager

MAXIM/VTC ALLIANCE YIELDS HIGH-PERFORMANCE BIPOLAR ICs

High-performance op amps and comparators are the first products to result from the recent alliance between Maxim Integrated Products (Sunnyvale, CA, (408) 737-7600) and VTC Inc (Bloomington, MN, (612) 851-5000) to jointly develop high-performance analog ICs. The products use Maxim's design expertise and VTC's complementary bipolar process, which features 6.5-GHz npn and 1.5-GHz pnp transistors. Unlike most high-performance analog ICs, these parts operate from standard digital 5 and -5.2V supplies. The Max408/VA708 is a 100-MHz op amp with a 100V/ μ sec slew rate, a 3-mV offset, and a 50-mA drive capability suitable for 50 Ω transmission lines. The device consumes a quiescent current of only 7 mA. It's also available in dual and quad packages and costs \$3.39 (100).

The MAX9690/VC7690 ECL output comparator features a 1.9-nsec maximum propagation delay and a 600-MHz operating frequency. Latched and TTL versions of the comparator are also available. The devices are available in plastic and ceramic DIPs and SOIC packages and cost \$4 (100).—Doug Conner

FIRST EISA BUS INTERFACE CHIPS UNVEILED

With the introduction of a chip set that handles the interfacing chores between add-in boards and the 32-bit Extended Industry Standard Architecture (EISA) bus, board and system designers alike are freed of the need to design their own interface circuitry for a bus whose specifications are not yet cast in concrete. The 82350 chip set from Intel Corp (Folsom, CA, (800) 548-4725) includes the 82358 bus controller, the 82357 integrated system peripheral, and the 82352 EISA bus buffer. These chips reside on the system mother board. The 82355 bus master interface controller for

NEWS BREAKS

add-in boards provides an interface between the local functions of the bus master card and the EISA bus master protocol. The chip set is available in 25- and 33-MHz versions.

Intel is sampling the chip set now; production quantities will be available in the third quarter of this year. The 82358 is \$99, the 82357 is \$120, the 82352 is \$18.75, and the 82355 is \$35 (1000).—Margery Conner

INFRARED LIGHT SERVES AS A CONNECTIVITY MEDIUM

Photonics Corp (Campbell, CA, (408) 370-3033) has developed an office-connectivity technology that uses infrared light as the medium instead of cable. Initially, the company plans to offer an end-user product called Photolink to connect RS-232C devices or Appletalk LAN nodes. Each Photolink connects by cable to one to four terminals or computers and communicates with other Photolinks by bouncing infrared light off the office ceiling. Photonics plans to extend the technology for use in token-ring, IBM 3270, and Ethernet networks, and is interested in licensing the technology for OEMs.—Maury Wright

16-CHANNEL DIGITAL VOICE RECORDER STORES 128 SEC OF AUDIO

The \$97.50 DVR-16 digital voice recorder can record and play back 16 different phrases and features a maximum recording time of 128 sec. Electronic Devices and Engineering Co (Palm Springs, CA, (619) 320-8880) offers the product in a 1-oz, 2×2×1-in. package. An unregulated 8 to 12V dc supply powers the recorder and its 1W output amplifier. The product stores 128 sec of audio by using an 8k-bit/sec digitizing rate. For highest quality, it can store 35 sec of audio by using a 32k-bit/sec rate. The company also offers the DVR-4, which has a maximum recording time of 35 sec, for \$59.50.—Maury Wright

ASSEMBLY LINES AT EXPO SMT WILL BUILD TWO PRODUCTS

Two assembly lines at Expo SMT will crank out operational products: a telephone amplifier and an "electronic jukebox" that incorporates a custom IC and several discrete LEDs. A third assembly line will demonstrate the use of fine-pitched surface-mount devices, including tape-automated-bonding parts. Expo SMT is scheduled for September 25 to 28 in Las Vegas, NV. For more information on the exposition, contact Expo SMT International (Los Gatos, CA, (408) 354-1036).—Steven H Leibson

START-UP OFFERS FAST, HIGH-DENSITY NONVOLATILE MEMORIES

Simtek Corp (Colorado Springs, CO, (719) 531-9444), a start-up semiconductor vendor determined to move nonvolatile memories into the mainstream of electronic design by making them fast and dense, has introduced its first parts: a 256k-bit EEPROM and two 64k-bit static RAMs (SRAMs) with shadow EEPROM. All employ silicon nitride for nonvolatility and require only a 5V power supply. The STK28C256 EEPROM, organized as a 32k×8-bit device, is available in speeds ranging from 70 to 120 nsec and costs \$188 to \$295 (100), depending on the speed rating. The EEPROM incorporates an internal timer and latches for address and data lines in order to simplify in-circuit programming.

15ns
16K PROM

CY7C245A

25ns
256K SRAM

CY7C199

15ns
22V10 PLD

22V10

3ns
ECL 4K SRAM

CY100E474

25ns
16Kx32 SRAM
Module

CYM1821

CY7C429

30 MHz
2Kx9 FIFO

CY7C601

24 MIPS
32-Bit RISC

Our 1989 data book sets new marks for high performance.

So call for a copy.

Arm yourself with the industry's outstanding selection of very fast, very cool circuits.

RISC. SRAM. PROM. PLD. Logic. SRAM Modules. ECL.

Seven families of circuits that can speed up your current designs.

Or give you significant new performance options for your next design.

If you are designing for performance, we have the speed you need.

**Data Book
Hotline:**

1-800-952-6300*

**Ask for dept.
C4B.**



**CYPRESS
SEMICONDUCTOR**



*1-800-387-7599 In Canada. (32)2-672-2220 In Europe. ©1989 Cypress Semiconductor, 3901 North First Street, San Jose, CA 95134 Phone: (408)943-2600, Telex 821032 CYPRESS SNJUD, TWX 910-997-0753.

NEWS BREAKS

Both SRAMs are $8k \times 8$ -bit devices that merge an EEPROM cell with each static RAM cell. The STK10C68A dedicates a pin for the read and write control of the EEPROM array, and the STK11C68A uses a pattern sequence on its address, data, and control lines to initiate EEPROM storage and recall operations. Both SRAMs are offered in 35-, 45-, and 55-nsec versions, which cost \$48.75, \$40.60, and \$32.50 (100), respectively. Samples of the EEPROM and the SRAMs will be available in the fourth quarter of 1989.—Steven H Leibson

IN-CIRCUIT EMULATOR SUPPORTS CREDIT-CARD-SIZE "PC"

Softaid Inc.'s (Columbia, MD, (301) 964-8455) Wildcard ICEalyzer is an in-circuit emulator (ICE) designed for Intel Corp.'s (Santa Clara, CA, (408) 987-8080) Wildcard. Despite its diminutive size, the credit-card-size Wildcard is a substantially complete IBM PC/XT-class machine that only lacks random-access memory. Jack Ganssle, President of Softaid, says that the tiny computer is ideal for embedded, real-time control applications that you can implement with an 8088 μP —except for one thing: To make such a small unit, Intel removed many of the "hooks" you need to connect an ICE. According to Ganssle, Intel's claim that you can develop code for the Wildcard on any PC is true, but if your code is time critical, debugging it requires an ICE's capabilities. That's where the \$5495 Wildcard ICEalyzer comes in. You unplug the Wildcard from your target system and plug in the special Wildcard attached to the ICEalyzer chassis with a ribbon cable. The Wildcard ICEalyzer includes all of the capabilities you expect in a full-featured ICE and—according to the vendor—is the first ICE to emulate an entire computer.—Dan Strassberg

ASIC VENDOR ANNOUNCES ENHANCED CAD TOOLS


Incorporating both the Logic Assistant and the Test Assistant, VLSI Technology's (San Jose, CA, (408) 434-3000) suite of design tools, called V8, is scheduled for full release in the fourth quarter of this year. The Logic Assistant integrates architectural design, analysis and partitioning, and high-level design capture in one tool. It also provides a graphical display of the results of VLSI's probabilistic fault simulator and its timing verifier. The Logic Assistant doesn't support commercial hardware-description languages, but the tool has hooks to allow their future integration.

The Test Assistant automates test-program development by letting you isolate blocks that you can test as discrete functional entities. The software inserts both isolation circuitry and the logic required to test RAM structures generated by VLSI's Built-In Self-Test compiler. Additional modules within V8 include the Gate Assistant and the Chip Assistant. The cost of V8 depends on your hardware configuration and can run to \$265,000.—Michael C Markowitz

CMOS LOGIC FAMILY ACHIEVES 3.7-NSEC PROPAGATION DELAYS

IDT (Santa Clara, CA, (408) 727-6116) has announced a C-speed version of its 74FCT logic family. The C-speed series achieves propagation delay speeds as low as 3.7 nsec with power dissipation similar to its established FCT-A series. The first four devices in the series will be the 74FCTC383 and -384 octal latches and the 74FCTC244 and -245 buffers. The buffers can drive as much as 64 mA. The parts are available in sample quantities in small-outline (SOIC) packages; they cost \$5.30 to \$6.50 (100).—Richard A Quinnell

COMPLETE FRONT PANELS

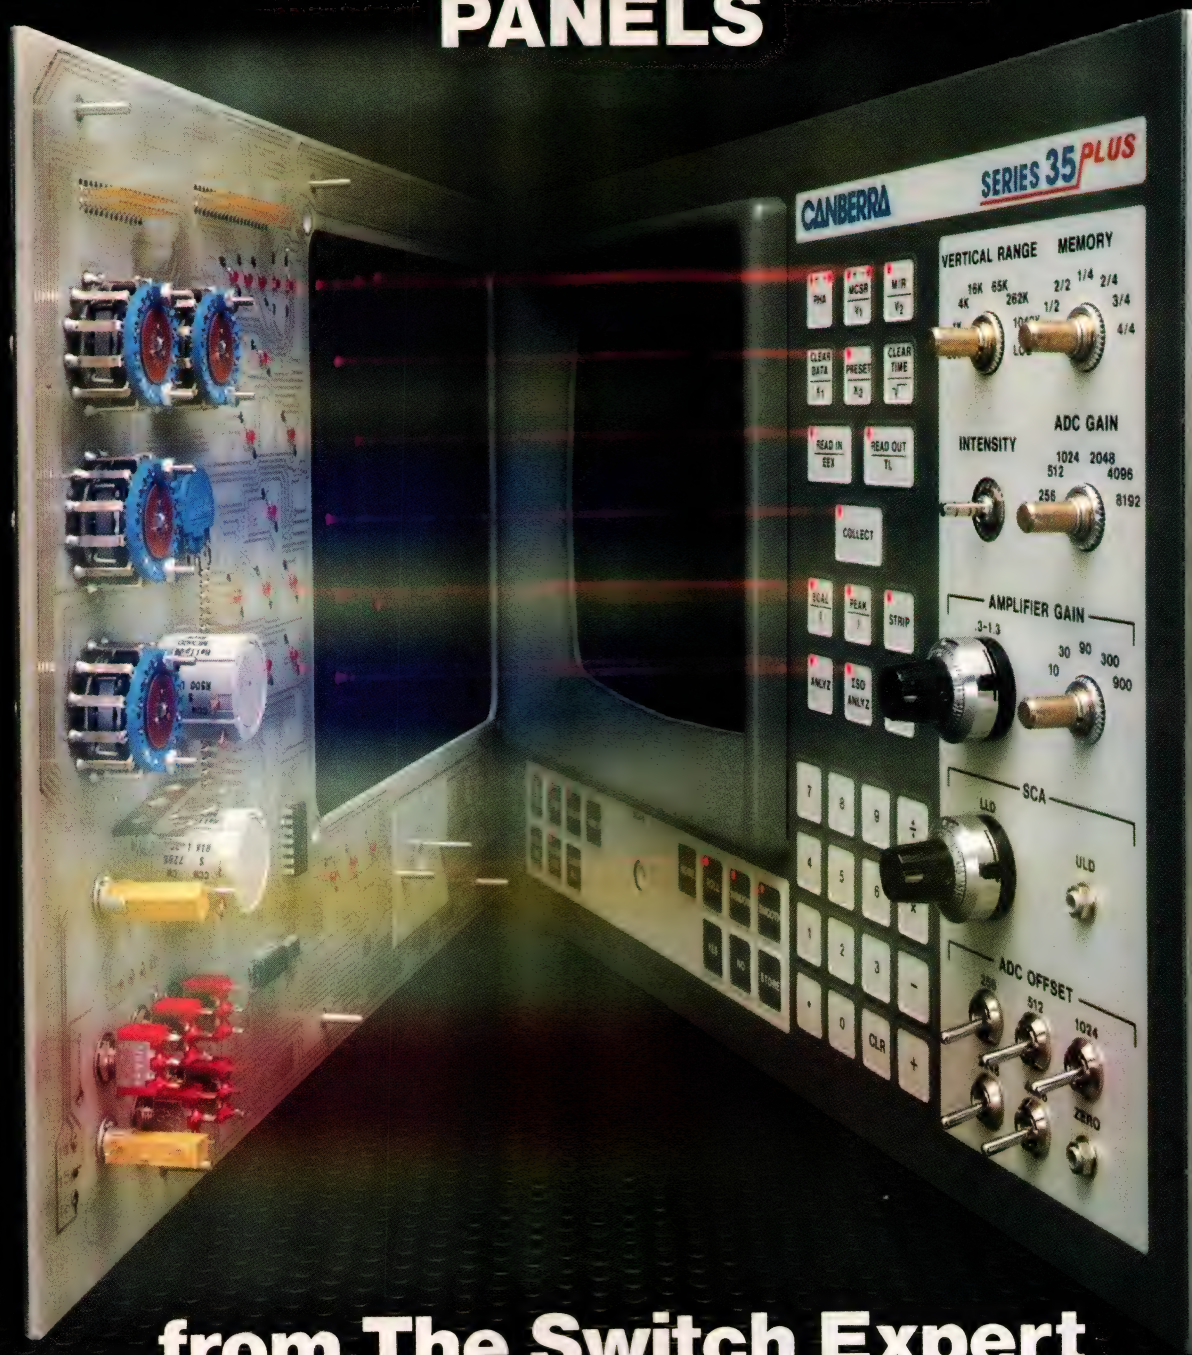

...from The Switch Expert

Reliable switching is the backbone of your front panel assemblies. When your business depends on it, choose the leader in switching technology.

RELIABLE MEMBRANE SWITCHES

Count on CRL's Monopanel[®] membrane switches for millions of failure free operations. The contacts are sealed from harsh environments and the flat front panels are easy to clean.

UNLIMITED COMPONENT SELECTION

CRL integrates displays, active and passive components, EL backlighting, tactile feel, interconnects, and bezels. Monopanel's crisp graphics, vivid colors, and true textures will captivate you.

SAVE TIME, REDUCE COST

Vertical integration and automation... CAD, graphics lab, PCB's and auto component attachment... reduces your installed cost and supplier base.

UNMATCHED EXPERIENCE

Sixty years of leadership in the design and manufacture of custom, high quality switches is your assurance of the right product, the first time.


Whether you need a quote, technical assistance, prototypes, or just-in-time delivery, call CRL for your complete front panel needs.

CRL Components, Inc.
1535 South 101 Street
West Allis, Wisconsin 53214
Telephone: (414) 256-5232
FAX: (414) 256-5252

A Cambridge Electronic Industries Company

CRL

rugged plug-in amplifiers

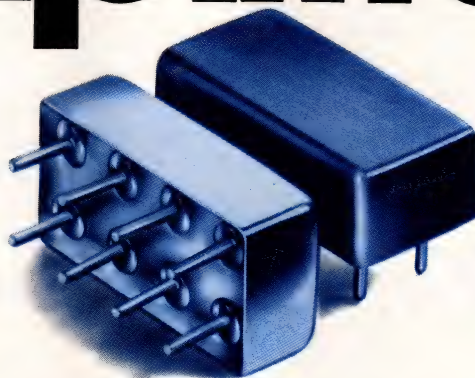

0.5 to 1000 MHz from \$13⁹⁵ (10 to 24 qty)

Tough enough to meet full MIL-specs, capable of operating over a wide -55° to $+100^{\circ}\text{C}$ temperature range, in a rugged package... that's Mini-Circuits' new MAN-amplifier series.

The MAN-amplifier's tiny package (only 0.4 by 0.8 by 0.25 in.) requires about the same pc board area as a TO-8 and can take tougher punishment with leads that won't break off. Models are unconditionally stable and available covering frequency ranges 0.5 to 1000MHz, NF as low as 2.8dB, and power output as high as +15dBm.

Prices start at only \$13.95, including screening, thermal shock -55°C to $+100^{\circ}\text{C}$, fine and gross leak, and burn-in for 96 hours at 100°C under normal operating voltage and current.

Internally the MAN amplifiers consist of two stages, including coupling capacitors. A designer's delight, with all components self-contained. Just connect to a dc supply voltage and you are ready to go.

The new MAN-amplifiers series...
another Mini-Circuits' price/performance breakthrough.

MODEL	FREQ. RANGE (MHz)	GAIN dB		MAX. OUT/PWR†	NF dB	DC PWR 12V, mA	PRICE \$ ea.
	f_L to f_U	min	flatness††	dBm	(typ)		(10-24)
MAN-1	0.5-500	28	1.0	8	4.5	60	13.95
MAN-2	0.5-1000	19	1.5	7	6.0	85	15.95
MAN-1LN	0.5-500	28	1.0	8	2.8	60	15.95
◇MAN-1HLN	10-500	10	0.8	15	3.7	70	15.95
*MAN-1AD	5.500	16	0.5	6	7.2	85	24.95

††Midband $10f_L$ to $f_{U/2}$, $\pm 0.5\text{dB}$ †dB Gain Compression ◇Case Height 0.3 In.

Max input power (no damage) +15dBm; VSWR in/out 1.8:1 max.

*Active Directivity (difference between reverse and forward gain) 30 dB typ.

finding new ways ...
setting higher standards


Mini-Circuits

A Division of Scientific Components Corporation
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500
Fax (718) 332-4661 Domestic and International Telexes: 6852844 or 620156

CIRCLE NO 28

C118 REV. E

RF transformers

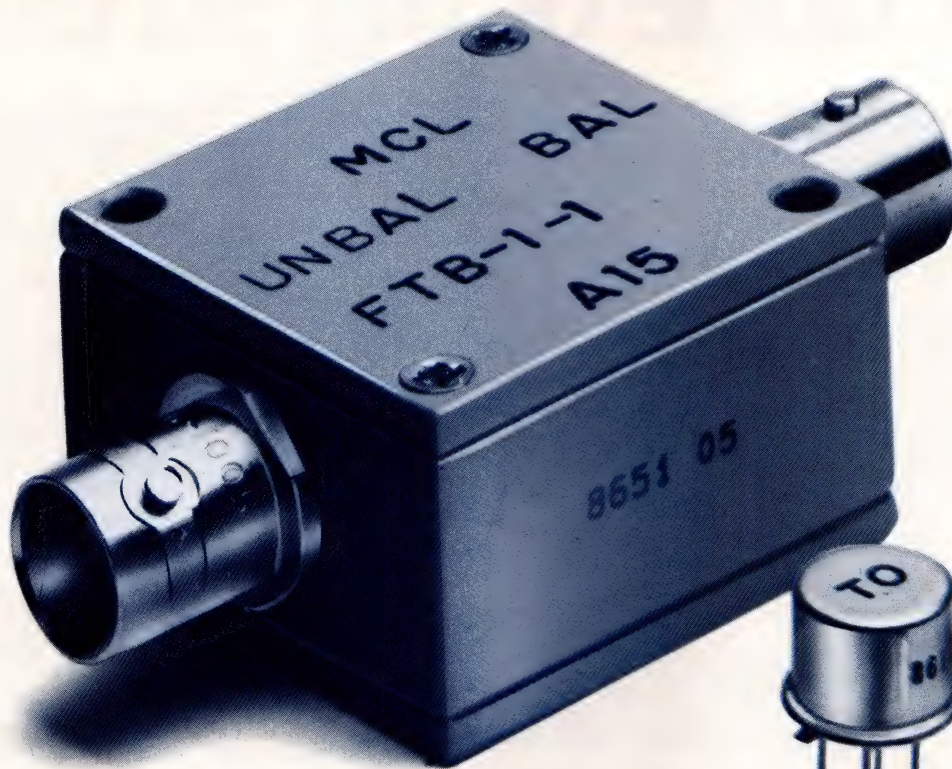


3 KHz-800 MHz
over 50 off-the-shelf models
from \$2⁹⁵

Choose impedance ratios from 1:1 up to 36:1, connector or pin versions (plastic or metal case built to meet MIL-T-21038 and MIL-T-55631 requirements*). Fast risetime and low droop for pulse applications; up to 1000M ohms (insulation resistance) and up to 1000V (dielectric withstanding voltage). Available for immediate delivery with one-year guarantee.

Call or write for 64-page catalog

*units are not QPL listed

finding new ways ...
setting higher standards


 **Mini-Circuits**

A Division of Scientific Components Corporation
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500
Domestic and International Telexes: 6852844 or 620156

C71REV.B.

CIRCLE NO 29

ASIC design with all the excitement and none of the stress.

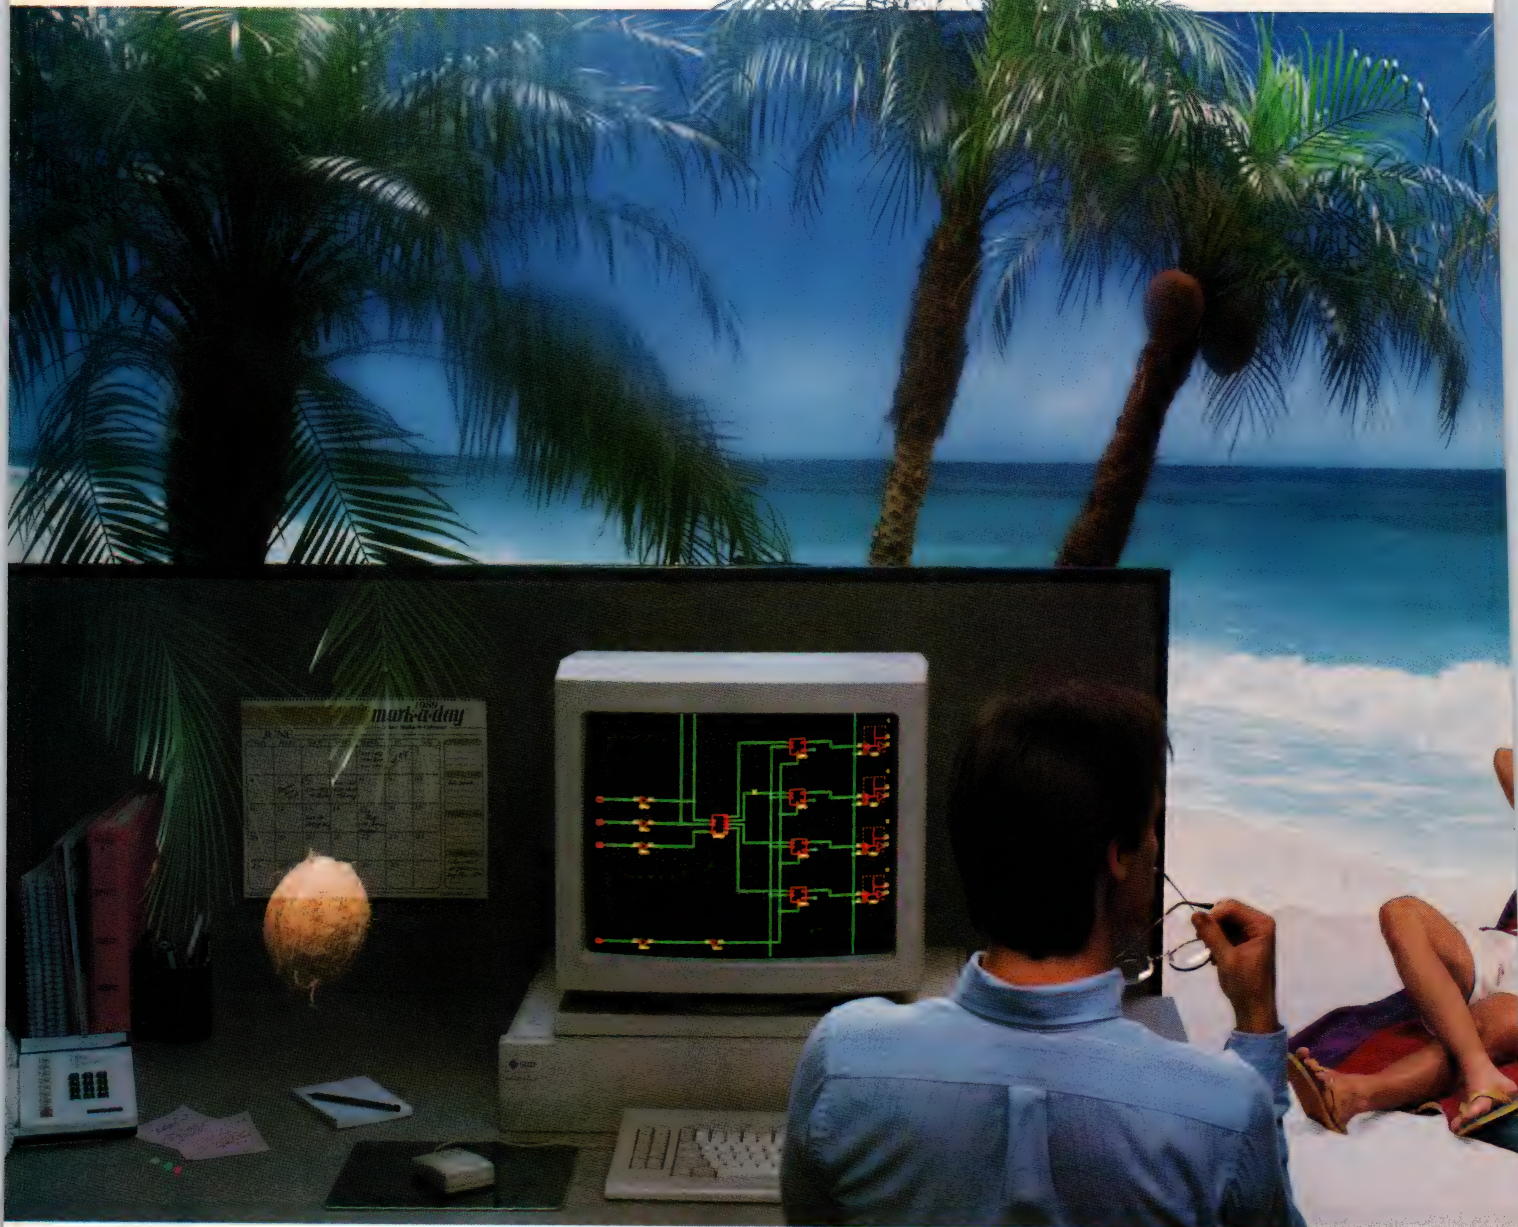

A S I C

Oki takes the pressure off with complete ASIC design support.

ASIC design opens a world of exciting possibilities for reducing size, improving system performance and increasing reliability, while lowering costs and power requirements. Make the most of this potential—and eliminate the stress—by working with Oki Semiconductor. Oki's unusually high level of design support will help you avoid the pitfalls and maximize the advantages of working with ASICs.

Complete ASIC design capabilities

Oki offers complete capabilities for channeled gate arrays, sea-of-gates, and standard cells, using advanced CMOS technology. We offer density to usable 40K gates and performance of < 0.46 ns. In addition, we support full custom design in high-voltage CMOS, BiCMOS, and bipolar technologies.

Experienced ASIC team at your service

Whether you're an ASIC design pro or tackling your first project, Oki's team of experienced design engineers is ready to assist you. We understand the pressures you're under. And we'll help you shorten development time, improve testability and manufacturability, and achieve first-time design success. We'll work with you to optimize your circuits or develop special cells. From start to finish, we'll do whatever it takes to help you succeed.

Comprehensive set of design tools

Oki has a full set of powerful mainframe design tools which ensure that your design will work, be efficient to manufacture, and perform reliably: logic, timing and fault simulations, automatic layout, detailed checking of design rules, and automatic test program generation. We support many popular workstations. Our large cell library includes many highly complex macrofunctions.

Flexible interface capabilities

We'll support your own design efforts with training, local field engineers, design kits, manuals, and libraries. Or you can work in our state-of-the-art design centers—independently or with our resident engineers—where we offer 24-hour access to private, secure, fully equipped work areas. And Oki can interface at any input level, from schematics to a simulated net list. In addition, we offer a variety of packaging options, including through-hole and surface mount, and we deliver reliable volume manufacturing.

At Oki, we can't promise an island paradise—but we can give you everything else you need for stress-free ASIC design. To get all the facts, call for our free brochure detailing Oki's ASIC capabilities.

So. Calif.
(Irvine)

714/752-1843

(Sherman Oaks)
818/990-3394

No. Calif.

(San Jose)
408/244-9666

Boca Raton, FL
407/394-6099

Atlanta, GA
(Norcross)
404/448-7111

Chicago, IL
(Rolling Meadows)
312/870-1400

Boston, MA
(Stoneham)
617/279-0293

Detroit, MI
(Livonia)
313/464-7200


New York, NY
(Poughkeepsie)
914/473-8044

Philadelphia, PA
(Horsham)
215/674-9511

Dallas, TX
(Richardson)
214/690-6868



OKI
SEMICONDUCTOR

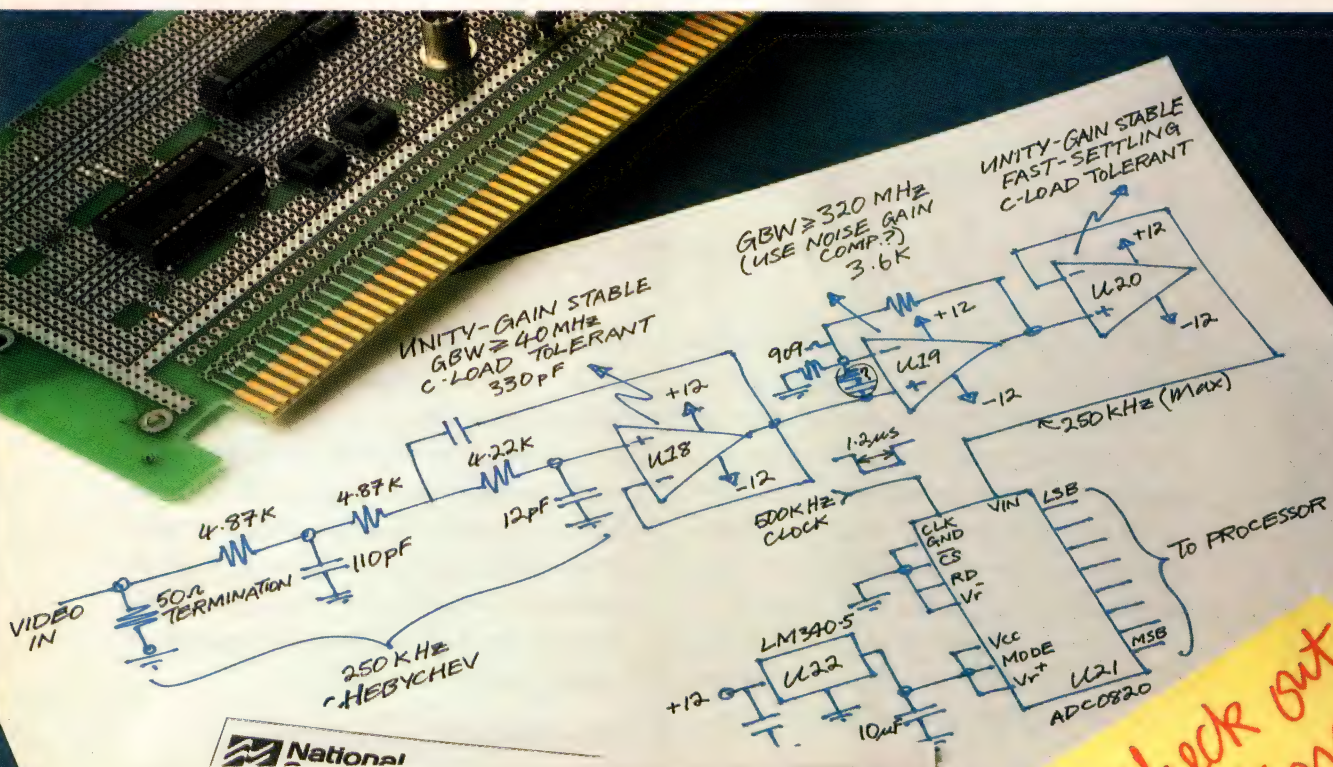

Check out National's new LM6218



LM6161/LM6261/LM6361 High Speed Operational Amplifier

General Description

The LM6161 family of high-speed amplifiers exhibits an excellent speed-power product in delivering 300 V/ μ s and 50 MHz unity gain stability with only 5 mA of supply current. Further power savings and application convenience are possible by taking advantage of the wide dynamic range in operating supply voltage which extends all the way down to +5V.

These amplifiers are built with National's new VIP™ (Vertically Integrated PNP) process which provides fast PNP transistors that are true complements to the already fast NPN devices. This advanced junction-isolated process delivers high speed performance without the need for complex and expensive dielectric isolation.

Features

- High slew rate
- High unity gain freq
- Low supply current
- Fast settling
- Low differential gain
- Low differential phase
- Wide supply range
- Stable with unlimited capacitance
- Well behaved; easy to apply

Typical AC Characteristics

Step Response; $A_v = +1$



PRELIMINARY
June 1987

LM6161/L


LM6121/L

HIGH SPEED OP-AMPS
"VIP" PROCESS



Sample LM6361
Sample LM6321

APPLICATIONS
• Video
• LANs
• C...

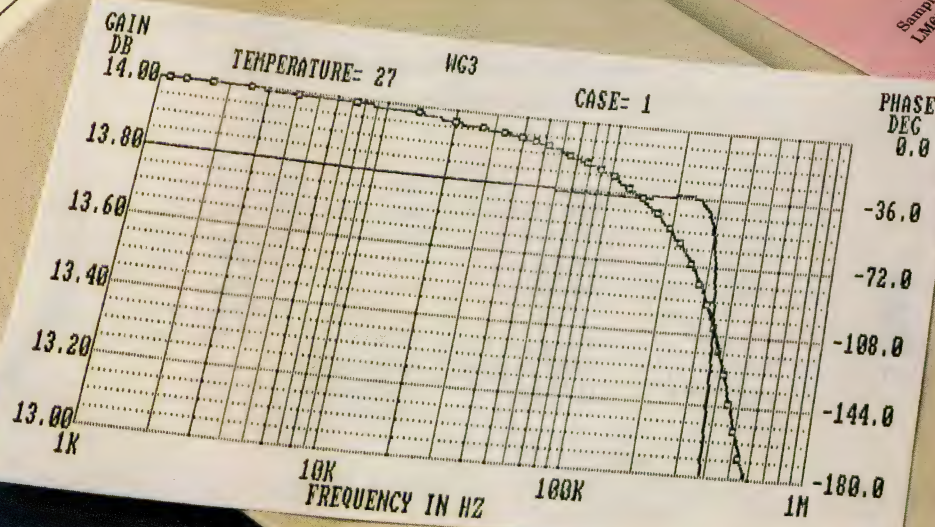

Everything you need to design-in high-speed op amps. For the price of a stamp.

OUR NEW VIP™ OP AMPS MAKE DESIGNING EASIER

Built with National's exclusive vertically integrated PNP (VIP) process, these new amplifiers couldn't be easier to design with—even for the novice.

You can use them to develop new designs never before practical. Or to enhance old designs for very little cost—in dollars, power, or real estate.

And we'll send you everything you need to get started—including a free sample. So you can see for yourself just how easy it is.

HIGHER SPEEDS, LESS POWER

These new op amps feature slew rates of 300 V/μs and gain-bandwidth products up to 750 MHz.

And they do so without complex, expensive, and power-hungry dielectric isolation techniques.

VIP op amps require no more

power than traditional op amps. You can even use the same type of circuit-building techniques—with very little supply bypassing.

Because of their unique low power dissipation, you can easily fit them into predominantly digital systems without special analog power supplies.

Our exclusive VIP process and device layout give them excellent stability. They'll drive a 330 pF capacitive load—or any other size—with no oscillation.

The LM6361 is unity gain stable, the LM6364 stable for gains above 5, and the LM6365 for gains above 25. We also offer two VIP buffers.

The latest addition to our family is the LM6218. This dual op amp has a fast settling time of 400 ns to 0.01% for a 10V step, with a slew rate of 140 V/μs.

LOWER COST

Not only are VIP op amps easier to design with than comparable devices but they cost less than a fourth as much. They are not made with expensive processes. Nor are they packaged in expensive packages.

Instead of TO-3s, they are packaged in ordinary 8-pin mini-DIP or surface-mount packaging.

They're ideal for video output states, data communications systems, graphics systems, local area networks, and sample-and-hold circuits.

MORE CHOICES

In addition to VIP, National offers no less than four other major op amp processes—bipolar, BI-FET®, CMOS, and hybrid. And each category contains many variations and subprocesses, so that you can choose the optimum building blocks for your application.

SEND FOR YOUR FREE SAMPLE KIT TODAY

All you have to do to get your free VIP sample kit is to return the coupon below. Or—if you don't have the price of a stamp—simply give us a call, toll-free at (800) 825-5805, ext. 102.

 **National
Semiconductor**

©1989 National Semiconductor Corporation

Please send me my free VIP sample kit with comprehensive data.

Name _____	Title _____
Company _____	Phone _____
Address _____	
City _____	State _____ Zip _____

ADTL03 FK12000 EDN


EDN072089

*Mail to National Semiconductor Corporation, Inquiry Processing Center,
P.O. Box 6458, Torrance, CA 90504-9953.*

Imagine it's trans and you'll understand



Introducing a 68030 VME board that makes your applications take off.



When it comes to transporting a plane-load of people at Mach 2, nothing beats the Concorde.

It's the ultimate expression of throughput.

It's also the idea behind CPU-31, the newest member of our VME/PLUS family. Transporting busloads of data at maximum speed. Providing throughput like you've never seen in a 68030-based board.

All thanks to CPU-31's unique architecture. Starting with a full megabyte of synchronized dual-port

SRAM. It's designed to provide maximum performance during dual-port, no-wait-state memory accesses. Which makes your real-time applications fly.

Then there's the VME Subsystem Bus (VSB). Which gives you wide open access to localized resources without having to contend with additional overhead traffic. It's like having an extra runway reserved only for priority flights.

And because its 32-bit DMA has a 22 MB per second transfer rate, the CPU is easily off-loaded and freed-up for other tasks.

Throughput is further improved by two message broadcasting channels, allowing simultaneous data transmission to more than one CPU. Up to 256 messages can be defined and transmitted to as many as 20 boards.

Supporting data our new VME board.



And if that still isn't enough, eight mailbox interrupts also support interprocessor communications. So you get loads of flexibility for designing multi-processing systems.

For the highest throughput, travel first class with our 20 MHz CPU-31. You'll get 1100K Whetstone and 6700 Dhrystone performance. Or business class with our 16.7 MHz version, for 900K Whetstone and 5600 Dhrystone speed.

Either way, you'll get the VMEPROM™ real-time multitasking kernel with debug monitor. It's designed to take full advantage of FORCE architecture. Best of all, it's yours at no extra charge.

And to bring your project in for a smooth landing, FORCE provides a total system solution. Including third party software along with FORCE integration

support. Plus access to our regional support staff.

For more information on the CPU-31, call FORCE at 1-800-BEST-VME. Or fax us at (408) 374-1146 for an immediate response.

If you want the highest 68030 throughput anywhere, now's the time to get on board.



VME at its best.

FORCE COMPUTERS INC.
3165 Winchester Blvd.
Campbell, CA 95008-6557
Phone (408) 370-6300
Fax (408) 374-1146

FORCE COMPUTERS GmbH
Prof.-Messerschmitt-Strasse 1
D-8014 Neubiberg/Munich
Tel: (089) 6 08 14-0 Tlx: 524 190 forc-d
Fax: (089) 6 09 77 93

© 1989 FORCE COMPUTERS INC.
VMEPROM is a trademark of Eyring Research Institute, Inc. VME/PLUS is a trademark of Force Computers, Inc.

We won't just sell you a display—we'll make sure you buy the one that's right for you.

Choosing The Right Display... (continued)

WHAT ARE THE DIFFERENCES?

OPERATING TEMPERATURE RANGE
An IEE display module operates within a temperature range of at least 0 to 50°C. If your application requires operation beyond these limits, then consider a FLUP wide temp display or a DAYSTAR NOVA LCD.

AMBIENT LIGHT RANGE
You must also consider the ambient light conditions under which you will be viewing a display. An IEE display module can be read easily in normal room light. FLUP, ARGUS, and backlit DAYSTAR NOVA can also be used in applications and sites or

Optical Characteristics
Character height, character capacity, display color, and viewing angle are all important considerations when selecting the appropriate display module. As a general rule of thumb, you should know 1 mm of character height for every foot of viewing distance. The size of your messages, as well as available panel space will determine your choice for character capacity. FLUP and ARGUS modules offer defined capabilities when used with contrast enhancement filters (which are available in a variety of colors).

Parameter	FLUP Vacuum Fluorescent	DAYSTAR NOVA LCD	ARGUS DC Plasma
Color	Blue-green spectrum, readable in blue, green, or white	Black on gray reflective technology	Green-orange or green-lime recommended for low ambient light only
Character Height Range	20 to 55 inches (5.1 to 13.9m)	34 to 1 inch (8.3 to 2.5 cm)	21 to 34 inches (5.3 to 8.6m)
Character Capacity Range	10 to 240	8 to 160	25 to 480
Viewing Angle	80-100,000 hrs. (no halogenation)	40° vertical, 80° horizontal	30,000 hrs. (no halogenation)
Display Life (Typical)			

POWER AND INTERFACE CHARACTERISTICS

Power and interface requirements will also help determine which display technology is most appropriate for a given application. DAYSTAR NOVA LCD requires, by far, the least amount of power. All three types of displays accept parallel data, and most FLUPs have a built-in serial port, as well. For remote serial operation, all three display families can also be used in conjunction with one of IEE's optional serial interface cards and power supplies.

Parameter	FLUP Vacuum Fluorescent	DAYSTAR NOVA LCD	ARGUS DC Plasma
Power Consumption	5 to 11 watts	10 to 60 mWatts (including DC backlighting)	5 to 12 Watts
Power Supply	+5VDC only (on-board voltage conversion)	+5VDC only	+5VDC, -12VDC (remote module: high-voltage +150 to +160VDC required; ARGUS: +11 to 20V (ARGUS-AH), 80-100VDC (ARGUS-AH) characters per second (ARGUS-AH) characters per second (ARGUS-AH)
Maximum Loading Rate	6,000 characters per second	10,000 characters per second	10,000 characters per second
Standard Parallel Interface	8-bit data bus—moves data, address and control information	8-bit data bus—moves data, address and control information	8-bit data bus—moves data, address and control information
Serial Input	Standard TTL level serial port, or RS-232C interface card, or RS-422 interface card	Requires optional serial interface card (discrete 20mA, TTL, DTL, or RS-232)	Discrete Character, control, and address lines (own module) 8-bit data bus (line module) Requires remote serial interface card (discrete 20mA, TTL, DTL, or RS-232)

Serial Data Conversion
For applications requiring Data Conversion Modules, data at various levels can be converted into a parallel interface—character, word, or byte—and IEE's Serial Data Conversion Modules are available.

COST CONSIDERATIONS
In general, the cost of a display module is a function of its size, viewing angle, and power consumption. However, IEE displays have many advantages.

IEE PRESENTS
4x20 ARGUS AIM
MATRIX DC PLASMA
5V POWER & ASCII

* IEE DAYSTAR NOVA
BEST AVAILABLE
TEMPERATURE RANGE
FROM -30 TO +85°C

LOW COST
48 DISPLAY

NO-FRILLS

SELECTING ALPHANUMERIC DISPLAY MODULES

IEE THE DISPLAY MAKERS

Industrial Products Division

We're here to help you. IEE offers a wide variety of display technologies in an extensive assortment of sizes and formats. But that's not all. We also can provide you with all the technical support and expertise that you'll need to select and use the right display for your application.

Choose from vacuum fluorescent, dc plasma, or liquid crystal flat panel displays.

To get you started, we'd like to send you a **free copy** of our product selector, titled *Selecting Alphanumeric Display Modules*. This informative, easy-to-understand guide contains the valuable information you'll want before buying an alphanumeric display.

Just call or write today and let the display experts show you how you can become a display expert too.



INDUSTRIAL ELECTRONIC ENGINEERS, INC.
Industrial Products Division
7740 Lemona Ave., Van Nuys, CA 91409-9234
Tel.: (818) 787-0311, Ext. 418 • Telex: 4720273 IEEINT
FAX: (818) 901-9046 (G2/G3)

SIGNALS & NOISE

Non-US engineers benefit the industry

While reading through the article "Improving working conditions for engineers: Should the IEEE do more?" by Paul Kinnucan (EDN, April 13, 1989, pg 283), I came across an interesting comment by Irwin Feerst of the IEEE on pg 286. He comments that there should be legislation to make the hiring of non-US nationals illegal.

In the first place, I completely agree with the IEEE that there is indeed a shortage of professional electrical engineers in this country to perform specialized jobs.

I disagree with Irwin Feerst's comments for two reasons: In the first place, it is simply not true that non-US engineers often work for extremely low wages; if he would care to ask any US corporation that has actively hired non-US nationals in the past, or look at the wage records, he would see his accusation bite the dust. That the Immigration and Naturalization Service (INS) approves petitions for sponsorship based on qualifications and wage offerings to non-US nationals is legal proof of this fact.

Second, it seems that he has not realized the impact that the hiring of non-US nationals has had upon the overall productivity of this country's electronics industry. When one carefully considers the various factors, one will come to the conclusion that there simply aren't enough US engineers who have the necessary advanced qualifications for various EDA/CAD/CAM positions. Irwin should also realize the scientific and technical contributions that non-US citizens have made to this country. If he picks up the recent issue of the IEEE's *Spectrum* on the N-10 (Intel 860 chip) and glances at the cover photo, he will realize that more than 40% of that team is composed of non-US nationals. Perhaps that will prove to him the gross disregard he has for achievements by "outsid-

ers." If he sees the other advancements made in Electronic Design Automation and the semiconductor industry as a whole, he will perhaps realize the contributions that have been made.

Although technology would surely advance, it would do so at a slower rate without the perseverance and dedication of a handful of these non-US nationals towards the general improvement of productivity in the electronics industry. I wish Irwin would have a realistic perception of what is going on around him, rather than making his really amusing accusations!

Congratulations on doing such a fine job with your magazine. I am an ardent reader, and I especially liked the 5-part series by Bob Pease on troubleshooting analog circuits (EDN, January 5 through March 2, 1989, issues).

M Pansare

*Engineer, Electronic CAE Support
Allied-Signal Aerospace Co
Columbia, MD*

A degree doesn't confer an education

This letter is a response to Walter Jones's letter in the March 30, 1989, issue of EDN (pg 33). Although I do agree that a well-rounded education is ideal for all students, I disagree with some of Walter Jones's comments regarding [the value of] an American degree overseas.

He quotes Ronald Kohl's statement in the October 1988 issue of *Machine Design* as stating: "in Europe and Japan a degree from an American university is considered almost meaningless." As I do not have a copy of that article, I cannot respond directly to such an inane statement.

Although a Bachelor of Science degree shows that a person has completed all the recommended courses for graduation, it is not a guarantee that he or she will fully understand all given situations.



METAL FILM RESISTORS at "S" Level

MIL-R-55182
MIL-R-39017

With Bradford Electronics, Inc., as your partner for Established Reliability metal film resistors, you can be assured of the utmost in quality and service.

Bradford has maintained "S" level qualification since 1977. Our commitment to excellence extends beyond normal requirements and includes advanced SPC programs. Bradford offers you short lead times for all RLR, RNC and RNR resistors, and a computerized system tracks on-time delivery.

Bradford can also fulfill a wide range of custom requirements for these products to satisfy unique SCD requirements.

Call and you'll discover why Bradford is fast becoming a preferred partner for so many Hi-Rel customers.

Contact: **Bradford Electronics, Inc.**
... a VISHAY Company
550 High Street
Bradford, PA 16701-0930
Phone (814) 362-5700



CIRCLE NO 34

Some of the best engineers I have known do not profess any degree. Indeed, one of the best authors of analog circuitry is Jim Williams. To my knowledge, Jim has had no formal engineering courses, yet I find his understanding and explanations to be excellent.

What must be recognized is that there is no start, nor end, to an education. It is most definitely what one makes of it. I know that sounds a bit oversimplified. The real world is the best place one can obtain a continuing education. It is a never-ending process, whether [you do it by] reading a current best seller or by reading the latest issue of EDN.

I am most grateful for receiving my BSET from California Polytechnic State University, San Luis Obispo, CA. It provided me with an excellent foundation of "learning by doing." Some of the best advice I received while I was at Cal Poly pointed out that learning is a never-ending process. I never had the opportunity to thank Mr Robert Jane-way personally, before he passed away, for his advice. I can not say it any better.

*Thomas Walter
Reutlingen
Federal Republic of Germany*

Hats off to Pease

Thanks for printing Robert A Pease's series on troubleshooting analog circuits (EDN, January 5 through March 2, 1989). Thanks also for the biographical information you supplied about Bob. You can add to Bob's attributes his willingness to help others. Several times he's sent me helpful critiques of articles I've written on voltage-to-frequency converters. And he's always been willing to provide samples of National chips so I can experiment with them before writing about them.

*Forrest M Mims, III
Contributing Editor
Modern Electronics
Seguin, TX*



SUPER POWER!

High reliability ELCOM® brushless DC servo motors are ideally suited to continuous process applications as well as demanding motion control functions in automated equipment. Optional, integrally mounted optical encoders facilitate use with latest digital control systems. Now available in 3 frame sizes and multiple lengths up to 50mm square x 100.4mm long: Continuous duty outputs to 47 oz.-in. at 7,200 rpm (1/3 hp). For complete information on how ELCOM® brushless motors can improve your design, call PITTMAN at (215) 256-6601.

PITTMAN®

HARLEYSVILLE, PA 19438-0003 USA
A DIVISION OF PENN. ENGINEERING & MANUFACTURING CORP.

© 1984 Pittman 22-c

CIRCLE NO 35



SUPERTWIST LCD MODULES

- offers all of the advantages of Supertwist technology as well as the benefit of LED backlighting
- wide viewing angle and high contrast
- LED backlight offers 50,000 hours
- Supertwist models available in 1x16, 2x8, 2x16, 2x20, 2x24 and 2x40 character formats; operating temperature: 0°C to +40°C
- New Twisted Nematic (NTN) models available in 1x16, 2x16, 2x24, 2x40, 4x20 and 4x40 character formats; operating temperature: 0°C to +50°C

DC DENSITRON CORPORATION

Information Device Division

2540 West 237th Street
Torrance, CA 90505
(213) 530-3530
FAX: G2/G3: 213-534-8419
Telex II: 910-349-6200
Europe/UK: (0959) 76600

a member of Densitron
International PLC Group

with LED BACKLIGHTING



Data Converter Choices Holding You Up?


Choosing a data converter from the stampede of products available can really hold you up. PMI's family of conversion products offers solutions that separate us from the herd.

Free up valuable PC board space with PMI's new **DAC-8043 12-bit D/A Converter** in a small 8-pin mini-DIP package. Also, scout PMI's new **DAC-8143 12-bit DAC** with serial daisy-chainable interface serial input/output pins to build board-saving, 3-wire digital interfaces. These are just two of the many exciting new products in PMI's data converter corral.

Save again with PMI's roundup of dual 12-bit D/A converters in 24-pin narrow 0.3" DIP and SO packages. Choose from parallel, single-buffered/double-buffered, and 8-bit bus interfaces.

Additionally, many of these converters feature full four-quadrant multiplying capability such as the **DAC-8408 quad 8-bit D/A converter** ideal for digitally-controlled signal level adjustments.

DAC-8043 Functional Block Diagram

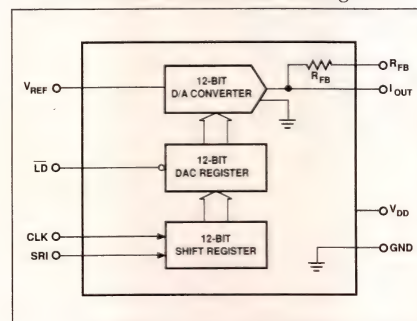

Precision Monolithics Inc.
1500 Space Park Drive
Santa Clara, California 95054

PMI offers an extensive line of 8-bit, 10-bit, and 12-bit resolution converters with improved accuracy resulting from our proprietary Si-Cr thin-film resistor technology. Single, dual, and quad DACs with current or voltage output are available. And, our pioneering **ADC-912 12-bit CMOS analog-to-digital converter** gives you the industry's lowest transition noise.

Don't be held up on price, either. PMI offers a wagon train of alternate source converters. When you see our prices, you'll know how the other vendors have been taking you to town.

To receive your complete guide to the PMI data converters, circle the reader service number below. If you can't be held up any longer, call us at **800-843-1515**.

ALTAMONTE SPRINGS: (407) 260-9780, ATLANTA: (404) 263-7995, BOSTON: (508) 794-0026, CHICAGO: (312) 250-0808, DALLAS: (214) 690-3495, DENVER: (303) 792-9595, DETROIT: (313) 930-2051, LOS ANGELES: (818) 886-6881, MILPITAS: (408) 942-8060, ORANGE COUNTY: (714) 637-9602, PHILADELPHIA: (215) 953-1070

Isolated Power MOSFETS


1000 Volts, 14mOhm, 3 Packages

One Leader.

Switch to the leader in POWER MOSFET isolated package technology, SGS-THOMSON Microelectronics, from day one you'll get isolated power that will help blast you right past your competition. The SGS-THOMSON range of power MOSFET devices in the emerging industry standard ISOTOP™ power packages is truly exceptional ranging from high voltage devices like the 1000V TSD5MG40 to high current devices like the 14mOhm TSD4M150.

The high performance ISOTOP package takes up no more real estate than a standard TO-3 but it has advantages that leave the others standing.

- 2.5 kVrms internal insulation
- Very low J-C thermal resistance $<0.25^{\circ}\text{C/W}$
- Low internal parasitic inductance $<5\text{nH}$
- Low parasitic Capacitance $<45\text{pF}$
- Improved reliability
- Reduced EMI and RFI
- Multiple mounting on a single heatsink
- Connections on track side of board
- Easy assembly
- One device replaces 4 or 5 standard devices



TM: ISOTOP, ISOWATT218 and ISOWATT220 are trademarks of the SGS-THOMSON Microelectronics Group.

Now read the bottom line - Lower costs.

If it all sounds too good to be true just check out how much it costs to use standard devices. First you'll need 4 or 5 plus all their isolating components, plus the extra heatsinks, plus the extra space you'll need to mount them. Then add on the cost of assembling all the different parts plus the cost of the extra inventory.

And even if your application is only using a couple of standard TO-218 or TO-220 packages, do a straight-device-for-device swap with SGS-THOMSON's ISOWATT218™ and ISOWATT220™ isolated versions and you can still improve your price/performance ratio. Switch to the leader in Power MOSFET isolated package technology now and from day one you'll get isolated power that will help you power right past your competition.



SGS-THOMSON Microelectronics

7, Avenue Gallieni - BP93


94253 Gentilly Cedex

Tel: (33-1) 47407575 - Fax: (33-1) 47407910

Telex: 632570 STMHQ

SGS-THOMSON


The Power to Win.

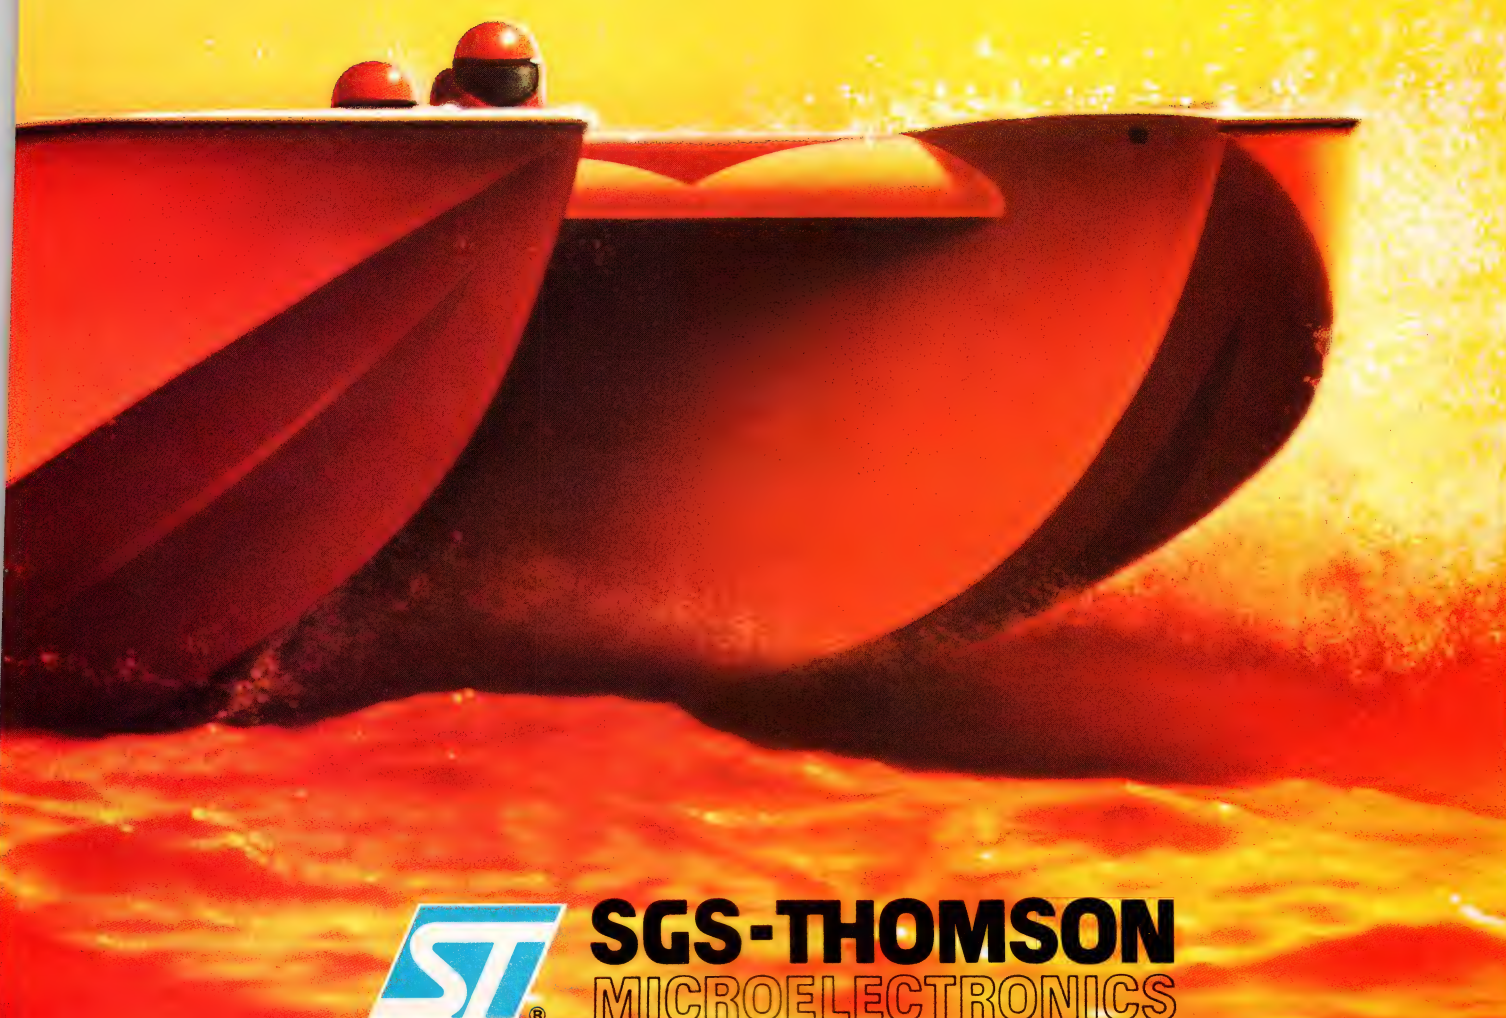

SGS-THOMSON
MICROELECTRONICS

Have it both ways.

It's the best of both approaches: the high density (512K and 1Mb) FLASH with the low power and cost-effectiveness of UVEPROMs, and the fast in-circuit reprogrammability and packaging options of EEPROMs.

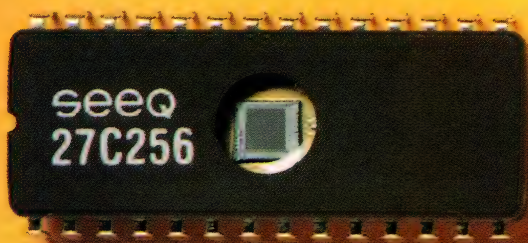

The memory density of a UVEPROM.

In a device that's priced at a fraction of the cost of EEPROMs.

It's the new FLASH EEPROM from SEEQ. And along with high density and low cost, it delivers the same kind of flexibility you need to get your design created. And implemented.

The combination of our FLASH cell architecture and EEPROM-type erasure make possible this chip's fast erase speed. The 1Mb memory array is divided into 128 sectors of 1024 bytes each. And each sector can be individually erased and reprogrammed. You can also remove the entire memory contents with chip erase. Typical erase time is 2 seconds. And write time is just 1ms per byte.

You can get our 1 Mb FLASH in ceramic and plastic surface mount packages, as well as both plastic and



The electrical erasure of an EEPROM.

seeQ
48F010 FLASH

ceramic DIPs. The DIP packages are in a 32-pin JEDEC format so you can easily upgrade in density from 512K through 2Mbit with no hardware changes.

All of which make FLASH perfect for hard disc replacement in laptop computers and portable instruments, program memory in point-of-sale terminals and industrial controllers.


So next time you look at program

memory, check out our latest FLASH. For more information just call us toll free at **1-800-3EEPROM**. Or write SEEQ Technology, Inc., 1849 Fortune Drive, San Jose, CA 95131.

You'll see that having it both ways is the best way.

seeQ
E² is our middle name.

The clear solution:

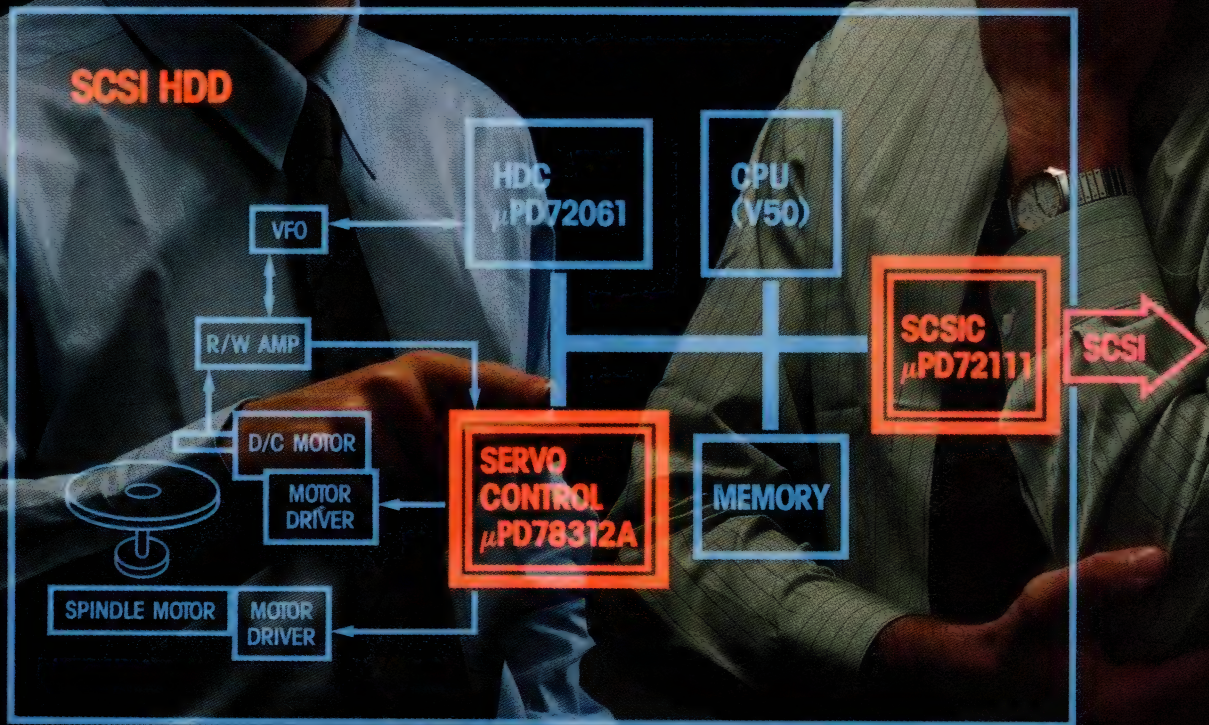

For fast answers, call us at:

USA Tel:1-800-632-3531. TWX:910-379-6985. W. Germany Tel:0211-650302. Telex:8589960. The Netherlands Tel: 040-445-845. Telex:51923. Sweden Tel:08-753-6020. Telex:13839. France Tel:1-3946-9617. Telex:699499. Italy Tel:02-6709108. Telex:315355. UK Tel:0908-691133. Telex:826791. Hong Kong Tel:3-755-9008. Telex:54561. Taiwan Tel:02-522-4192. Telex:22372. Singapore Tel:4819881. Telex:39726. Australia Tel:03-267-6355. Telex:38343.

NEC's complete chip set for high-end SCSI hard disk drives.

Want to improve the performance of your hard disk drive while reducing size, weight and power consumption? Call NEC. We'll deliver everything you need for an advanced SCSI disk drive design, including servo controller, SCSI controller, CPU and associated chips.

Responsive, singlechip servo controller.

NEC's 16-bit singlechip microcontroller excels in interrupt response. The μ PD78312A incorporates 8-level priority interrupt. It also gives you two exclusive hardware interrupt handling features that reduce software overhead.

- ☐ Macro Service provides high-speed data transfer between memory and a special function register. No software intervention required.
- ☐ Context Switching selects a new register bank for each interrupt request and eliminates the need for additional software to save current register contents.

The μ PD78312A offers all basic peripheral functions on-chip to simplify your design and minimize circuit board size.

- ☐ 2-channel, 16-bit up/down counter with quadruple counting and up/down discrimination.
- ☐ 2-channel, 16-bit timers.

- ☐ 2-channel PWM outputs, programmable for 8/10/12/16-bit resolution.
- ☐ 8-bit programmable real-time output ports.
- ☐ EPROM version available.

Versatile, high-speed SCSI controller.


Our SCSI controller gives you a competitive edge with features like high-speed sequence control. Overhead is minimized because high-level commands drive an on-chip, hard-wired sequencer.

The versatile μ PD72111 interfaces with the 8- or 16-bit data bus of any CPU. It executes high-speed asynchronous data transfer at speeds up to 5M bytes/sec. And it enhances bus utilization by providing both an 8-byte FIFO for the SCSI bus, and an 8-word FIFO for the CPU bus.


CPU with high-speed DMA controller.

As host to the SCSI controller, our chip set provides the V50™, a powerful, MS-DOS-compatible, 16-bit microprocessor. It features a high-speed, on-chip DMA controller capable of data transfer rates up to 2.5M words/sec at 10MHz.

If you want clear solutions to the challenges of hard disk drive design, call NEC. Our experts have been driving the technology for years.

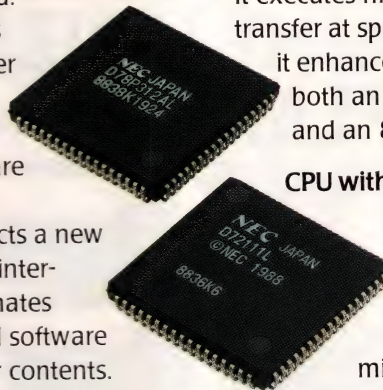

ELCO P Series Worldwide Input Power Supplies

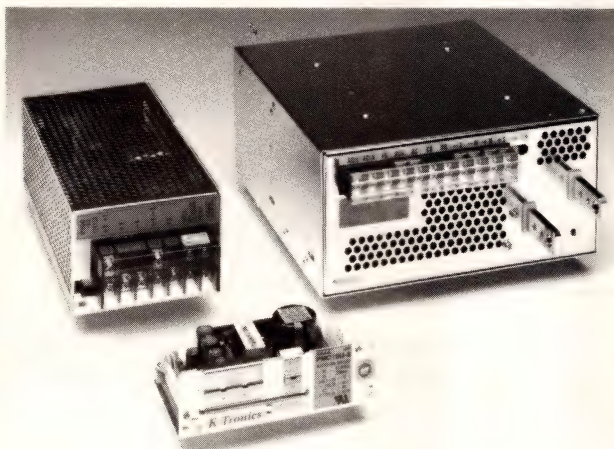

- o 15 watt to 1500 watt models, single output
- o PMC versions; multiple outputs; 15 watts up to 100 watts
- o UL, CSA & TUV approved, or pending
- o High Efficiency—up to 4.2 watts per cubic inch on P1500
- o Molex or screw terminals (most models)
- o Meets FCC & VDE EMI requirements; high MTBF
- o Smaller than industry standard footprints

For information contact:
K-Tronics, a division of K.T. Electronics.
341 Cobalt Way, #206, Sunnyvale, CA 94086
Phone 800 888-ELCO; FAX 408 732-5049

ELCO

CIRCLE NO 41

DAYLIGHT VISIBLE DISPLAYS

UP TO
1,000 FEET



Display sizes: 1½", 4", 6", 9", 12", 18" & 24"

ENERGY SAVING:

- ☐ Electromagnetic, bi-stable operation
- ☐ No bulbs to replace
- ☐ Maintenance-free
- ☐ Indication remains with power loss
- ☐ Power used only to change display
- ☐ Use indoors or outdoors
- ☐ -40°C to 75°C

IDEAL FOR:

- ☐ Instrumentation
- ☐ Industrial controls
- ☐ Timing Devices
- ☐ Toll Displays
- ☐ Metering Displays
- ☐ Production Line Displays

Call or write for full information

THE **STAVER** CO., INC.

P.O. Box H, Bay Shore, NY 11706
516-666-8000
TLX: 6711657
FAX: 516-666-8039

SIGNALEX
HIGH VISIBILITY
DISPLAYS

CIRCLE NO 42

CALENDAR

SparcIntosh (conference), San Francisco, CA. Corey Green, The Yankee Group, 200 Portland St, Boston, MA 02114. (617) 367-1000. July 25 to 26.

Supercomputers, Hypercubes and High Performance Architectures (short course), Boston, MA. John Valenti, Integrated Computer Systems, 5800 Hannum Ave, Culver City, CA 90231. (800) 421-8166; in Canada, (800) 267-7014. July 25 to 28.

Basic Integrated Circuit Technology Seminar, Sunnyvale, CA. Integrated Circuit Engineering Corp, 15022 N 75th St, Scottsdale, AZ 85260. (602) 998-9780. FAX 602-948-1925. August 15.


Data Communication Concepts (seminar), Los Angeles, CA. Technology Transfer Institute, 741 10th St, Santa Monica, CA 90402. (213) 394-8305. August 23 to 25.

11th Quartz Devices Conference and Exhibition, Kansas City, MO. Electronic Industries Association, 1722 Eye St NW, Washington, DC 20006. (202) 457-4981. August 28 to 31.

International Test Conference 1989, Washington, DC. International Test Conference, Box 264, Mt Freedom, NJ 07970. (201) 895-5260. FAX 201-895-7265. August 29 to 31.

Surface Mount '89, San Jose, CA. MG Expositions Group, 1050 Commonwealth Ave, Boston, MA 02215. (800) 223-7126; in MA, (617) 232-3976. August 29 to 31.

Real-time Structured Analysis & Design (short course), Washington, DC. John Valenti, Integrated Computer Systems, 6053 W Century Blvd, Los Angeles, CA 90045. (800) 421-8166; in CA, (213) 417-9700. FAX 213-410-2952. August 29 to September 1.

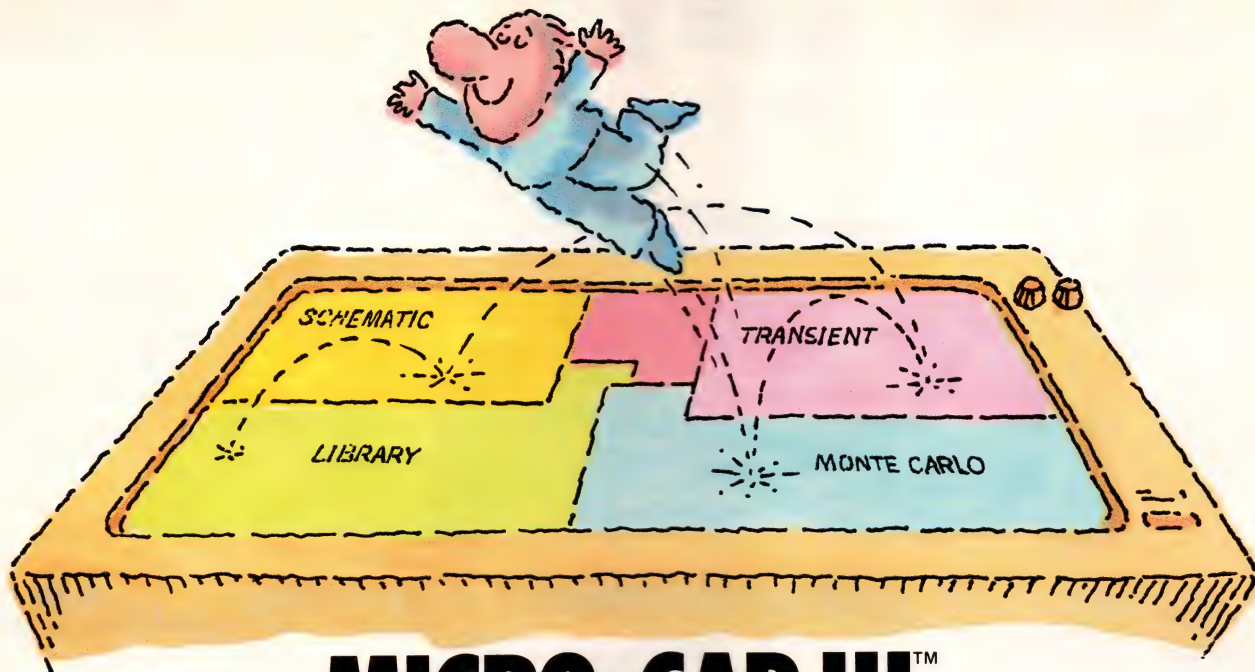


MICRO-CAP III.TM THIRD-GENERATION INTERACTIVE CIRCUIT ANALYSIS. MORE POWER. MORE SPEED. LESS WORK.


MICRO-CAP III,TM the third generation of the top selling IBM® PC-based interactive CAE tool, adds even more accuracy, speed, and simplicity to circuit design and simulation.

The program's window-based operation and schematic editor make circuit creation a breeze. And super-fast SPICE-like routines mean quick AC, DC, Fourier and transient analysis — right from schematics. You can combine simulations of digital and analog circuits via integrated switch models and macros. And, using stepped component values, rapidly generate multiple plots to fine-tune your circuits.

We've added routines for noise, impedance and conductance — even Monte Carlo routines for statistical analysis of production yield. Plus algebraic formula parsers for plotting almost any desired function.



Transient analysis



Schematic editor



Monte Carlo analysis

Modeling power leaps upward as well, to Gummel-Poon BJT and Level 3 MOS — supported, of course, by a built-in Parameter Estimation Program and extended standard parts library.

There's support for Hercules®, CGA, MCGA, EGA and VGA displays. Output for laser plotters and printers. And a lot more.

The cost? Just \$1495. Evaluation versions are only \$150.

Naturally, you'll want to call or write for a free brochure and demo disk.


spectrum

1021 S. Wolfe Road,
Sunnyvale, CA 94086
(408) 738-4387

MICRO-CAP III is a registered trademark of Spectrum Software.
Hercules is a registered trademark of Hercules Computer Technology.
IBM is a registered trademark of International Business Machines, Inc.

Team player

Make Mizar's dual-ported 68030 CPU
your multiprocessing MVP.

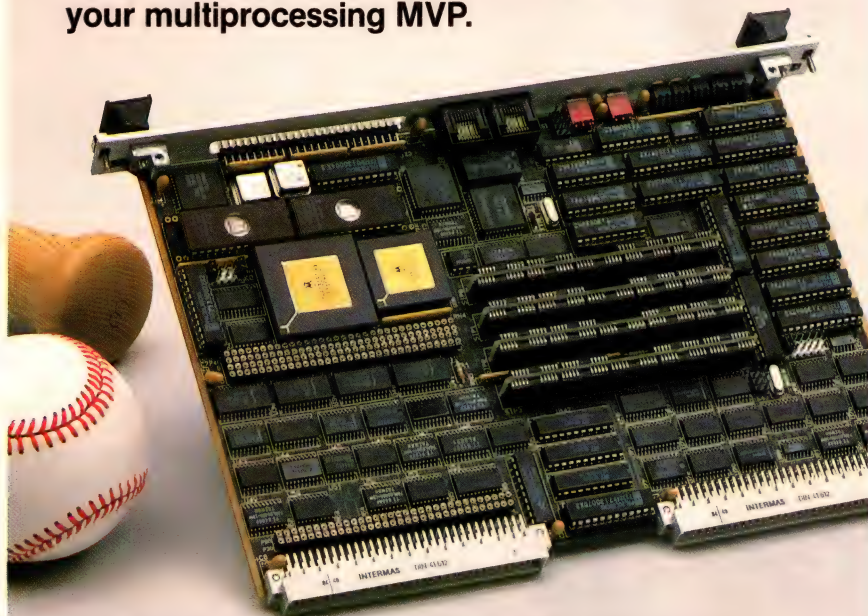

You're sure to score with Mizar's MZ 7130, the VME microcomputer with major league features. Combining 68030 power and true dual-ported memory, the MZ 7130 wins the multiprocessing pennant. All for a price that won't send you into the dugout.

Rely on the MZ 7130 for functionality: a 68030 MPU at up to 25 MHz, four MB of dual-ported DRAM with parity, 16K cache, up to one MB of EPROM, two RS-232 serial ports, SCSI, mailbox interrupts, and time-of-day clock.

Draft from options such as a 68882 FPP, up to one MB of SRAM, a VSB interface, and Ethernet™.

Build your real-time application around Mizar's team player, the MZ 7130. Call today. **1-800-635-0200**.

Mizar. The shortest distance between concept and reality.

MIZAR

1419 Dunn Drive • Carrollton, TX 75006 • (214) 446-2664

Ethernet is a trademark of Xerox Corp.

©1989, Mizar, Inc.

CIRCLE NO 43

DID YOU KNOW?

Half of all EDN's
articles are staff-written.

EDN

CALENDAR

Midcon/89, Rosemont, IL. Midcon/89, 8110 Airport Blvd, Los Angeles, CA 90045. (213) 772-2965. September 12 to 14.

Aerospace & Electronics '89 (conference), Santa Clara, CA. National Computer Graphics Association, 2722 Merrilee Dr, Suite 200, Fairfax, VA 22031. (703) 698-9600. FAX 703-560-2752. September 12 to 15.

Expo SMT International, Las Vegas, NV. Expo SMT, Box 1869, Los Gatos, CA 95031. (408) 354-0700. FAX 408-354-1036. September 25 to 27.

DISKCON, San Jose, CA. Julie Sunseri, 710 Lakeway, Suite 170, Sunnyvale, CA 94086. (408) 720-9352. FAX 408-736-2523. September 26 to 27.

IEEE International Conference on Computer Design (ICCD '89), Cambridge, MA. Giovanni De Micheli, Center for Integrated Systems, Room 129, Stanford University, Stanford, CA 94305. (415) 725-3632. October 2 to 4.

Electronic Imaging Conference East, Boston MA. MG Expositions Group, 1050 Commonwealth Ave, Boston, MA 02215. (800) 223-7126; in MA, (617) 232-3976. October 2 to 5.

20th Korea Electronics Show, Seoul, Korea. Joseph Burke, US Department of Commerce, Washington, DC 20230. (202) 377-5014. October 7 to 12.

Systems 89, Munich, West Germany. Gerald G Kallman, Kallman Associates, 5 Maple Ct, Ridgewood, NJ 07450. (201) 652-7070. FAX 201-652-3898. October 16 to 20.

***The plot that took
20 years to unfold.***



How Versatec helped change your picture of the world.

If you've got a plotting problem, chances are the company that can solve it is the one with the longest history of doing just that. That's why we'd like you to reflect on the rather long history of Versatec. Because our past might just have an impact on your future.

1969. The revolution begins.

Woodstock, miniskirts and those amazing Mets. In technology, it was a year filled with excitement. A man on the moon. The jumbo jet and Concorde. The artificial heart.

But there was another event that almost went unnoticed. One that would change forever the way engineers worked. Versatec was formed. And a little while later, we introduced the first 11-inch electrostatic plotter.

While crude by current standards, our first plotter started a revolution in engineering productivity that's still going strong today, 20 years and 50,000 systems later.

In fact, today there are more Versatec electrostatic plotters in more places throughout the world than all other brands combined.

1973. The plot widens.

Watergate hearings.
Rabies vaccine.

Supermarket scanners.

Color copiers. And a new development in engineering that would change the world—computer aided design.

Automotive, architectural, aeronautical and electrical engineers were clamoring for vastly wider plots than anything ever seen before.



Versatec responded with a whole new line of wide carriage plotters. In widths from 20 to a whopping 72 inches. Plus the ability to print on paper or vellum in clear or matte finishes. A little later we'd add 200 ppi resolution, the first RS-232 and direct CRT interfaces, first I/O multiplexer, minicomputer graphics software, universal graphics software and a few dozen other innovations.

1976. Supplies meet demand.

While R2D2, C3PO and the space shuttle were cavorting in space, Versatec announced something a little more down-to-earth. Our very own supplies research group. Dedicated to making sure that our electrographic supplies are as advanced as our plotters, these folks are now responsible for over 50 patents covering a wide range of papers, films, toners and other supplies. And our warehouses in the U.S., Canada and Europe can ship our supplies at a moment's notice.

1982. The color purple (and green and blue and yellow).

While E.T. and disk cameras were getting lots of attention, we were giving serious attention to R&D. And especially to customers who needed more dimension in their plots.

The result was the world's first electrostatic color plotter. Then we carried that technology even further with second-generation systems in 24, 36, and 44 inch formats. Followed by high resolution thermal plotters in color. And another long list of firsts, including a random element processor, plot server, color plotting software, color toners and media.

1988. Drawing some fine lines.

We shouldn't have to tell you what happened in the world last year.

But we would like to remind you of one important event in the world of plotting. We introduced the first wide format laser plotter—the Model 8836. This remarkable machine





TENT
COMPUTER MAPPING AND GRAPHICS
1015 1/2 STREET, DENVER, COLORADO 80202

does everything but cook your lunch. It plots at a sizzling one inch per second with 400 ppi resolution, in D and E sizes. Then it cuts, rolls and tapes each plot and drops it into a bin. The architects went nuts. And the CAD guys danced with joy.

There's no time like the present.

As you can tell by now, we've been listening and responding to customers for 20 years. And lately we've been hearing a lot about size, performance and cost.

So we went to work on something entirely new. And the results are truly amazing. It's called the 8500 series. A new generation of plotters with half the size, more performance and far less cost than any other electrostatic plotters ever made. Plus the greatest range of connectivity solutions and software compatibility available anywhere. These new machines have reduced plotting time from over an hour to under two minutes.

How to learn from history.


The important lesson from our long history is simple. Whenever you need a solution to almost any plotting problem, you can count on Versatec for the answer.

No other company has the experience,

range of products, technical resources and service and support. And no other company is as dedicated to its customers.

It's been that way for 20 years. And we're making sure it stays that way for the next 20.

So find out what Versatec can do for you. Call us at our toll-free number now: (800) 538-6477; in California, (800) 341-6060. And discover a whole new world of plotting solutions.

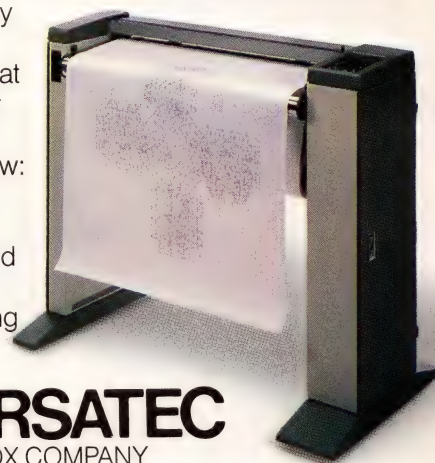

VERSATEC
A XEROX COMPANY
Engineering Systems Division

We deliver performance.

Versatec Inc.
2710 Walsh Avenue, Santa Clara, CA 95051
Xerox is a trademark of Xerox Corporation.
Map was produced on a Versatec electrostatic color plotter by TenTime, Denver, CO.
© 1989 Versatec Inc.

"What if I told you there's a 15ns 64K SRAM available"



ALABAMA, Marshall Electronics Group, (205) 881-9235, Milgray Electronics, Inc., (404) 393-9666, Reptron Electronics, (404) 446-1300, ARKANSAS, Marshall Electronics Group, (214) 233-5200, Milgray Electronics, Inc., (214) 248-1603, Sterling Electronics-Dallas, (214) 243-1600, ARIZONA, Marshall Electronics Group, (602) 496-0290, Sterling Electronics-Phoenix, (602) 268-2121, CALIFORNIA, Image Electronics, (714) 259-0900, (818) 407-8850, Marshall Electronics Group, (818) 407-0101, (714) 456-5395, (408) 942-4600, (916) 635-9700, (619) 578-9600, Merit Electronics, Inc., (408) 434-0800, Western Microtechnology, (519) 453-9430, (714) 637-0200, (408) 725-1660, (916) 707-0377, COLORADO, Marshall Electronics Group, (303) 451-8383, Sterling Electronics-Denver, (303) 792-3939, CONNECTICUT, Cronin Electronics, Inc., (203) 265-3134, Marshall Electronics Group, (203) 265-3822, Sterling Electronics-Wallingford, (203) 265-9535, DELAWARE, General Components, Inc., (609) 768-6707, Marshall Electronics Group, (301) 840-9450, Milgray/Delaware Valley, Inc., (609) 983-5010, (800) 257-7806, (800) 257-7111, Sterling Electronics-Sterling, (703) 450-2373, DISTRICT OF COLUMBIA, Marshall Electronics Group, (301) 840-9450, Milgray/Washington, Inc., (301) 621-8169, (800) 638-6656, Sterling Electronics-Sterling, (703) 450-2373, FLORIDA, Marshall Electronics Group, (813) 573-1399, (305) 977-4880, (305) 767-8585, Reptron Electronics-Tampa, (813) 855-4656, (305) 735-1112, GEORGIA, Marshall Electronics Group, (404) 923-5750, Milgray Electronics, Inc., (404) 446-8777, Reptron, (404) 446-1300, IDAHO, Marshall Electronics Group, (801) 485-1551, Western Microtechnology, (503) 629-2082, Milgray Electronics, Inc., (801) 272-4999, ILLINOIS, Goid Electronics, (312) 860-7171, Marshall Electronics Group, (312) 490-0155, (314) 291-8554, Milgray Electronics, Inc., (913) 236-8800, (312) 350-0490, INDIANA, Goid Electronics, (312) 585-3220, Marshall Electronics Group, (317) 297-0483, Milgray/Chicago, Inc., (312) 350-0490, IOWA, Marshall Electronics Group, (612) 559-2211, Milgray Electronics, Inc., (913) 236-8800, KANSAS, Marshall Electronics Group, (913) 492-3121, Milgray Electronics, Inc., (913) 236-8800, Sterling Electronics-Kansas, (913) 492-5406, KENTUCKY, Marshall Electronics Group, (513) 898-4480, Milgray/Cleveland, Inc., (216) 447-1520, (800) 321-0006, LOUISIANA, Marshall Electronics Group, (214) 233-5200, Milgray Electronics, Inc., (214) 248-1603, Sterling Electronics-Dallas, (214) 243-1600, MAINE, Cronin Electronics, Inc., (617) 449-5000, Marshall Electronics Group, (617) 658-0810, Sterling Electronics-Boston, (617) 938-6200, Western Microtechnology, (617) 273-2800, MARYLAND, Marshall Electronics Group, (301) 622-1118, Milgray/Washington, Inc., (301) 621-8169, (800) 638-6656, Sterling Electronics-Sterling, (703) 450-2373, MASSACHUSETTS, Cronin Electronics, Inc., (617) 449-5000, Marshall Electronics Group, (617) 658-0810, Sterling Electronics-Boston, (617) 938-6200, Western Microtechnology, (617) 273-2800, MICHIGAN, Calder Electronics, (616) 698-7400, Marshall Electronics Group, (313) 525-5850, Reptron Electronics, Inc., (313) 525-2700, MINNESOTA, Marshall Electronics Group, (612) 559-2211, Reptron Electronics, (612) 638-0000, Sterling Electronics, (612) 531-2666, MISSISSIPPI, Marshall Electronics Group, (205) 881-9235, Milgray Electronics, Inc., (404) 393-9666, MISSOURI, Marshall Electronics Group, (913) 492-3121, (314) 291-8554, Milgray Electronics, Inc., (913) 236-8800, Sterling Electronics-Kansas, (913) 236-5589, NEBRASKA, Marshall Electronics Group, (913) 492-3121,

now?"

"I'd say you've been reading too many supermarket tabloids."

"Seriously! You get high speed and quantity delivery, plus the ability to drastically cut your qual costs!"

"OK, I'll bite. Who's got 'em?"

"Toshiba"

"Why didn't you just say that in the first place?"

While others continue to talk speed, Toshiba now delivers 15ns Static RAMs. The exceptional access speed of the new 15ns 64K SRAM family is the result of a little technological wizardry and lots of 1.0 μ CMOS know-how. The bottom line is a 15ns 64K SRAM that dissipates less power and requires a smaller-sized die than more costly BiCMOS devices.

And, if you've been looking for ways to cut qualification costs on your 64K SRAMs, look no further than Toshiba's 64K SRAM family. By using an aluminum master slice common to all configurations within the 64K family, the cost of qualifying individual parts is reduced by as much as 75%!

Toshiba builds a full line of SRAMs that offer high speed and fully static operation. A line whose depth and breadth provides higher system performance and lower system costs when designing high-speed cache memories, high-speed main memories, high-speed buffers and writeable control stores for minis, superminis, workstations, RISC-based systems, real-time processors,

high-speed storage and high-end graphics applications.

When it comes to SRAMs, Toshiba's got all the

Toshiba High-Speed SRAMs						
Configuration	Density	Speed (ns)				Availability
64K x 1	64K	35	45	55		Now
16K x 4	64K	15	20	25	35	Now
16K x 4 (OE)	64K	15	20	25	35	Now
8K x 8	64K	15	20	25		Now
8K x 9	72K	15	20	25		Now
64K x 4	256K	20	25	35		Early '89
64K x 4 (OE)	256K	20	25	35		Early '89
32K x 8	256K	20	25	35		Early '89
32K x 9	288K	20	25	35		Early '89
16K x 12	192K module	25	35			Now
16K x 16	256K module	25	35			Now

speeds, configurations and densities you need. Including 256K, coming soon.


And plenty of packaging options, too. From JEDEC standard Skinny DIPs and SOJs to ZIP Modules.

Not to mention the kind of service and deliverability others can only talk about.

Call today for complete data sheets and applications notes at 1-800-888-0848 ext. 517.

In Touch with Tomorrow
TOSHIBA


TOSHIBA AMERICA ELECTRONIC COMPONENTS, INC.

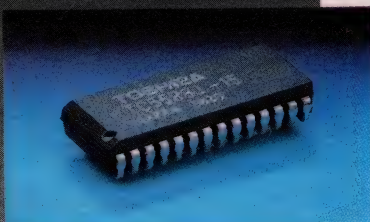

© 1989 Toshiba America, Inc.

MST-88-012

Milgray Electronics, Inc. (913) 236-8800. Sterling Electronics-Kansas. (913) 296-5589. **NEVADA**, Marshall Electronics Group. (916) 633-9700. (602) 496-0290. Sterling Electronics. (602) 268-2121. Western Microtechnology. (408) 725-1660. **NEW HAMPSHIRE**, Cronin Electronics, Inc. (617) 449-5000. Marshall Electronics Group. (617) 658-0810. Sterling Electronics-Boston. (617) 938-6200. Western Microtechnology. (617) 273-2800. **NEW JERSEY**, General Components, Inc. (609) 768-6767. Marshall Electronics Group. (201) 882-0320. (609) 234-9100. Milgray Electronics, Inc. (516) 420-9800. (609) 983-5010. (800) 257-7808. (800) 257-7111. Sterling Electronics-So. Plainfield. (201) 769-7000. **NEW MEXICO**, Marshall Electronics Group. (602) 496-0290. Sterling Electronics-Albuquerque. (505) 884-1900. **NEW YORK**, Marshall Electronics Group. (516) 273-2424. (607) 738-1611. (716) 235-7620. Milgray Electronics, Inc. (516) 420-9800. (716) 235-0830. Rume Electronics. (315) 337-5400. **NORTH CAROLINA**, Marshall Electronics Group. (919) 878-9882. Milgray Electronics, Inc. (404) 393-9666. **NORTHSOUTH CAROLINA**, Marshall Electronics Group. (919) 878-9882. Milgray Electronics, Inc. (404) 393-9666. **NORTH DAKOTA**, Marshall Electronics Group. (605) 559-2211. Repron Electronics. (605) 559-2211. **OHIO**, Marshall Electronics Group. (513) 598-4480. (216) 248-1788. (614) 891-7580. Milgray/Cleveland, Inc. (216) 447-1520. (800) 321-0006. Repron Electronics. (614) 436-6675. (216) 349-1415. **OKLAHOMA**, Marshall Electronics Group. (214) 233-5200. Milgray Electronics, Inc. (214) 248-1603. Sterling Electronics-Tulsa. (918) 663-2410. **OREGON**, Marshall Electronics Group. (503) 644-5050. Western Microtechnology. (503) 629-2082. **PENNSYLVANIA**, General Components, Inc. (609) 768-6767. Marshall Electronics Group. (609) 234-9100. (412) 963-0441. Milgray/Cleveland, Inc. (216) 447-1520. (509) 321-0006. Milgray/Delaware Valley, Inc. (609) 983-5010. (800) 257-7808. (800) 257-7111. **RHODE ISLAND**, Cronin Electronics, Inc. (617) 449-5000. Marshall Electronics Group. (617) 658-0810. Sterling Electronics-Boston. (617) 938-6200. Western Microtechnology. (617) 273-2800. **TENNESSEE**, Marshall Electronics Group. (238) 881-9235. Milgray Electronics, Inc. (404) 393-9666. Resco Raleigh. (919) 781-5700. **TEXAS**, Marshall Electronics Group. (214) 233-5200. (915) 593-0706. Marshall Electronics Group. (617) 658-0810. Sterling Electronics-Boston. (617) 938-6200. Western Microtechnology. (617) 273-2800. **VIRGINIA**, Marshall Electronics Group. (301) 840-9450. Milgray-Washington, Inc. (301) 621-8169. (800) 638-6656. Resco Raleigh. (919) 781-5700. Sterling Electronics. (703) 742-8400. (804) 226-2190. Marshall Electronics Group. (617) 658-0810. Sterling Electronics-Boston. (617) 938-6200. Western Microtechnology. (617) 273-2800. **WASHINGTON**, Marshall Electronics Group. (206) 486-5147. Western Microtechnology. (206) 881-6737. **WISCONSIN**, Gold Electronics. (312) 593-3220. Marshall Electronics Group. (414) 797-8400. Milgray/Chicago, Inc. (312) 350-0490. Repron Electronics. (612) 938-0000. **CANADA**, Marshall Electronics Group. (416) 674-2161. TTT Multicomponents. (604) 291-8866. (403) 451-4001. (403) 253-8575. (306) 933-2888. (204) 796-8401. (416) 736-1144. (613) 226-7406. (416) 857-8011. (902) 465-2350. Space Electronics Sales Corp. (514) 697-9676. (416) 636-8914. (913) 596-5340. (604) 294-1166.

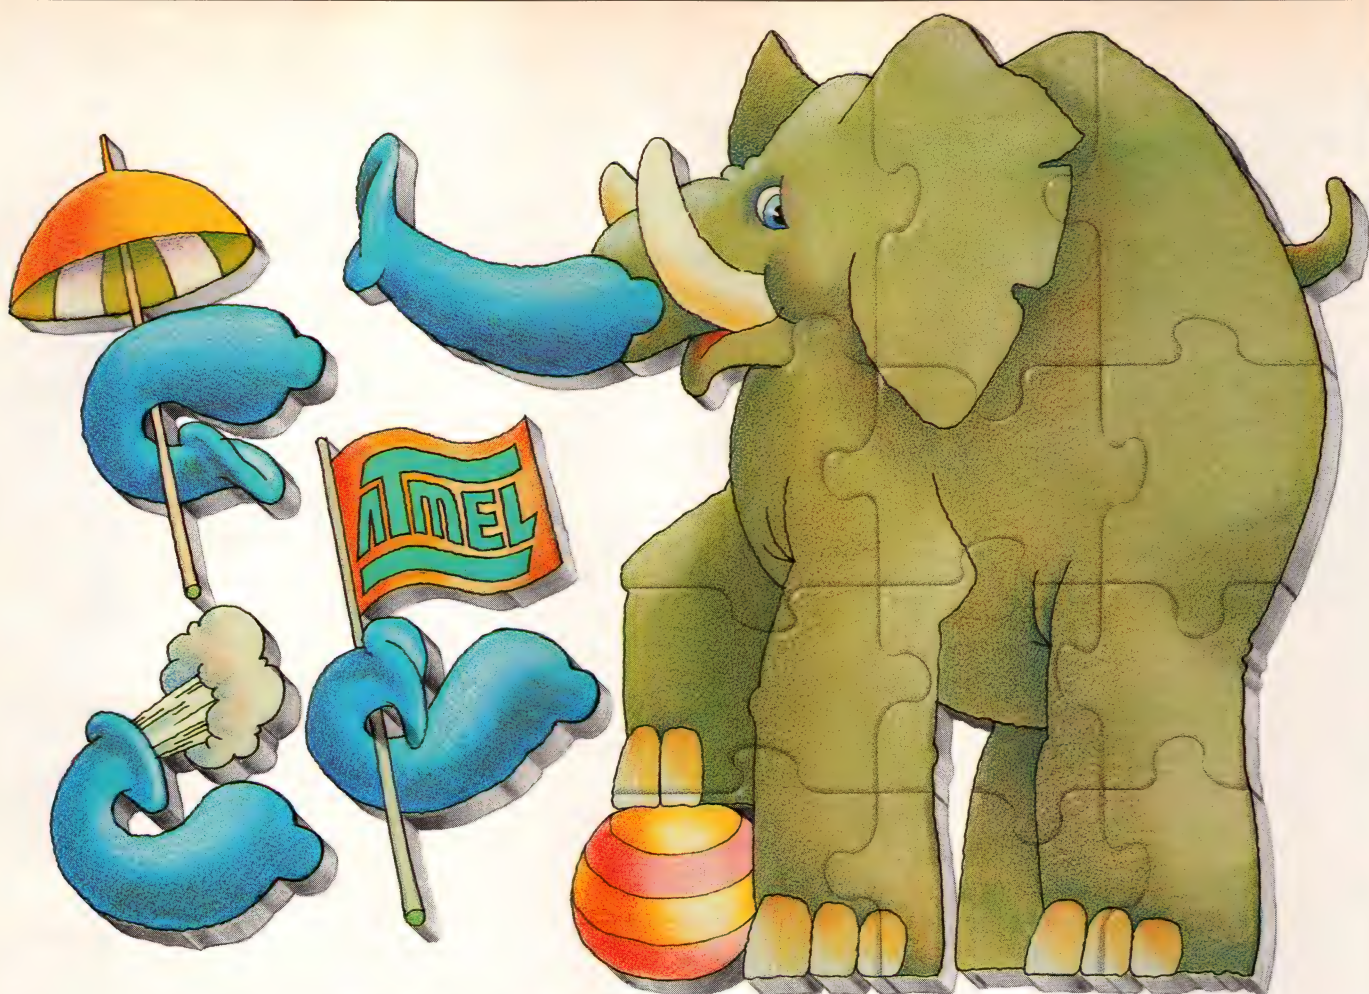

THE JUMBO REPROGRAMMABLE GATE ARRAY

Puzzled by all the logic arrays in the jungle? There's only one leader. To spot him make sure that:

- His array can really do the big jobs. It should be able to replace a whole board of old-fashioned logic.
- His array gives you a speed/power savings.
- His array is easy to use, and has a programming scheme that you're used to.

MEET THE REALLY BIG ARRAY

Atmel's ATV 2500 has up to 2500 gates. Call it JUMBO. That's about eight AT22V10s in one—enough resources for most board-sized jobs. And you can reprogram it, again, and again and again.

Atmel's Jumbo leads the herd with 30MHz operating frequency, but only needs 5mA—about one-half of what his competitors offer.

NOW THE GOOD NEWS!

You probably already know how to run this beauty. Its structured architecture is similar to what you have been working with all along, so you use your usual design methods and make only minor changes to your software and hardware.

If you write us on your letterhead, we'll send you Jumbo. And, if you have a problem with his trunk, maybe your kid will help.



ATMEL CORPORATION
2125 O'Nel Drive
San Jose, CA 95131
Tel. 408-441-0311
Fax. 408-436-4200

The people who make the difference

EDITORIAL

HDTV: Who'll watch; who'll pay?



People are talking about the high-definition-television (HDTV) market as if it exists and is already slipping away from US companies and into the hands of our consumer-electronics "enemies" in Japan. However, it will be some time before HDTV is on the market, so we should ask TV stations and consumers if they want HDTV and are willing to pay for it. The US government and the electronics industry spend time worrying about display formats, compression standards, and signal bandwidths; but if people won't pay for HDTV and won't watch it, HDTV might turn out to be a technical oddity like quadraphonic sound and AM stereo.

Today's TV audiences are much different from those of only a few years ago, and changes in viewing habits continue. In a few years, there will be fewer teenagers to watch what appeals to today's young audiences. Likewise, there is large growth among minority populations who will want TV programs that appeal to their entertainment needs. Instead of maintaining several major TV networks, population changes portend the continued fragmentation of TV audiences into narrow segments.

Already, major TV networks are feeling the effects of declining advertising revenues as advertisers spend their money elsewhere to reach specific audiences. Many TV advertisers are being attracted to the low-power VHF and UHF TV stations that cater to a local ethnic or age group. With smaller ad budgets spread among many TV stations, few of the small, low-budget stations will be able to afford an HDTV operation.

Besides stations being able to afford HDTV equipment, people must be interested enough in HDTV programs to watch them. During the 1988 Summer Olympics in South Korea, an HDTV-technology display captured viewers' attention when the program was a live broadcast. But, when the station played recorded Olympic events, viewers didn't prefer HDTV to today's standard TV. So, many viewers may shun any promise of HDTV when they face hours of reruns and today's vapid programs. The people involved with HDTV technology have forgotten that consumer needs and not technological innovations define new market opportunities.

Even if consumers do eventually show interest in HDTV, the US effort may be stillborn because of a reliance on government money and direction. Current US efforts hinge upon funds supplied by the Defense Advanced Research Projects Agency (DARPA), which will get the HDTV program underway. Many people confuse the DARPA effort with a plan to produce a consumer product. In fact, DARPA simply wants to ensure the development of high-definition displays for combat information.

With the inability to translate military developments into consumer products, the US electronics industry should be wary of government—particularly military—involvement in a consumer HDTV effort. Unfortunately, the American Electronics Association's HDTV consortium wants the US government to fund almost half of its efforts. Many in the US electronics industry think that HDTV sales will overshadow personal-computer sales, thus making HDTV a major consumer of integrated circuits and other electronic components. If that is true, the US electronics industry should be willing to invest its own money in a home-grown HDTV effort. So far, our industry seems unwilling to match the HDTV investments made by Japanese companies. Perhaps before they start collecting funds, people in the electronics industry should ask consumers whether or not they really want HDTV. If they find that consumers really want HDTV, they should then ask themselves why they didn't start investing in HDTV research years ago.



Jesse H. Neal
Editorial Achievement Awards
1987, 1981 (2), 1978 (2),
1977, 1976, 1975
American Society of
Business Press Editors Award
1988, 1983, 1981


Jon Titus
Editor

**If you believe EPLDs are
constrained by their architecture,
this should open your mind.**



Introducing MAX.

A totally new architecture that will change your thinking about EPLDs.

Still think that EPLDs can't be fast and dense?

Then prepare to erase and reprogram your thinking.

The new MAX family from Altera has a radically different EPLD architecture that can make your fastest, densest designs fly out the door in no time.

With twice the speed and three times the density of conventional EPLDs.

At the heart of the MAX architecture are Logic Array Blocks incorporating three major innovations:

First, streamlined, totally programmable macrocells with multiple control product terms.

Secondly, Logic Expanders that let you assign additional product terms to any macrocell.

Finally, decoupled I/O that lets you use all your pins and flip-flops independently.

Tying it all together, a Programmable Interconnect Array (PIA) links MAX's multiple LABs efficiently.

When you combine the MAX architecture with a high speed, 0.8 micron CMOS process, you get high density devices with extraordinary performance.

And to get those devices to market faster, there's MAX+PLUS[™]. Logic synthesis makes it the

most powerful, easy to use software ever developed for EPLDs.


That's why the MAX family is destined to become the new standard for logic design.

For more information, call Altera today:
1-800-545-3377.

And see how easy it is to change your thinking about EPLDs.



You can choose from a family of devices with a full range of densities from 16 to 128 macrocells in a variety of packaging options.

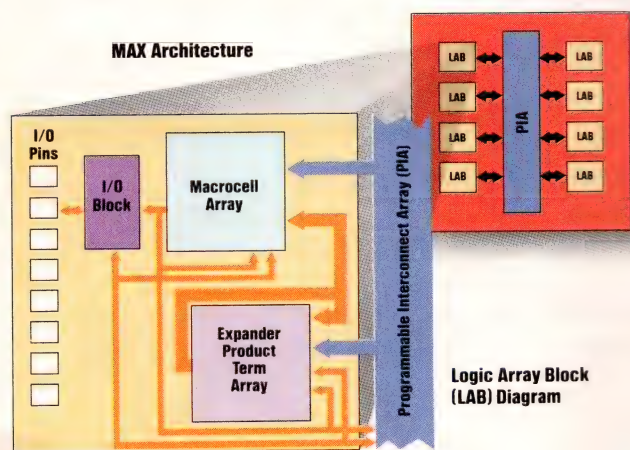

At the highest densities, MAX incorporates a Programmable Interconnect Array that gives you the high performance of small arrays with large array density.


MAX+PLUS is a trademark of Altera Corp.
©1988, Altera Corporation.

ALTERA

3525 Monroe Street, P.O. Box 58163
Santa Clara, CA 95052-8163 (408) 984-2800


SWITCHING SOLUTIONS

for your ATE

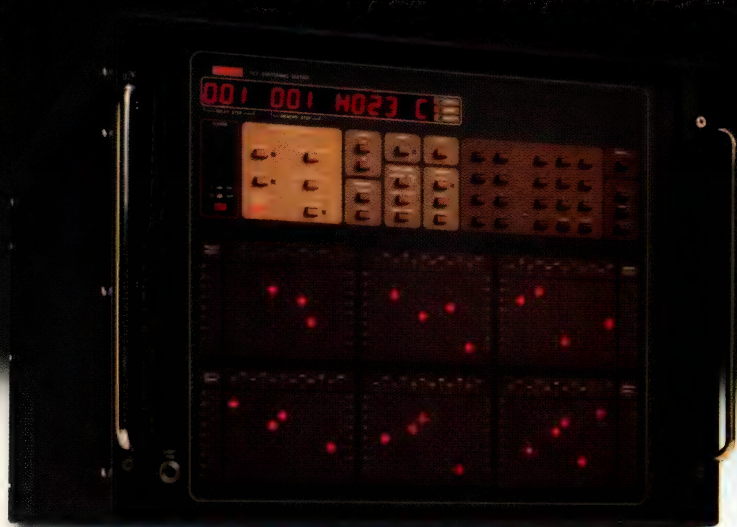

Model 707 Switching Matrix—the heart of a superior ATE system—accepts up to 6 matrix cards.

It's in the cards. Keithley's Model 707 Switching Matrix accepts a full range of interchangeable switching cards, so you can custom-design your test system for the best performance. Optimize switching characteristics to specific signals for more reliable, repeatable test results.



Connect quick. The 707's built-in analog backplane conducts signals between cards and eliminates external cabling. Control up to 2880 relays from one IEEE-488 address for signals from 5 μ V to 200 VDC, and up to 30 MHz.

Point and program. Program your test interconnect quickly and easily with the optional light pen. Use the pen to toggle any relay state, verify the setup on the display, and record up to 100 relay configurations—or transfer them to computer memory.



Call our Technical Support Hotline, (800) 552-1115, any time before 7:00 p.m. EST. Our Applications Engineers are available to help you configure your next switching system.

And be sure to ask for your free copy of Keithley's authoritative *Switching Handbook* and the *Model 707 Configuration Guide*.



**The Model 707
Switching Matrix**

KEITHLEY

EEPROM-based programmable filter handles eighth order and can be cascaded

The SC22324 CMOS programmable switched-capacitor filter allows you to implement an eighth-order filter function with a single component. The device stores the programming information in EEPROM, giving you the flexibility of a dynamically programmed device without needing to reconfigure the part at power-up. The SC22324 is also suitable for prototype development, and for production quantities you can replace it with the SC11324 custom mask version.

The device is organized as four cascaded biquad filters, any of which can be selected as the output stage. This organization allows you to use the device as a second-, fourth-, sixth-, or eighth-order filter without rewiring. You can also cascade devices to create higher-order functions. Each of the biquad sections can be a lowpass, highpass, notch, or allpass filter type with bandwidths as high as 100 kHz.

You program the filter through a 4-pin serial interface, providing 59 bits for each biquad section—4 bits for filter type and 55 bits for coefficients. The programming information loads into temporary registers. You can cause the filter to use either the contents of the temporary registers or the EEPROM simply by applying a logic signal to the Sel pin. The ability to switch between the two locations allows you to reprogram the chip without disturbing its operation. You transfer the temporary register contents to EEPROM by applying -5V to the Sel pin.

In addition to the filter sections, the device provides two op amps, an on-chip oscillator, and a programmable filter clock counter. One



The design kit for the SC22324 programmable filter includes software, a textbook, and a programming station that connects to an IBM PC.

of the two op amps is connected to the first biquad section's input; the other is undedicated. You can use these op amps for antialiasing or output-signal smoothing filters, or you can bypass them altogether. The counter generates the filter's clock from either the oscillator or an external signal. The counter's divide ratio can be stored in EEPROM.

A designer's kit is available for the SC22324. The kit comprises a programming station that connects to an IBM PC or compatible, two SC22324 devices, filter design software, and a textbook on switched-capacitor filter design. The programming station can accept two devices simultaneously, allowing you to test filters through the sixteenth order. When using the kit to program functions that are higher than the sixteenth order, the software prompts you to change devices.

The SC22324 costs \$49 (100), and the kit costs \$1875. The SC11324 custom mask version will cost about \$6 in production quantities.

—Richard A Quinnell

Sierra Semiconductor, 2075 N Capitol Ave, San Jose, CA 95132. Phone (408) 263-9300. TLX 384467. FAX 408-263-3337.

Circle No 381


SOLID STATE RELAY

Now a cheap off-the-shelf SSR that puts you in control. It lets you control the cost and the system's function in military applications.


**#2
IN A SERIES**

Here's what you get.

- Short Circuit Protection
- Status Indication
- Current Overload Protection
- Optical Isolation
- TTL & CMOS Compatible Control
- Built to meet the requirements of MIL-R-28750.
- Cost Effective



ACTUAL SIZE
CERAMIC PACKAGE

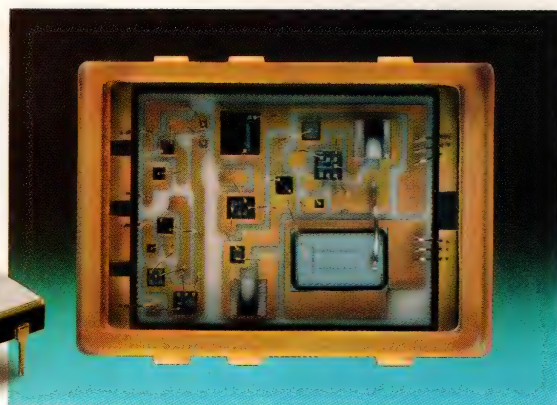


PART # CD21CDW

Review the electrical characteristics and call us for immediate application assistance.*

ELECTRICAL CHARACTERISTICS (-55°C to +105°C unless otherwise noted)				
	Min	Max	Units	
Bias Voltage (V_{BIAS})	3.8	6.0	V_{DC}	See Note 1
Bias Current (I_{BIAS})		15.0	mA	$V_{BIAS} = 5V_{DC}$
Control Voltage (V_{IN})	0	18.0	V_{DC}	
Control Current (I_{IN})		250	μA	$V_{IN} = 5V_{DC}$
Turn-Off Voltage ($V_{IN(OFF)}$)	3.2		V_{DC}	
Turn-On Voltage ($V_{IN(ON)}$)		0.3	V_{DC}	
Continuous Load Current		1.2	A	-55°C to +25°C
$I_{LOAD @ 60VDC}$		0.7	A	+85°C
Output Trip Current (I_{TRIP})	2.4 (Typ.)		A	+25°C, 100ms
On-Resistance (R_{ON})		0.65	Ohms	
Turn-On Time (T_{ON})		1.5	ms	
Turn-Off Time (T_{OFF})		0.25	ms	
Status Voltage (V_{STATUS})	1	18	V_{DC}	$V_{SAT} \leq 0.3V_{DC}$ See Note 2
Status Current (I_{STATUS})		2	mA	

Notes: 1. Series resistor is required for bias voltages above 6V_{DC}. $R_S = (V_{BIAS} - 6V_{DC})/15 \text{ mA}$
 2. A pull up resistor is required for the status output. $R_{STATUS} = (V_{STATUS} - 0.3)/I_{STATUS}$
 3. Output will drive loads connected to either terminal (sink or source).
 4. Status circuit is a built-in test feature checking the input circuitry of the relay. Status output is low (on) when the input is on.

All power FET relays may drive loads connected to either positive or negative referenced power supply lines (source or sink modes).

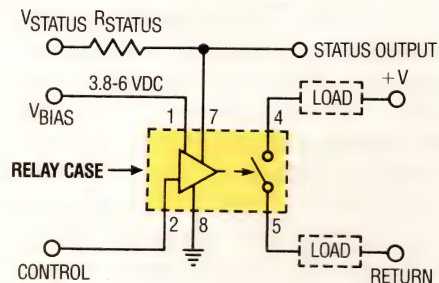

TELEDYNE SOLID STATE
A Division of Teledyne Relays

*For immediate application assistance call 1-800-284-7007.

Teledyne Solid State, 12525 Daphne Avenue, Hawthorne, California 90250.


PC-based DSP add-in card yields 33M-flops performance

An add-in card for IBM PCs and compatible computers called the Spirit-30 performs 33M flops (floating point operations per second). The board, based on the Texas Instruments' TMS320C30 digital signal processor, targets applications such as signal processing, array processing, and graphics. Software support includes a DSP library, a C compiler, a debugger, and a real-time operating system.

The TMS320C30 processor includes 8k bytes of memory and a DMA controller on chip. Furthermore, the processor executes a floating-point multiply-and-accumulate operation in a single 60-nsec instruction cycle. Key benchmarks show that the Spirit-30 board executes a 1024-point complex FFT in 3.1 msec, executes a 64th-order FIR filter algorithm in 4.67 μ sec, and multiplies 3×3 by 3×1 matrices in 0.78 μ sec.

The Spirit-30 board includes 128k bytes of 25-nsec static RAM that is dual ported between the TMS320C30 and the PC host bus. A daughter board allows you to add 512k bytes of static RAM. You can also substitute EPROM for static RAM on the board for use in stand-alone or embedded applications. The board can transfer data at 1M bytes/sec across the host bus of an 8-MHz IBM PC/AT or a compatible computer, and as fast as 2M bytes/sec over the buses of some faster PCs.

In addition to the PC host-bus interface, the accelerator board includes six expansion connectors that support external devices such as memory boards, data-acquisition boards, and graphics products. The expansion ports include a 37-pin universal host interface, a 60-pin

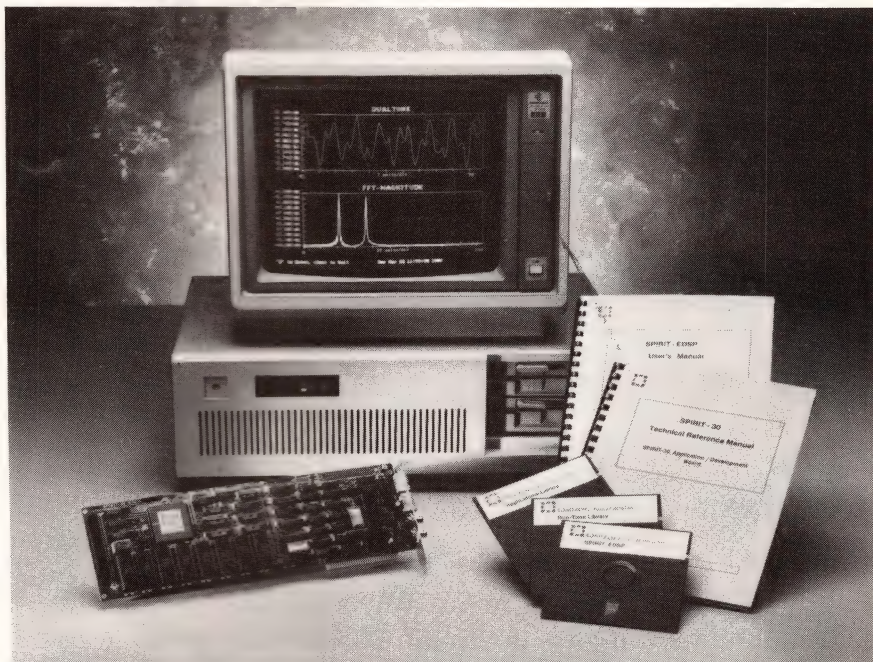

FFTs, spectrum analysis, and Viterbi decoding represent just a few of the functions you can perform using the TMS320C30-based add-in DSP accelerator card.

main-memory expansion bus, a 60-pin peripheral memory-expansion port, a 50-pin parallel I/O port, and two serial ports. You can also connect multiple Spirit-30 boards via the expansion connectors for multi-processor applications.

For software development, the company offers the menu-driven EDSP software environment that supports evaluation, debugging, simulation, and real-time DSP needs. The debug module features single-step operation, supports 16 breakpoints, provides code disassembly, and allows display and modification of memory and registers. The environment also includes a runtime library that allows the PC host to download programs, start and stop execution of the processor, and read and write blocks of memory on the DSP board.

You can also purchase the DSPL


(Digital Signal Processing Library), which provides more than 35 optimized DSP function modules developed in C. Examples of the modules' functions include spectrum analysis, cepstral analysis, Viterbi decoding, FFTs, and discrete cosine transforms. Finally, the TMS320C30 C compiler, assembler/linker/simulator, and SPOX real-time operating system can run on the board.

The Spirit-30 board costs \$2495, and the EDSP software environment adds \$495. You can purchase the DSPL for \$295, or \$985 if you need the source code.—**Maury Wright**

Sonitech International Inc, 83 Fullerbrook Rd, Wellesley, MA 02181. Phone (617) 235-6824. FAX 617-235-2531.


Circle No 378

Low Cost 8051 Tools

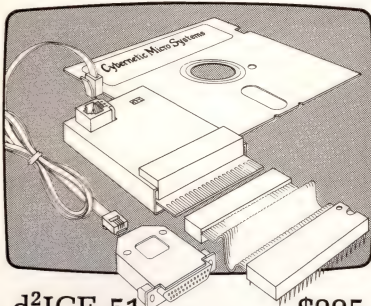


d²ICE-51 \$995

This Real-Time ICE is the lowest cost and smallest sized full speed 8051 in-circuit emulator. Full access to hardware I/O. Includes all debugging features of Sim and dICE below. Fits in shirt pocket.

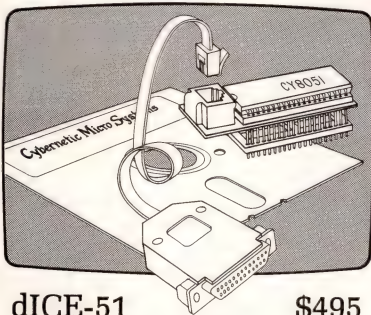

dICE-51 \$495

This reduced-speed in-circuit 8051 debugger provides full access to I/O but will not run real-time. With the same user interface features as Sim8051 below, dICE-51 generates execution profiles during reduced speed execution. (CMOS and MIL also available.)

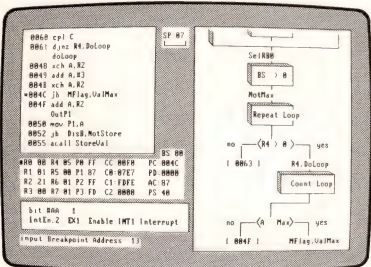

Sim8051 \$395

This software Simulator/debugger allows 'no-circuit' debugging of 8051 code on IBM-PCs. All Cybernetics 8051 debug tools offer multi-window source code displays, symbolic access to data, single key commands, breakpoints, trace, full speed and single step execution, execution profiler, and more.

Other 8051 tools include:

Cross Assembler	\$195
8751 Programmer	\$195-\$345
Debugger Demo Disk	\$ 39



Cybernetic Micro Systems
Box 3000 • San Gregorio, CA 94074
(415) 726-3000 • Telex: 910-350-5842

PRODUCT UPDATE

Driver IC lets logic signals control 400V circuits

Using the PWR-DRV1 integrated circuit, your logic circuit can control solenoids, relays, motors, or other high-voltage components. This handy IC packs a lot of capability in an 8-pin DIP.

For starters, the IC has a zener diode to create its own 5V power from either dc or rectified ac voltages as high as 120V. This feature allows you to place the driver near a load that's far from your logic and to use the load's supply voltage instead of the logic supply to drive the IC. The 5V created by the IC is available at one of the output pins, so you can supply power to additional logic.

The device has a 400V n-channel MOS power transistor that can handle as much as 275 mA of continuous current. It can also handle as much as 2A in 300-μsec pulses with a 2% duty cycle. A protection diode is connected between the drain and the device common to handle inductive switching transients. A Set-Reset latch controls the transistor, thereby allowing you to use either continuous or pulsed logic signals to turn the driver on and off. The latch responds to signals as short as 100 nsec.

Two additional features of the power driver are a current mirror to sense the load current and a comparator. The current mirror creates an output current proportional to the load current in a 1:50 ratio. You can connect a resistor between the mirror output and the device common to create a load-sense voltage as high as 200 mV.

The comparator has a 150-mV threshold with ± 50 mV of hysteresis to prevent oscillation. Its output signal can drive as much as 5 mA,



Capable of handling 275 mA at 400V, the PWR-DRV1 accepts logic-level control signals. Its many features include an onboard control latch, a load-current mirror, and a comparator.

making the comparator suitable for driving an LED as an indicator. It can also be used to drive the latch-input lines, allowing you to activate the power driver with an analog signal instead of a logic signal.

The PWR-DRV1 comes in an 8-pin plastic DIP capable of handling 750-mW power dissipation or in a 16-pin version that handles 1W. The device sells for \$3 (100).

—Richard A Quinnell

Power Integrations Inc, 411 Clyde Ave, Mountain View, CA 94043. Phone (415) 960-3572. FAX 415-940-1226.

Circle No 379

TWO REASONS TO INVEST IN SONY 6/8-BIT, 20-MHz A/D CONVERTERS.


MILD CLIMATE.

90_{mW}


power dissipation.

(70 mW, 6 bit)

REAL ESTATE.



SOP package.



DIP package.

Looking for design advantages? You'll find them throughout Sony's newly expanded 20-MHz A/D converter line.

For starters, ultra-low power dissipation helps keep your designs cool. Via our low-power ECL-3 and CMOS processes, we offer 8-bit models with 90-mW dissipation. 6-bit models with 70-mW dissipation. Plus there's our popular CXA 1096, and all-new CXA 1296—offering 100% pin compatibility and performance of TRW's TDC 1048, *yet just 25% its dissipation.*

Next, miniature packages help you meet the demand for denser designs. You'll find all-new SOP (surface mount) packaging available with nearly all models, as well as standard DIP packaging.

And if you're wondering about availability and pricing, wonder no more. Sony 20-MHz A/D converters are shipping now in large quantities. At very competitive prices.

All backed by the quality, reliability and responsive service you expect from any Sony product.

SONY'S EXPANDED 20-MHz A/D CONVERTER LINE.

MODEL	BITS	TECH- NOLOGY	POWER DISSIPATION	PACKAGE
CXD 1172P	6	CMOS	70mW	DIP
CXD 1172M	6	CMOS	70mW	SOP
CXD 1175P	8	CMOS	90mW	DIP
CXD 1175M	8	CMOS	90mW	SOP
CXA 1096P	8	BIPOLAR	350mW	DIP
CXA 1096M	8	BIPOLAR	350mW	SOP
CXA 1296P*	8	BIPOLAR	350mW	DIP

*100% pin compatible with TRW's TDC 1048.

So gain the design advantage. With one of the most complete 20-MHz A/D converter selections anywhere.

Sony's.

For more information, call (714) 229-4197 today. Or write Sony Corporation of America, Component Products Division, 10833 Valley View St., Cypress, CA 90630, Attn: Semiconductor Sales. FAX (714) 229-4271.

SONY®

Sony is a registered trademark of Sony Corporation.

STD BUS HAS



THE SOFTWARE

The low cost bus structure of choice for industrial applications, the STD Bus is not only rugged, reliable and simple to design with, it also has the best software support of the industrial busses.

Development Tools

A wide variety of development tools are available for dedicated PROM-based applications, as well as operating system implementations.

- PC to STD communication packages allowing the use of PCs for STD system development.
- Linkers and Loaders
- Prom prep packages

Device Drivers

STD manufacturers support their I/O products with device driver software that can be used with and without operating systems and can be called from many popular languages.

Operating Systems

STD Bus manufacturers offer operating systems for a variety of applications.

- Familiar Disk Operating Systems - PC DOS, MS DOS, and more.
- Real-Time Operating Systems - VRTX, AMX, MTOS, and more.
- Network Operating Systems - ViaNet, NetWare, and more.

For more information on the systems and software offered by the members of the STD Manufacturer's Group, call 312/255-3003 or circle the reader response number.

STD
The Cost Effective
Industrial Computer

PRODUCT UPDATE


TMS370 in-circuit emulator includes EEPROM programmer

For \$2995 you can buy an in-circuit emulator for Texas Instruments' TMS370 microcontroller family that will also let you program both the data EEPROM and the program EEPROM of your target device. The MR370 development kit is a 7×7.5-in. unit that lets you perform real-time emulation and debugging at clock speeds reaching 20 MHz with no wait states.

The MR370 contains 16k bytes of 120-nsec emulation overlay memory and a 68-pin PLCC (plastic leaded chip carrier) emulation plug on 8 in. of woven cable. A pop-out socket eliminates any need for specialized chip-extraction tools to remove the TMS370 from the emulator.

You don't have to provide a power supply for the MR370 because it draws its power from the target TMS370's socket. The MR370 consumes only 110 mA more current than the target device. This situation also prevents power-supply contention problems that can occur when the target device and the emulator are not powered up simultaneously. Furthermore, the unit has no hardware switches or jumpers to configure.

The MR370's software includes a TMS370 macroassembler, editor, and communications software. You can program as many as four software breakpoints and perform software tracing, as well as examine, edit, disassemble, and single-step through program memory. The unit comes with a monitor/debug command set in firmware that lets you download binary and Intel hex files, so your host computer doesn't need special driver software to communicate with this emulator. You can examine and change internal data memory, registers, and I/O ports.

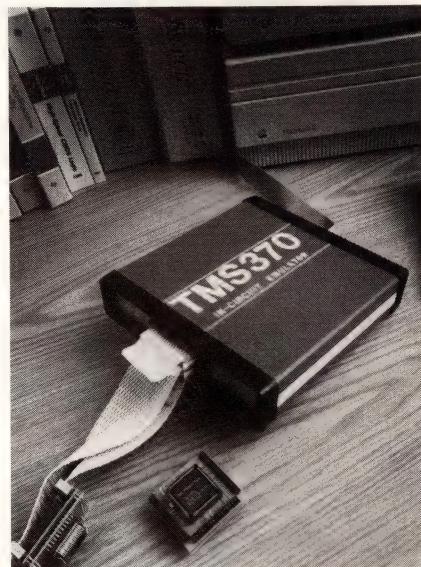

Combining an in-circuit emulator with EEPROM programming capability, the MR370 development kit from Macrochip Research lets you perform real-time TMS370 emulation and debugging at clock speeds reaching 20 MHz.

Although this unit is suitable for use with any host computer that has an RS-232C port, you can order the MR370 with software for IBM PCs or compatible computers and Macintosh computers. The standard kit works with the TMS370C050, TMS370C350, and TMS370C850 microcontrollers. Options include \$250 28-pin DIP and PLCC adapters that allow you to emulate TMS370C010, TMS370C310, and TMS370C810 microcontrollers. The company provides a 30-day money-back guarantee and a 1-year warranty.

—J D Mosley

Macrochip Research Inc, 1301 N Denton Dr, Suite 204, Carrollton, TX 75006. Phone (214) 242-0450. FAX 214-245-1005.

Circle No 380

apollo

digital™

hp HEWLETT
PACKARD

INTERGRAPH

mips



Prime

SiliconGraphics
Computer Systems

sun
microsystems

Tektronix®
COMMITTED TO EXCELLENCE



The world's finest workstations have something in common.

- Apollo
- Digital
- Hewlett Packard
- Intergraph
- Mips
- Next
- Prime
- Silicon Graphics
- Sun
- Tektronix

All these popular engineering workstations have something in common: Motorola Fast Static RAMs. And the reason that all these companies choose Motorola's Fast Statics is simple—they have what it takes to run with the best.

Remaining competitive in today's

workstation market requires reliable, high-speed Fast Static RAMs to get the most performance out of today's advanced 32-bit microprocessors. That's why Motorola is the number one choice in high-performance workstations. They offer the speed, reliability and availability necessary to excel in a tough field of competitors.

Motorola's family of Fast Statics is growing all the time; to keep up with the latest introductions, use the chart.

workstations. If you'd like more information about any of Motorola's fast statics, contact your local Motorola sales office. For published technical data, just complete and return the coupon below.




For more information.

Motorola's Fast Static RAMs are the first choice in high performance



MOTOROLA

MOTOROLA FAST STATIC RAMS AVAILABLE NOW			
ORGANIZATION	DEVICE	ACCESS TIME	PACKAGES
4K x 4	MCM6268	25, 35, 45, 55ns	PDIP
4K x 4 CS	MCM6269	25, 35ns	PDIP
4K x 4 OE	MCM6270	25, 35ns	PDIP, PSOI
16K x 4	MCM6288	20, 25, 30, 35, 45ns	PDIP
16K x 4 OE	MCM6290	20, 25, 30, 35, 45ns	PDIP, PSOI
64K x 1	MCM6287	25, 35ns	PDIP, PSOI
8K x 8	MCM6264	30, 35, 45, 55ns	PDIP, PSOI
32K x 8	MCM6206	35, 45ns	PDIP, PSOI
Cache Tag RAM Comparators			
4K x 4	MCM4180	22, 25ns	PDIP, PSOI
4K x 4	MCM62350	22, 25ns	PDIP, PSOI
4K x 4	MCM62351	22, 25ns	PDIP
Synchronous Fast Static RAMs			
16K x 4	MCM6293	20, 25ns	PDIP, PSOI
16K x 4 OE	MCM6294	20, 25ns	PDIP, PSOI
16K x 4 OE	MCM6295	25, 30ns	PDIP, PSOI
4K x 10	MCM62963	20, 25ns	PLCC
4K x 12	MCM62973	20, 25ns	PLCC
4K x 12 OE	MCM62974	20, 25ns	PLCC
4K x 12 OE	MCM62975	20, 30ns	PLCC



Write To: Motorola Ltd., European Literature Centre, 88 Tanners Drive
Blakelands, Milton Keynes MK14-5BP, United Kingdom
Please send me more information on Fast Static RAMs.

392 EDN 072089

Name _____
Title _____
Company _____
Address _____
City _____
Country _____

In-circuit emulators for μ Cs

probe software activity in a closed environment

Steven H Leibson, Regional Editor

Tricky techniques allow in-circuit emulators (ICEs) for μ Cs to peer into the inner workings of the single-chip devices, helping you to develop faster and more reliable software in a shorter period of time.

In-circuit emulators (ICEs) for μ Cs are tougher to build and select than their counterparts for μ Ps. In their nonexpanded or single-chip mode, μ Cs hide the software machinations taking place on chip, making your software more secure, but consequently much tougher to develop and debug. You cannot hang a logic analyzer on a μ C's address and data buses because those buses lack external access points. Traditional ICE techniques used for μ Ps do not work for the same reason. Consequently, an army of ICE vendors, using a variety of ingenious techniques to provide access to the μ C's inner sanctum, has geared up to serve the special needs of the μ C software developer.


Emulators for μ Ps can't cope

To understand the unique requirements of μ C emulators, you must examine the internal structure of a μ C. The μ C's core proces-

sor communicates with the IC's RAM, ROM, and I/O components over internal address and data buses. μ Cs have several operating modes, including the above-mentioned nonexpanded or single-chip mode, and an expanded mode. The operating modes determine whether or not the internal address and data buses are available on the μ C's pins. When used in expanded mode, the μ C sacrifices some or all of its I/O pins, replacing them with address and data pins so that the processor can use external ROM and RAM. In this mode, the μ C takes on the characteristics of a μ P, allowing you ready access to the data flow into and out of the processor. However, in single-chip mode, the μ C reveals little about the software it is executing, which makes in-circuit emulation, software development, and debugging difficult.

Most μ Cs can also change the operational definition of their I/O lines under program control. One μ C I/O

Illustrations by Margery Mintz
EDN July 20, 1989

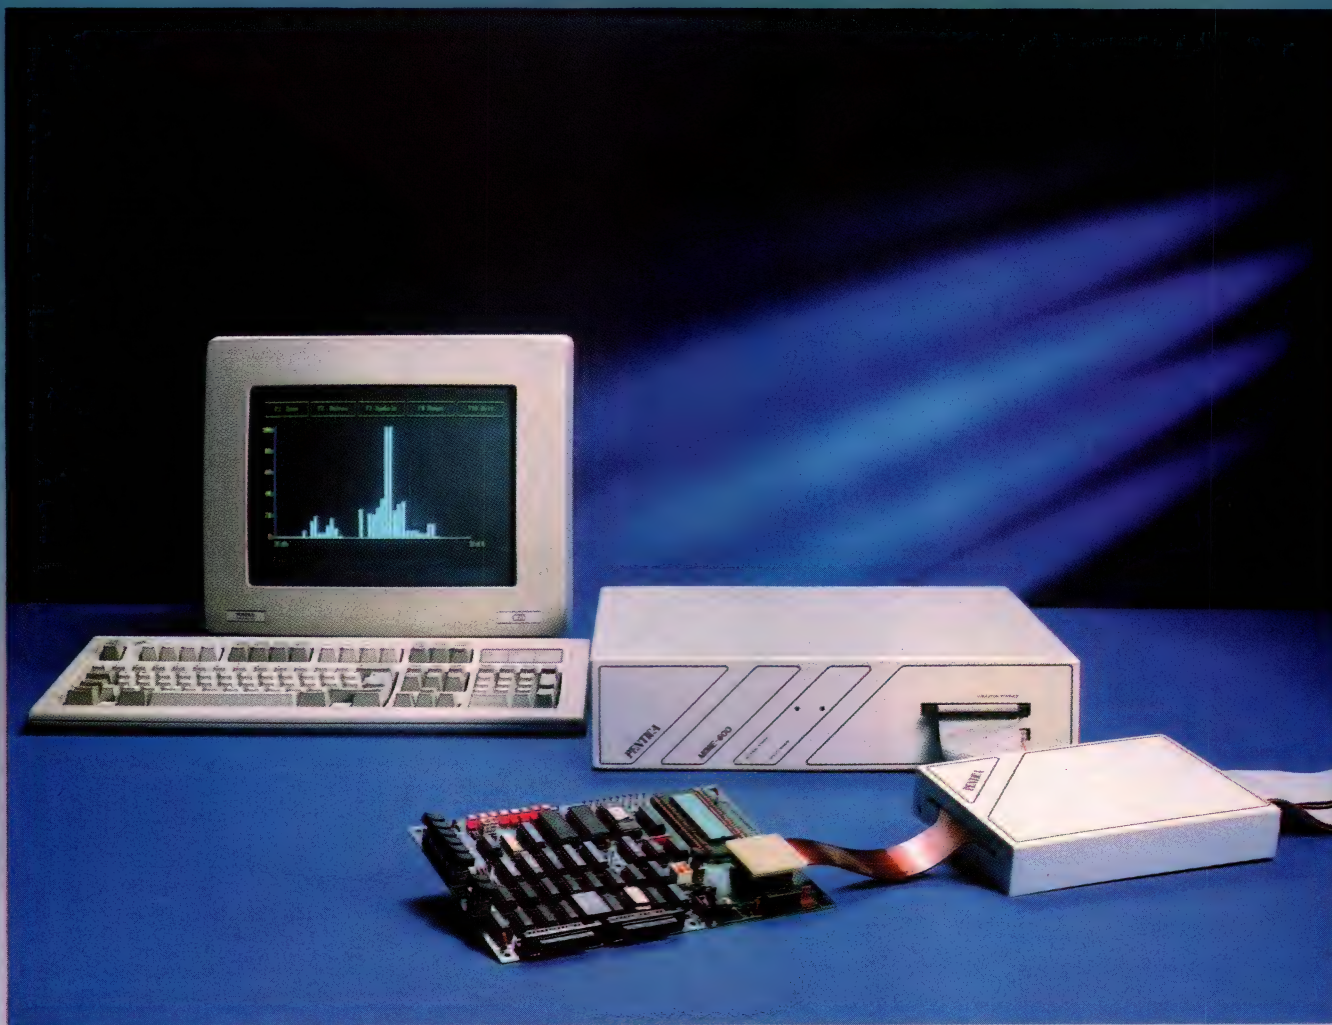

pin might be able to assume the guise of a general-purpose digital-I/O pin, an interrupt pin, an analog-I/O pin, or an address-bus or data-bus pin, depending on the software being executed. In general, μ P emulators are not designed to handle a μ C's chameleon-like I/O features.

Emulators save time and money

Generally, time-to-market considerations drive the decision to purchase an emulator in the first place. You could probably develop your μ C software simply by burning enough EPROMs (assuming an EPROM version of your chosen μ C

exists). If your code doesn't work the first time—a likely scenario—you may be in for some tough debugging sessions because most μ Cs don't incorporate any software-debugging aids. The time-honored (and time-consuming) approach to μ C software debugging requires a lot of engineering intuition: You guess what's wrong with your program and then burn another EPROM.

If you prefer to take a more direct approach to debugging by setting break points, single-stepping your code, examining registers, and manipulating the μ C's memory, you'll

In-circuit emulator for a μ C, running a software performance analysis (Pentica Systems Inc)

If an emulator helps you get your product into production weeks or months sooner, it's probably worth its weight in gold.

need some sort of debugging tool to support your efforts. Because many products that employ μ Cs as control processors lack an appropriate user interface for debugging, you must either design, build, and debug such an interface—which is not an optimal use of development time since the interface probably won't be used after the product goes into production—or use an in-circuit emulator specifically designed for the task. If an emulator can help you decrease your production time by weeks or months, it's worth its weight in gold. μ C emulators also give you the time-saving advantages of proven operation and ready availability.

A μ C ICE must be flexible enough to accommodate the variable nature of the μ C's I/O pins and capable enough to determine just what is happening inside the chip. ICE vendors use a variety of techniques, includ-


ing features developed for μ P ICEs such as trace and performance analysis, to accomplish these feats. The emulation techniques used to build a μ C emulator determine how accurate the emulation will be and how much the emulator will cost. You must decide how accurate an emulation you need and how much you are willing to spend.

Several μ C ICE products are listed in **Tables 1** through 4. Note the wide range of prices. In general, the prices correlate with the emulation accuracy of the ICE and its amount of installed emulation memory. In addition, almost all μ C emulators are based on the IBM PC or a compatible computer. Many of these emulators take advantage of advanced user interfacing techniques for PCs such as windowing, pull-down menus, and on-line help screens such as those used for



In-circuit emulator with associated emulation pods (American Automation)

Bus-based in-circuit emulator (Annapolis Micro Systems Inc)

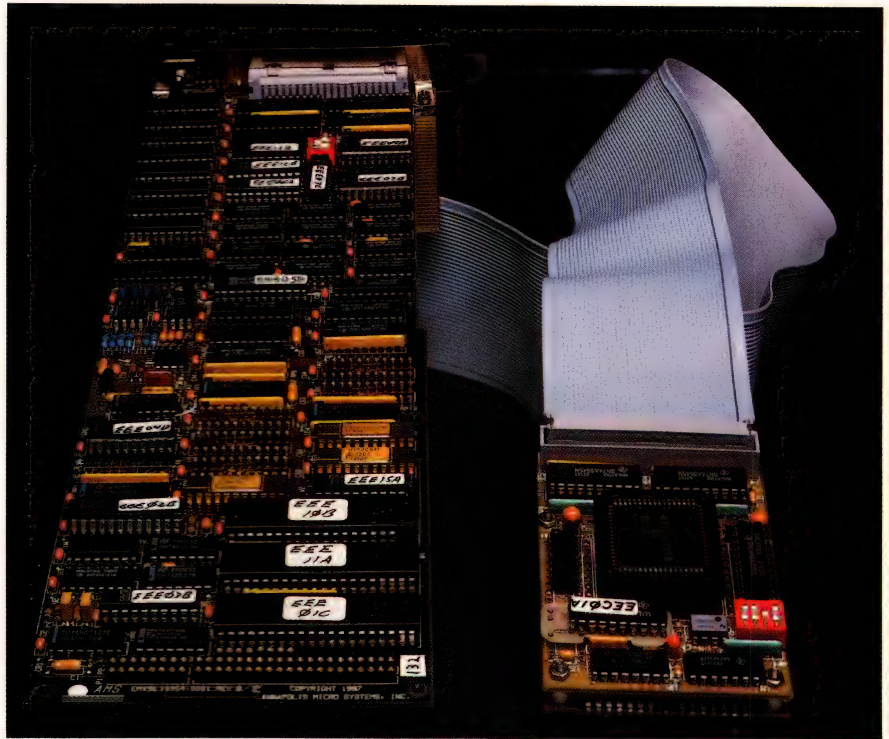

business applications. If you don't already own a PC, you'll need to add its purchase price to the cost of the emulator. Since most μ C software-development tools such as assemblers and compilers run on PCs, you probably already have one for your product.

You must balance an emulator's total cost against its limitations. Some limitations to watch out for include emulation speed, the loss of address space to the emulator's code, loss of the use of one or more interrupt vectors, loss of the use of an interrupt pin, loss of interrupt service after reaching a break point, loss of I/O ports, unsupported μ C operating modes, and unsupported μ C instructions. These limitations aren't always listed on the emulator's spec sheet, so you should ask about them before making a purchase.

Watch out for cable noise and loss

Another possible limitation that usually will not appear on the emulator's spec sheet involves the emulation cable that links the emulator to your target hardware. This cable generally must be short so that it will not degrade the I/O signals between the emulator and the target. You should also beware of grounding problems that might be caused by a high-impedance emulation cable.

Many emulator vendors provide additional ground

paths to link the emulator to the target hardware to avoid noise problems. A noisy link between emulator and target can cause problems by generating phantom bugs, which are nothing more than artifacts caused by the emulator and its cable. If the μ C you're emulating incorporates an A/D converter, grounding is even more critical because a high-impedance ground line between the emulator and the target hardware can offset A/D-converter readings and, in extreme cases, make the emulator useless as a debugging tool for your converter code.

At the low-cost end of the spectrum, software plays a major role in the emulation. The dICE-51 emulator μ C from Cybernetic Micro Systems is an excellent example of the tradeoffs that can be made between emulation accuracy and price. The dICE-51 combines the company's software-based 8051 μ C simulator and a pre-programmed 8051 μ C called a CY-8051. (For a discussion of μ C software simulators, see **box**, "Software simulation mimics hardware.") The 8051 simulation program resides in the PC and executes your 8051 μ C application code; the CY-8051 plugs into the 8051 socket in your target hardware.

When the dICE-51 simulation program executes an I/O instruction, it sends a command to the CY-8051 μ C over a serial link. The CY-8051 executes the I/O

In single-chip mode, the μ C reveals little about the software it is executing, making in-circuit emulation, software development, and debugging difficult.

commands sent by the software simulator, thus allowing the simulator to communicate with your target hardware. Because the CY-8051 allows the 8051 simulator to interact with real hardware, the accuracy of the simulation improves substantially. However, the dICE-51 software simulator running on the PC is merely interpreting the 8051 code; your 8051 software will not run in real time (full speed). In fact, the speed of your PC determines the execution speed of the simulation. The dICE-51 manual states that your software will run at 1% or less of the full 8051 speed.

Extensive use of software in the design of the dICE-51 simulation creates other limitations as well. For example, you can only use the lower 48k bytes of the 64k-byte code space supported by the 8051. In addition, the serial link between the PC and the CY-8051 con-

sumes the μ C's serial port. As a result, the CY-8051's serial I/O hardware is not available for application-related duties. Instead, the dICE-51 simulates the serial port's operation with software. These limitations are reflected in the dICE-51's relatively low price.

If you need full-speed emulation to verify your code, often a necessity for embedded-system designs, software simulation will not fill the bill. You need a more accurate emulator. Recognizing that many product developers need full-speed emulation, Cybernetic Micro Systems' d²ICE-51 uses a different, and more expensive, emulation approach to provide that capability. The d²ICE-51 employs an 8051-compatible DS5000 μ C from Dallas Semiconductor to emulate an 8051 μ C. The DS5000 μ C is a hybrid device that incorporates a processor, 32k bytes of static RAM, and a battery to

Software simulation mimics hardware

Software simulators allow you to test your μ C code on a PC-based software simulation of the μ C before the target hardware becomes available. You can use a software simulator to help you develop μ C code in several ways. The first and most obvious use of a simulator is to prove the operation of a software algorithm you're planning to use in the final product. You can also use the simulator to test alternative algorithms and determine which approach works best for a particular μ C's architecture and instruction set.

Simulators also allow you to exercise your software with a variety of stimulus data, using inputs that might not be easy to generate when working with prototype hardware. Further, if you have several programmers working on the project, software simulators can prevent the inevitable battle over who gets to use the target hardware and the in-circuit emulator. Because software simula-

tors cost less than in-circuit emulators, you may be able to provide one to each programmer and save the emulator for the final system integration or particularly nasty software bugs.

When selecting a software simulator, you should be concerned with the development tools supported by the simulator. You'll need to feed the object files generated by your cross assembler and cross compiler to the simulator, so be sure to find out what object-file formats the simulator supports. Because you can use a software simulator to single-step your code and examine your system's simulated registers and memory, you'll also want to know what symbolic formats the simulator supports.

Several vendors offer software simulators for a few μ Cs. The SimCASE-8051 (\$895) from Archimedes Software (San Francisco, CA, (415) 567-4010), the SIM 8051 (\$395) from Cybernetic Micro Systems, the 8051 SIMula-

tor (\$99) from HiTech Equipment Corp (San Diego, CA, (619-566-1892), the SIM51 (\$200) and the SIM52 (\$250) from Lear Com Co (Lakewood, CO, (303) 232-2226), and the Sim51 (\$250) from Logical Systems Corp (Syracuse, NY, (315) 478-0722) are all software simulators for Intel's 8051 μ C. In addition, Archimedes offers the SimI/O-8051 (\$495), an add-on package for the company's simulator that allows you to define complex stimulus vectors using the C programming language. Lear Com Co also offers the SIM96 (\$300); Cybernetic Micro Systems also markets the SIM 8096 (\$595) for Intel's 8096 μ C and Waferscale Integration Inc (Fremont, CA, (415) 656-5400) offers a software simulator for its PAC1000 μ C as part of the \$3595 PAC-SDT-Silver development kit. All of these products run on an IBM PC or compatible computer.

maintain the RAM's contents. Dallas Semiconductor markets a version of the d²ICE-51 for DS5000 emulation.

The d²ICE-51 software downloads your 8051 code

into the DS5000, where it is executed in real time. During single-step operation, a second μ C in the d²ICE-51 takes over the control of the I/O lines from the DS5000 and operates in a manner resembling the

**TABLE 1—REPRESENTATIVE IN-CIRCUIT EMULATORS
FOR THE EXTENDED 8051 μ C FAMILY**

MANUFACTURER	MODEL NUMBER	μ Cs SUPPORTED	EMULATION RAM (BYTES)	PC LINK	PRICE	TRACE BUFFER	TRACE BUFFER SIZE (WORDS)	COMMENTS
ADVANCED MICRO-COMPUTER SYSTEMS	PRO-32	8031, 8032, 8051, 8052, 8053	8k-64k	PC BUS	\$495-\$695	YES	1.5k	
ADVANCED MICRO SOLUTIONS	AMS 51	8051	32k	SERIAL	\$1595	NO		
AMERICAN AUTOMATION	AA572	SEE COMMENTS	64k	SERIAL	\$3950	OPTIONAL	4k	SUPPORTS 42 MEMBERS OF THE 8051 FAMILY THROUGH ADAPTERS COSTING \$2795-\$4495.
APPLIED MICROSYSTEMS	EC 7000/8051	8031, 8032, 8051, 8052	128k	SERIAL	\$3500	YES	4k	
CYBERNETIC MICRO SYSTEMS	dICE-51	8051	N/A	SERIAL	\$495	NO		SOFTWARE EMULATION.
	d ² ICE-51	8031, 8051	4k-28k	SERIAL	\$995-\$1250	NO		
HUNTSVILLE MICRO-SYSTEMS	HMI-200-8051	8031, 8032, 8051, 8052, 8053, 80C59, 80C154	128k	SERIAL	\$4995	YES	4k (2)	SUPPORTS OTHER 8051 FAMILY MEMBERS THROUGH OPTIONAL ADAPTERS.
INTEL	ICE-5100/252	8031, 8032, 8051, 8052	64k	SERIAL	\$4995	NO		
KONTRON	SE 8031	8031, 8032	48k	SERIAL	\$5095	NO		EXPANDED-MODE μ Cs ONLY.
METALINK	MC-8344	8344	32k	SERIAL	\$1895	YES	2k	
	MC-80154	8031, 8032, 80C154	32k	SERIAL	\$1895	YES	2k	
	MC-80252	8031, 8032, 80C252	32k	SERIAL	\$1895	YES	2k	
	MC-8052	8031, 8032, 8051, 8052, 8053, 80C154	32k	SERIAL	\$2895	YES	2k	
	MC-80521	8031, 8051, 8053, 80C321, 80C521	128k	SERIAL	\$3495	YES	2k	
	MI-80C451	80C451	128k	SERIAL	\$3495	YES	4k	
	MI-83C451	83C451	128k	SERIAL	\$4995	YES	4k	
	MI-80C452	80C452	128k	SERIAL	\$3695	YES	4k	
	MI-80512	80512, 80532	128k	SERIAL	\$4995	YES	4k	
	MI-80515	80515, 80535	128k	SERIAL	\$4995	YES	4k	
	MI-80532	80532	128k	SERIAL	\$3495	YES	4k	
	MI-80535	80535	128k	SERIAL	\$3495	YES	4k	
	MI-80C652	80C652	128k	SERIAL	\$3495	YES	4k	
	MI-83C751	83C751	2k	SERIAL	\$3995	YES	4k	
NOHAU	EMUL51-PC	SEE COMMENTS	32k-128k	PC BUS	\$1495-\$1915	OPTIONAL	4k-16k	SUPPORTS SEVERAL 8051 FAMILY MEMBERS WITH POD BOARDS THAT COST \$295-\$995. SUPPORTS SEVERAL 8051 FAMILY MEMBERS WITH POD BOARDS THAT COST \$295-\$595.
	EMUL31-PC	SEE COMMENTS	32k-128k	PC BUS	\$1495-\$1915	OPTIONAL	4k-16k	
ORION INSTRUMENTS	UNILAB	8051, 8052	32k-128k	SERIAL	\$3940-\$5930	YES	170-2730	SUPPORTS OTHER 8051 FAMILY MEMBERS THROUGH OTHER PPAK ADAPTERS THAT COST \$600-\$1500.
SIGNUM SYSTEMS	E232-52	8031, 8032, 8051, 8052, 80C154	64k	SERIAL	\$3795	YES	2036	
	E232-152	80C152A/B/C/D	64k	SERIAL	\$4950	YES	2036	
	E232-515/35	80512, 80515, 80535	64k	SERIAL	\$4950	YES	2036	
SOPHIA SYSTEMS	SA98-8051	8031, 8051	64k	PC BUS	\$7800	YES	2k	
ZILTEK	ICE-ENGINE	8031, 8032, 8051, 8052	64k	SERIAL	\$5095	YES	2k	INCLUDES ICE-ENGINE/ BX-8 AND ICE POD 8051.

NOTE: N/A=NOT APPLICABLE.

Bus-based emulators download code to the target system at several hundred-thousand bytes/sec; emulators that use a serial link transfer a few thousand bytes/sec.

operation of the d²ICE-51. You can set break points in your code that tell the d²ICE-51 when to switch between the DS5000 and the 8051. The break point replaces three bytes of your application code with break-point code, so you must be careful where you set break points. If you overlay an 8051 instruction that does not occupy three bytes, you may have problems when resuming program execution after the break point occurs, because the instruction following the break point has been overlayed with one or two bytes of break-point code. The d²ICE-51 manual provides suggestions for preventing this problem, but this limitation further illustrates the tradeoffs between software emulation techniques and emulation accuracy.

In addition, the DS5000 has only 32k bytes of code RAM; the emulation software uses the lowest 4k bytes, leaving only 28k bytes for your application code. Thus, you cannot use the d²ICE-51 to debug large 8051 programs. You must also move your interrupt vectors while using the emulator because the 8051's interrupt vectors are in the lower 4k-byte address space consumed by the emulator. The d²ICE-51 replaces the real interrupt vectors with a block of "pseudo" interrupt vectors starting at hexadecimal location 1000, which you use instead of the real vector addresses. These emulator limitations may or may not present major problems to your development efforts. However,

the tradeoffs Cybernetic Micro Systems made in creating the d²ICE-51, which were made possible by the DS5000, are reflected in the price of the emulator.

The DS5000-8051 μ C relationship is unique. Most emulator vendors rely on bond-out chips for emulating μ Cs. A bond-out chip is based on the corresponding μ C, but the semiconductor manufacturer makes the processor's address and data buses available on additional pins. Because these bond-out chips require high-pin-count packages and are low-volume products, they cost much more than the corresponding μ Cs. This additional cost drives up the price of the emulator. Occasionally, the ICE vendor can find a version of the μ C that is designed to accept a piggybacked EPROM. These piggyback devices work like the bond-out parts but cost much less, allowing the ICE vendor to charge less for the emulator.


With a bond-out or piggyback part used for the emulation, ICE vendors can apply the full range of μ P emulation techniques to μ Cs. The emulator can run at full speed because the code is running on a real μ C, not a software simulation. I/O transactions take place at full speed during the emulation because the bond-out and piggyback devices do not sacrifice I/O pins to make the address and data buses accessible. Yet the prices of emulators based on piggyback and bond-out parts still vary substantially, based on the product-design


TABLE 2—REPRESENTATIVE IN-CIRCUIT EMULATORS FOR THE 68HC11 μ C FAMILY

MANUFACTURER	MODEL NUMBER	μ Cs SUPPORTED	EMULATION RAM (BYTES)	PC LINK	PRICE	TRACE BUFFER	TRACE BUFFER SIZE (WORDS)	COMMENTS
AMERICAN AUTOMATION	AA572-68HC11	68HC11A2/A8	64k	SERIAL	\$8445	OPTIONAL	4k	INCLUDES AA547 DEVELOPMENT STATION.
APPLIED MICROSYSTEMS	EC7000/68HC11	68HC11	64k	SERIAL	\$9600	YES	1k	
HUNTSVILLE MICROSYSTEMS	HMI-200-68HC11	68HC11	64k	SERIAL	\$4995	YES	4k (2)	68HC11F1 SUPPORTED BY A \$395 ADAPTER.
KONTRON	KSC 6811	68HC11	64k	SERIAL	\$9195	OPTIONAL	16k	
ORION INSTRUMENTS	UNILAB	68HC11	32k-128k	SERIAL	\$3540-\$5530	YES	170-2730	
PENTICA SYSTEMS	MIME-600	68HC11	64k	SERIAL	\$9353	YES	8k	
SOPHIA SYSTEMS	SA98-68HC11	68HC11	64k	PC BUS	\$7800	YES	2k	
ZILTEK	ICE-ENGINE	68HC11	64k	SERIAL	\$6295	YES	2k	INCLUDES ICE-ENGINE/BX-8 AND ICE POD 68HC11.


The image shows the front panel of the Orion Instruments UniLab 8620. On the left is a black power switch with a red indicator light. To its right is the Orion Instruments logo. The central label reads "UniLab 8620". Below this, there are two horizontal slots: the left one is labeled "8/16 BIT IN-CIRCUIT EMULATOR" and the right one is labeled "48 CHANNEL BUS STATE ANALYZER". On the far right, there is a label "EPROM PROGRAMMER" above a small black module.

with new UniLab 8620 analyzer-emulator.

- program's key functions as they are performed.
- 
- A photograph of an IBM PC system. It includes a CRT monitor displaying a blue screen with white text, a beige system unit with a floppy disk drive, a keyboard, and a mouse. A small external device, possibly a modem, is connected to the system unit via a cable.

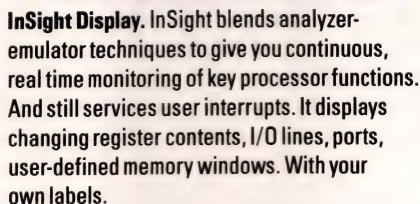

■ Ease of use, another Orion trademark, is also built in. So you have all the familiar features and formats you're used to working with. It doesn't matter if your project is a single chip controller or complex 16-bit



702 Marshall St., Redwood City, CA 94063
TLX 530942 FAX 415/361-8970
Computer Integrated Instrumentation

Some emulators have performance analysis options that use the trace buffer to identify code bottlenecks.

approach taken by the ICE vendor, the amount of emulation memory built into the emulator, the speed of that emulation memory, and the trace features of the product. Once again, you must decide which features you will need and which you can't afford.

Bus-based emulators download faster

You can divide μ C ICE product design approaches into two fundamental philosophies: bus-based and serial. Though all of the emulators listed in the tables rely on a PC (a few work with other host computers as well), some emulators are designed to plug into the PC's expansion bus and some are designed as separate units that communicate with the PC over a serial link. Card-based emulators that plug directly into the PC's bus generally cost less than the emulators that communicate serially with the PC because you don't pay for an additional case or power supply. Furthermore, bus-based emulators can download code to the target hardware at several hundred thousand bytes/sec, while emulators that use the relatively slow serial link are limited to a few thousand bytes/sec. That serial link can become a very real and irritating bottleneck for downloading large programs, especially when you are in the throes of debugging.

However, bus-based emulators force you to keep


your target hardware near your PC. The PC bus' signal-speed limitations and the μ C's I/O signals restrict emulation cables to a few feet at best. The separately packaged, serially linked emulators allow you to put the emulator close to the target hardware while keeping the PC (and you) separated from the target by a safe distance. This feature may be important if you are developing code for large, μ C-controlled mechanical products such as industrial robots or jet engines. In addition, you can easily move an externally packaged emulator from one PC to another or even use a switch to connect two PCs to one emulator. If you want to move a bus-based ICE, you'll have to open your PC to extract the emulator board (or boards).

Another differentiating factor among μ C emulators is the emulation memory and its corresponding cost. Some vendors offer their emulators with the maximum amount of emulation memory that can be addressed by the emulated μ C. Other vendors choose to lower the price of their entry-level products by putting some fraction of the maximum possible emulation memory in the emulator and offering memory expansion kits as an option. If you aren't planning to write large application programs, you can save money by purchasing an emulator with less emulation memory; however, you should remember to account for any differences

TABLE 3—REPRESENTATIVE IN-CIRCUIT EMULATORS FOR THE 8096 μ C FAMILY

MANUFACTURER	MODEL NUMBER	μ Cs SUPPORTED	EMULATION RAM (BYTES)	PC LINK	PRICE	TRACE BUFFER	TRACE BUFFER SIZE (WORDS)	COMMENTS
AMERICAN AUTOMATION	AA572-8096	8096, 8097, 8096BH, 8097BH	64k	SERIAL	\$8945	OPTIONAL	4k	INCLUDES AA547 DEVELOPMENT STATION.
	AA572-80196	80196	64k	SERIAL	\$8945	OPTIONAL	4k	INCLUDES AA547 DEVELOPMENT STATION.
ANNAPOLIS MICRO SYSTEMS	EMX96TV	8096, 80196, 80C196	64k	PC BUS	\$3130	NO		
HEWLETT-PACKARD	64771A	80C196-KA	64k	SERIAL	\$13,450	YES	1k	
HUNTSVILLE MICROSYSTEMS	HMI-200-8096	8095BH, 8096BH, 8097BH, 8098, 80196, 80197	64k	SERIAL	\$4995	YES	4k (2)	
INTEL	ICE-196KB/HX	8XC196KB	128k	SERIAL	\$13,500	YES	2k	
	ICE-196KB/MX	8XC196KB	64k	SERIAL	\$10,500	YES	2k	
	ICE-196KB/PC	80C196KB	64k	PC BUS	\$3000	YES	2k	
	VLSICE-96P	8096 FAMILY	64k	SERIAL	\$8995	YES	4k	
ORION INSTRUMENTS	UNILAB	8096BH, 8097BH, 80C196	32k-128k	SERIAL	\$3840-\$5830	YES	170-2730	

The Analog ASIC Solution

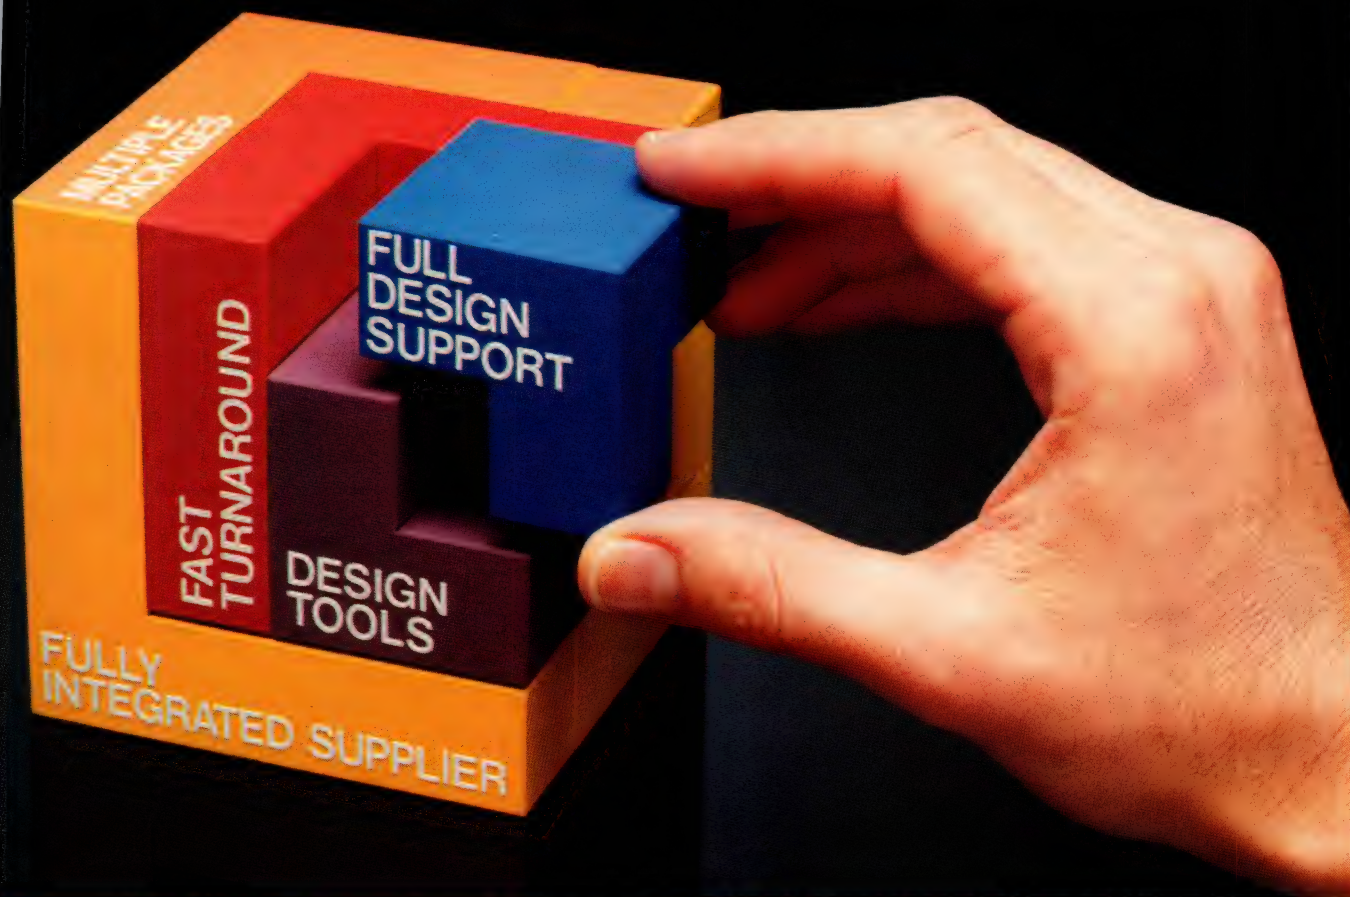

All the pieces—from Raytheon, your development partner:

Raytheon's RLA Linear Array Family of user-configurable macrocell arrays—and full design support. (RLA 40, 80, 120, and 160)

☐ **Configurable macrocells:** 4, 8, 12 or 15 gain blocks that can be configured into a variety of analog functions to achieve your system's needs.

☐ **Design support:** Raytheon offers a comprehensive design kit containing applications and design documentation, 200X plots, a printed circuit board, and 23 macrocell kit parts.

Software includes SPICE¹ model data files that can run on PCs and various workstations.

Application engineers provide personalized service and full support from design conception through product delivery. Take advantage of Raytheon's extensive experience in custom and semicustom products.

☐ **And more:** Choose from a wide variety of packages including plastic and ceramic DIPs, SOICs, PLCCs, and LCCs in commercial, industrial and military temperature ranges.

Analog ASICs need not be a puzzle. Not with Raytheon's RLA Family. And the support we provide with more than 15 years' experience as a supplier of high-volume commercial custom and semicustom devices.

Call us for complete RLA program information and details on the RLA Macrocell Array Design Kit.

Raytheon Company
Semiconductor Division
350 Ellis Street
Mountain View, CA 94039-7016
(415) 966-7716

Raytheon

Where quality starts with fundamentals.

¹ SPICE developed by University of California

Some in-circuit emulators cannot run at the full speed of the μ Cs they emulate.

in emulation-memory size when comparing emulator prices. In addition, you should also compare the speed of the emulator's emulation memory. That memory-speed rating helps determine the emulator's maximum emulation speed. Some in-circuit emulators cannot run at the full speed of the μ Cs they emulate, a problem that becomes more acute as semiconductor vendors introduce faster versions of existing μ Cs.

Trace buffers capture critical events

In addition to emulation memory, many μ C emulators also incorporate various amounts of trace-buffer memory and a trace analyzer to capture the execution states of your program. Some μ C ICE vendors incorpo-

rate a trace analyzer into their products as a standard feature; some vendors offer trace analyzers as optional equipment; and still others simply don't offer a trace analyzer at all. A trace analyzer resembles a general-purpose logic-state analyzer, but different emulators use the trace memory for different purposes.

Some trace analyzers store only the state of the address and data buses in each trace-memory word. Other emulators also store the state of the μ C's I/O lines, the states of general-purpose inputs, and the time that the trace word was stored. Storing an instruction's execution time helps you calculate the duration of your code's critical sections, which, in real-time applications, can help you avoid cycle counting by hand.

TABLE 4—REPRESENTATIVE IN-CIRCUIT EMULATORS FOR ASSORTED μ Cs

MANUFACTURER	MODEL NUMBER	μ Cs SUPPORTED	EMULATION RAM (BYTES)	PC LINK	PRICE	TRACE BUFFER	TRACE BUFFER SIZE (WORDS)	COMMENTS
AMERICAN AUTOMATION	AA547	SEE COMMENTS	64k	SERIAL	\$3950	OPTIONAL	4k	THE AA547 SUPPORTS SEVERAL μ Cs USING ADAPTERS THAT COST \$2495-\$6500.
HEWLETT-PACKARD	64735A	647180	126k	SERIAL	\$12,040	YES	1k	
	64786A	32020	128k	SERIAL	\$13,550	YES	1k	
	64787A	320C25	128k	SERIAL	\$14,200	YES	1k	
MACROCHIP RESEARCH	320C10/15	320C10, 320C15	8k	SERIAL	\$1795	NO		WORKS WITH IBM PC, APPLE MACINTOSH, OR DEC VAX COMPUTERS. WORKS WITH IBM PC, APPLE MACINTOSH, OR DEC VAX COMPUTERS. WORKS WITH IBM PC, APPLE MACINTOSH, OR DEC VAX COMPUTERS. WORKS WITH IBM PC, APPLE MACINTOSH, OR DEC VAX COMPUTERS.
	320C14	320C14	8k	SERIAL	\$2495	NO		
	320C25	320C25	32k	SERIAL	\$2495	NO		
	TMS370	TMS370 FAMILY	16k	SERIAL	\$2995	NO		
NATIONAL SEMICONDUCTOR	MOLE	COP400 FAMILY	2k	SERIAL	\$3760	YES	256	INCLUDES ASSEMBLER. INCLUDES ASSEMBLER. ASSEMBLER (\$495) AND C COMPILER (\$790).
	MOLE	COP800 FAMILY	16k	SERIAL	\$4995	YES	2000	
	MOLE	HPC FAMILY	16k	SERIAL	\$4930	YES	2000	
ORION INSTRUMENTS	UNILAB	SEE COMMENTS	32k-128k	SERIAL	\$2990-\$4980	YES	170-2730	THE UNILAB SUPPORTS A LARGE NUMBER OF μ Cs WITH OPTIONAL PPAK ADAPTERS THAT COST \$600-\$1500.
SIGNUM SYSTEMS	E232-DSP17	320C17, 320E17	16k	SERIAL	\$6900	YES	32k	
	E232-S8	SUPER8	128k	SERIAL	\$5200	YES	32k	
SOFTAID	647180X	647180	80k	SERIAL	\$5995	YES	1k	
SOPHIA SYSTEMS	SA98-6301	6301, 6303	64k	PC BUS	\$7800	YES	2k	
	SA98-6305	6305	64k	PC BUS	\$9300	YES	2k	
	SA98-7807/09	7807, 7808, 7809	64k	PC BUS	\$7800	YES	2k	
	SA98-7810/11	7810, 7811	64k	PC BUS	\$7800	YES	2k	
	SA98-78310/312	78310, 78312	64k	PC BUS	\$8300	YES	2k	
	SA98-SUPER8	SUPER8 FAMILY	64k	PC BUS	\$9300	YES	2k	
	SA98-Z8	Z8 FAMILY	64k	PC BUS	\$9300	YES	2k	
TEXAS INSTRUMENTS	XDS/22	TMS370 FAMILY	64k	SERIAL	\$8250	YES	2k	
THORSON ENGINEERING	MICROAID/HCO5	68HC05	8k	SERIAL	\$2100	YES	2k	
ZAX	ERX	6301	128k	PC BUS	\$5995	YES	4k	
	ERX	6801	128k	PC BUS	\$5995	YES	4k	
ZILTEK	ICE ENGINE	6301	64k	SERIAL	\$5595	YES	2k	INCLUDES ICE-ENGINE/ BX-8 AND ICE POD 6301.

Pack A Punch With Vitelic's Integrated Cache RAMs.



Double The Punch of Your High-performance 32-bit PCs and Technical Workstations.

INTEGRATED CACHE RAMs			
Part No.	V63C328	V63C308	V63C64
Organization	8K x 16 Cache	4K x 16 Cache	8K x 8 Fast SRAM
Controller Interface	Intel 82385	CHIPS® 82C307, 82C327	All
Speed	20, 25, 33 MHz	16, 20, 25 MHz	16, 20, 25, 33 MHz
Associativity	Direct map or 2-way	2-way	Direct map, 2-way or 4-way
Size	Your choice of 16K, 32K, 64K, 128K bytes		

A Lean, Mean Memory Machine.

Drop our cache RAM in with a cache controller for a complete cache subsystem. No more glue logic. No more matching address access times with CPU clock speeds. And, best of all, two chips replace twenty-six chips for a complete 32K byte cache subsystem.

Our integrated cache RAM frees up as much as 9 in² of valuable board space, which decreases costs associated with reliability, manufacturing and inventory. Plain and simple, this means lower costs and higher profits for you.

Our automatic power down circuitry reduces power consumption by 65%—ideal for portable applications.

Cache and DRAMs—The Winning Combination.

Team up our cache RAMs with our DRAMs for a knock-out combination. Vitelic's smart, lightning-fast DRAMs have earned us the reputation as a worldwide leader in 70-80ns DRAMs—we ship more than 1.5 million units per month.

CMOS—The Technology of Champions.

Vitelc's advanced CMOS process offers the triple threat of high speed, low power and high density. Vitelic's CMOS technology, coupled with innovative designs from our world-class design team, make for breakthrough cache and DRAM memory solutions.

Call us today at (800) 344-5970 or write:
Vitelc Corporation, 3910 North First Street, San Jose, CA 95134-1501 to find out how our cache RAMs and DRAMs can give your PCs and workstations the high-performance punch that will send the competition down for the count.

 **VITELIC**
The Emerging Leader
in Specialty Memories

Imagine a μ C-based controller running an internal-combustion engine at 3000 rpm and suddenly halting the processor when the emulator hits a break point.


In addition, some emulators have performance-analysis options that use the trace buffer to help you identify code bottlenecks.

You should consider how trace information is stored in addition to what is stored in an emulator's trace buffer. Emulator trace analyzers employ triggers that resemble those built into general-purpose logic-state analyzers. Again, you will find a wide variation in the ability to define the trigger conditions ranging from a single, simple trigger word to complex, multilevel trigger sequences with loop counters and a filtered display of the captured information. If you are purchasing a μ C emulator to shorten your product-development time, you will want to carefully evaluate the utility of complex-trigger capabilities available with some emulators. If your software is intricate and you suspect that some particularly nasty bugs might crawl into your code, a complex-trigger capability in an emulator's trace analyzer might save you from paging through several thousand lines of code to find the elusive critters.

A key reason to buy an emulator with a trace analyzer is to prevent the emulation from halting when the emulator reaches a break point. Not all development projects need this feature; but if you are using a μ C to control some ongoing physical process, you may not want the emulation to stop and leave the process without processor control. Imagine a μ C-based controller running an internal-combustion engine at 3000 rpm and suddenly halting the processor when the emulator hits a break point. The result would probably be quite spectacular. Emulators that lack trace buffers halt and switch to single-step mode when they reach a break point. Because the trace analyzer is monitoring, rather than controlling, the emulation, it can halt when a trigger occurs without halting the emulation.

Don't make assumptions about trace analysis

However, the incorporation of a trace buffer into an emulator does not guarantee that the emulator won't halt when a break point is reached. For example, Intel's ICE-196KB/HX and ICE-196KB/MX emulators both have 2k-word trace buffers; the higher-priced HX model allows you to view the trace buffer without stopping the emulation; the MX model does not. The HX version also incorporates additional trace-related features such as an event timer, conditional trace capability, and a "fastbreak" facility that provides you with access to program-variable values while the emulation is running. Therefore, don't assume that a trace buffer

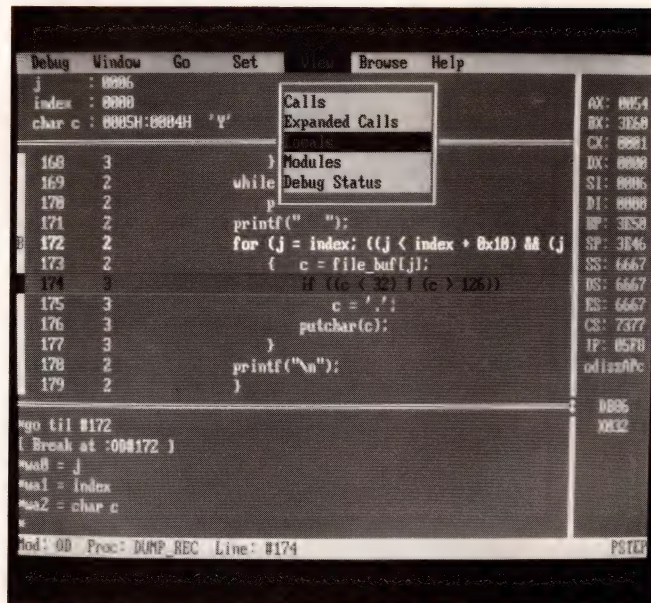

Windowed debugging screen with pull-down menus (Intel Corp)

ensures that the emulation will continue automatically after a break point is reached. If the emulator's data sheet doesn't explicitly state the relationship between the emulator and the trace analyzer, ask the vendor for more specific information.

Debugging based on trace analysis and break-point activities allows you to examine the registers and memory of the μ C. When μ C programs were small and all coding was done in assembly language, it was possible (though not particularly convenient) to use the absolute hexadecimal addresses of your program variables during the debugging process. Now that embedded programs have become large enough to bump into the typical μ C's 64k-code ceiling and are coded in high-level languages such as C, symbolic debugging using variable names instead of absolute addresses is either required or at least very desirable.

Most μ C ICE vendors provide symbolic debugging capabilities for at least some assemblers and compilers available for the emulated μ C. Some emulators allow you to single-step your program with either assembly-language or high-level-language line granularity. If you already have a specific cross assembler or cross compiler, you'll want to find out if the μ C ICE vendor supports the software development products you're using. Some μ C emulator vendors, such as American Automation and Intel, offer their own assemblers and compilers, so you can be fairly confident that the software tools and emulator from the same vendor will

Z I L O G



Designing with 40-pin Z8 parts just got a whole lot easier.

Introducing the Z86E21,[™] Zilog's CMOS one-time programmable microcontroller for the entire Z8 family. It's the form, fit and function part you need for all Z8 designs and short production runs.

Zilog is Superintegration.[™]

As the demand for higher levels of integration grows, the need for a new approach to ASICs arises. That new approach is Superintegration from Zilog. Through Superintegration, Zilog has developed a rapidly growing family of application specific standard products (ASSPs), also known as cell-based integrated circuits (CBICs[™]), which are working cores and cells that have been combined and enhanced for specific applications. They are not custom parts. In fact, the ASSPs and CBICs we develop use the same architecture and the same codes you're already working with.

ASSPs and CBICs mean a lot less risk than ASICs. NRE charges are eliminated. Board real estate is significantly reduced. And on-silicon coupling enhances overall performance. Think what that can mean to your design efficiency, your costs and your time-to-market.

The compatibility.

The Z8 OTP plugs right into your final production board. It fits with all 40-pin parts, whether they're NMOS or CMOS. And you can get the package you need. An 8K OTP ROM in a 40-pin DIP or 44-pin PLCC package.

The functions.

Use the Z8 OTP however it best suits your situation. It lets you write, debug or verify code. It gives you perfect fit, form and function. And it lets you avoid having to resort to a design proto-pack, with its required external EPROM, for short-run production applications.

The performance.

You get everything you'd expect from a Z8 OTP. 256 bytes of RAM, for one thing. An 8K OTP PROM, for another. Then there's the full duplex UART and the 32 I/O lines. And the ability to address 112K bytes of external memory. Plus all the overall performance advantages of CMOS and Superintegration.[™]

The reliability.

The Z8 OTP comes to you with Zilog's proven quality and reliability built in. Off the shelf. At a highly competitive price. Find out more about the Z8 OTP, or any of Zilog's growing family of Superintegration products. Contact your local Zilog sales office or your authorized distributor today. Zilog, Inc., 210 Hacienda Ave., Campbell, CA 95008, (408) 370-8000.

Right product. Right price. Right away.  **ZiLOG**

ZILOG SALES OFFICES: CA (408) 370-8120, (714) 838-7800, (818) 707-2160, CO (303) 494-2905, FL (813) 585-2533, GA (404) 923-8500, IL (312) 517-8080, MA (617) 273-4222, MN (612) 831-7611, NJ (201) 288-3737, OH (216) 447-1480, PA (215) 653-0230, TX (214) 987-9987, CANADA Toronto (416) 673-0634, ENGLAND Maidenhead (44) (628) 39200, W. GERMANY Munich (49) (89) 612-6046, JAPAN Tokyo (81) (3) 587-0528, HONG KONG Kowloon (852) (3) 723-8979, TAIWAN (886) (2) 741-3125, SINGAPORE 65-235 7155. DISTRIBUTORS: U.S. Anthem Electric, Bell Indus., Hall-Mark Elec., JAN Devices, Inc., Lionex Corp., Schweber Elec., Western Microtech. CANADA Future Elec., SEMAD. LATIN AMERICA Argentina—Tel. (1) 46-2211, Brazil—Digibyte (011) 241-3611, Mexico—Semiconductores Profesionales (5) 536-1312.

Don't assume that a trace buffer ensures that the emulation will continue automatically after a break point is reached.

work together smoothly. Most emulator data sheets mention something about the product's software compatibility.

Data-sheet specifications can help you narrow your emulator selections to a few good candidates, but many of the issues and pitfalls you'll encounter when using μ C emulators don't appear on the spec sheets. It's always safer to ask about an emulator's limitations than to assume the answers to your questions. If you make the right choice, a μ C in-circuit emulator is bound

to save you precious time during software development and system integration. The wrong choice may cost you more time, in terms of debugging emulator-induced problems, than you gained by using the in-circuit emulator in the first place. **EDN**

Article Interest Quotient (Circle One)
High 488 Medium 489 Low 490

For more information . . .

For more information on the μ C emulators described in this article, circle the appropriate numbers on the Information Retrieval Service card or use EDN's Express Request service. When you contact any of the following manufacturers directly, please let them know you saw their products in EDN.

Advanced Micro Solutions
1033 S Imperial Dr
Hartland, WI 53029
(414) 367-3577
Circle No 396

Advanced Microcomputer Systems Inc
1321 NW 65th Pl
Ft Lauderdale, FL 33309
(305) 975-9515
FAX 305-975-9698
Circle No 397

American Automation
2651 Dow Ave
Tustin, CA 92680
(714) 731-1661
FAX 714-731-6344
Circle No 398

Annapolis Micro Systems
612 Third St, Suite 301
Annapolis, MD 21403
(301) 269-8096
Circle No 399

Applied Microsystems Corp
Box 97002
Redmond, WA 98073
(206) 882-2000
FAX 206-883-3049
TLX 185196
Circle No 400

Cybernetic Micro Systems
Box 3000
San Gregorio, CA 94074
(415) 726-3000
TWX 910-350-5842
Circle No 401

Dallas Semiconductor
4350 Beltwood Pkwy S
Dallas, TX 75244
(214) 450-0400
Circle No 402

Hewlett-Packard Co
Box 10301
Palo Alto, CA 94303
Phone local office
Circle No 403

Huntsville Microsystems Inc
Box 12415
Huntsville, AL 35802
(205) 881-6005
FAX 205-882-6701
TWX 510-600-8258
Circle No 404

Intel Corp
3065 Bowers Ave
Santa Clara, CA 95051
(408) 765-8080
Circle No 405

Kontron Electronics
1230 Charleston Rd
Mountain View, CA 94039
(415) 965-7020
FAX 415-965-3505
TWX 910-378-5207
Circle No 406

Macrochip Research Inc
1301 N Denton Dr, Suite 204
Carrollton, TX 75006
(214) 446-9906
Circle No 407

Metalink Corp
33 W Boxelder Pl, Suite 110
Chandler, AZ 85224
(602) 926-0797
TLX 4998050
Circle No 408

National Semiconductor Corp
Box 58090
Santa Clara, CA 95052
(408) 721-5000
TLX 346353
TWX 910-339-9240
Circle No 409

Nohau Corp
51 E Campbell Ave
Campbell, CA 95008
(408) 866-1820
FAX 408-378-7869
Circle No 410

Orion Instruments Inc
702 Marshall St
Redwood City, CA 94063
(415) 361-8883
FAX 415-361-8970
TLX 530942
Circle No 411

Pentica Systems Inc
One Kendall Sq, Suite 2200
Cambridge, MA 02139
(617) 494-1253
FAX 617-577-1209
Circle No 412

Signum Systems
1820 14th St
Santa Monica, CA 90404
(213) 450-6096
TLX 362439
Circle No 413

Softaid Inc
8930 Route 108
Columbia, MD 21045
(301) 964-8455
FAX 301-596-1852
TWX 640-265-2092
Circle No 414

Sophia Systems
3337 Kifer Rd
Santa Clara, CA 95051
(408) 733-1571
Circle No 415

Texas Instruments Semiconductor Group
Box 809066
Dallas, TX 75380
(800) 232-3200 X700
Circle No 416



Thorson Engineering
6225 76th St SE
Snohomish, WA 98290
(206) 334-4214
Circle No 417

Zax Corp
2572 White Rd
Irvine, CA 92714
(714) 474-1170
FAX 714-474-0159
TLX 183829
Circle No 418

Ziltek Corp
1651 E Edinger Ave
Santa Clara, CA 92705
(714) 541-2931
FAX 714-541-2933
Circle No 419

THE OPEN WORLD OF THEMIS COMPUTING

**A full spectrum of
VMEbus products**



Support for a world of applications.

THEMIS Real-Time Open Systems provide solutions that put you in control of the application, from innovative single slot processing systems to robotics and vision. Our graphics and vision products help you keep an "eye" on the process, our communications and industrial I/O products keep you informed and the process under control.

For information, call Themis Computer
Americas and Pacific Rim:

(415) 734-0870, FAX (415) 734-0873

Europe:

(331) 69.86.15.25, FAX 64.46.45.50



A World Player in VME

Tango. Now More Than Ever, The Best Value in PCB Design.



Take a look at the all new Tango Series II. Our pop-up menu interface sets a new standard for ease-of-use and productivity. Lay out simple prototypes or complex, multi-layer, SMT designs with over 100 new features including user-definable tracks, pads, and grids.

For IBM-PCs and compatibles, Tango-PCB Series II, just \$595. Tango-Route Series II autorouter, just \$495. Both include one year's updates, free tech support, 30-day money-back guarantee.

Call today.




**FREE
EVALUATION
PACKAGE**

800-433-7801 619-695-2000

ACCEL Technologies

7358 Trade St., San Diego, CA 92121

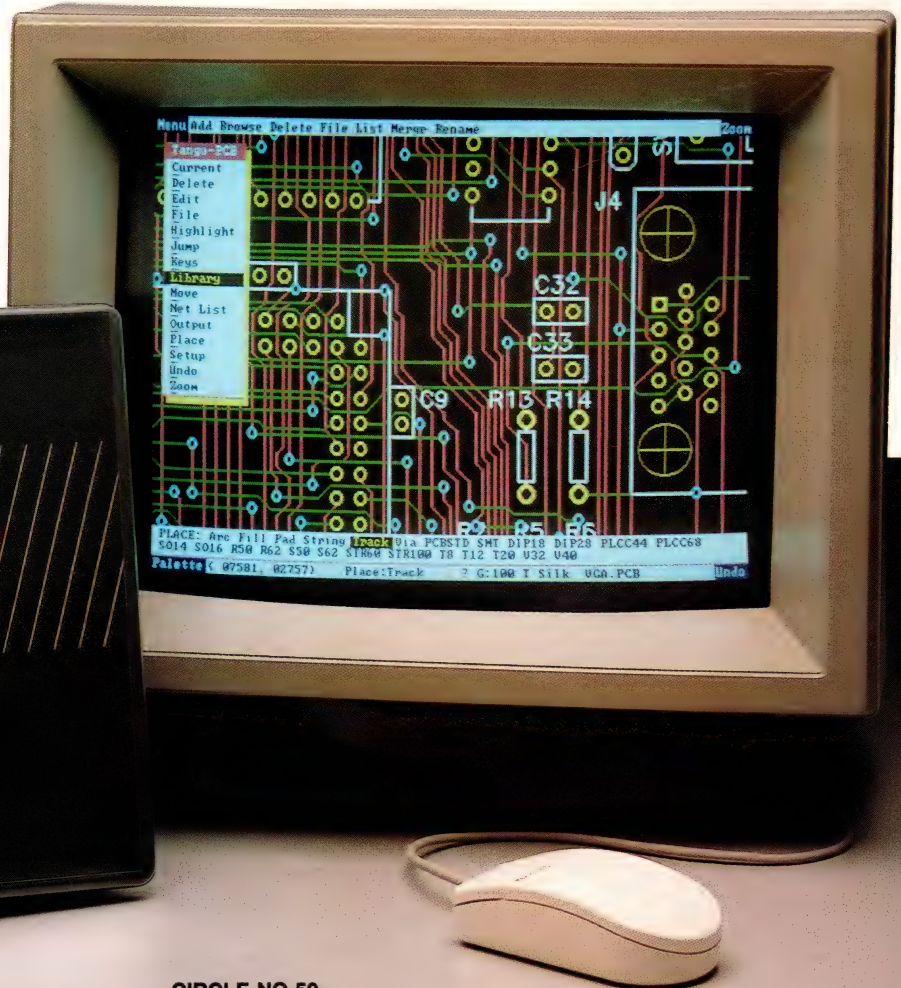

NOW FROM NMB TECHNOLOGIES

BOXER™ AXIAL MOTOR FANS



*The
Marks of
Excellence™*

FOR LOW NOISE AND LONG LIFE

Quiet. That's the first thing you notice about Boxer cooling fans. They're so quiet you can scarcely hear them. But they do the job they're designed for. Efficiently. Reliably. And they go on doing it. Without problems. Year after year after year. They're ideal for microcomputers, printers, facsimile machines and such equipment.

Now you can get the full line of Boxer low noise axial cooling fans from NMB Technologies. AC and DC fans. More than 100 models. All popular sizes and capacities from 9 to 215 CFM. Some with speed sensors. Approved by UL, CSA, and VDE.

Progress at NMB never stops. We saw a market need, so we've just introduced a new

N/L series of 12V and 24V DC fans with even lower noise levels. 28 models are available, with noise levels as low as 20dBA. Now, that's quiet!

Boxer fans owe their reliable quality to the NMB commitment to vertical integration. All

components are made in-house, including the precision bearings, so we can keep tight quality control. And our own automated, high-volume production capabilities make them extremely price competitive.

Boxer. One of the industry's true Marks of Excellence for superior performance and customer satisfaction.

Now from NMB Technologies. Call or write today for our new brochure.



NMB || NMB TECHNOLOGIES
INCORPORATED

Boxer Fan Division

9730 Independence Avenue • Chatsworth, CA 91311
Telephone: 818.341.3355 • FAX: 818.341.8207 • TLX: 651340

FULL SPE



For the name of your nearest distributor in Europe, call 44-296-625462. Or contact Applied Microsystems Corporation Ltd., Chiltern Court, High Street, Wendover, Aylesbury, Bucks HP22 6EP, United Kingdom. In Japan, call 03-493-0770. Or contact Applied Microsystems Japan Ltd., Nihon Seimei, Nishi-Gotanda Building, 7-24-5 Nishi-Gotanda, Shinagawa-KU, Tokyo T141, Japan.

AMC 240

ED AHEAD.

INTRODUCING THE FIRST 33-60 MHz MICROPROCESSOR EMULATOR FOR THE 68020 AND 68030.

Put your phone in front of you and get ready. You're about to get in touch with the future of high speed microprocessor emulation.

For quite some time Applied Microsystems has been designing a radical new concept in 32-bit development. Now it's ready. The EL 3200.

It's capable of not only matching current speeds, but can efficiently expand to support faster speeds and advanced 32-bit microprocessors of the future.

The news is not just speed, but how the EL 3200 gets up to speed.

It runs at full target clock speed—33 MHz for 68020 and 68030. It fully supports 68030 cache burst and synchronous bus cycles. And, since it sits as a node right on the trunk of your Ethernet network, the EL 3200 can be accessed from any workstation.

The EL 3200 offers your choice of source level or symbolic debugging. Whether you want to work in Assembly or C, we can provide the software tools for your exact needs.

The sophisticated breakpoint system has hundreds of real-time access breakpoints, six real-time execution breakpoints and unlimited software execution breakpoints. As an option, you can have up 2MB of no wait state overlay memory that runs at full clock speed, so there are no restrictions on memory, software or interrupts. The 16K deep by 139 bit wide trace provides true 32 bit support.

Seeing is believing. For a demonstration or more information, pick up your phone.

Dial full speed ahead and ask for Telemarketing. In WA (206) 882-2000.

Applied Microsystems Corporation, P.O. Box 97002, Redmond, Washington, USA 98073-9702.

1-800-343-3659




Applied Microsystems Corporation

DOS + QuickBASIC or C + Instrumentation Code Generation = ?


There's only one solution...

LabWindows®

*time-saving, easy-to-use program development tools
for instrumentation control and data acquisition and analysis*




VXI



RS-232



GPIB



Plug-in Boards



Are you using a DOS-based personal computer for controlling instrumentation? Do you want the best available software tools for acquiring and analyzing data using standard DOS programming languages? If your answer to these questions is yes, LabWindows is just the solution you're looking for. The unique LabWindows function panel interface lets you interactively control your instrumentation hardware and collect data, as well as automatically generate Microsoft® C or QuickBASIC program code for your application.

With LabWindows you can control GPIB, RS-232, or VXI instruments, or plug-in data acquisition cards for PS/2 and PC-AT computers. For standalone instrument users, the LabWindows instrument library has over 50 ready-to-use instrument drivers so you can program your instrument using intuitive instrument-specific function panels, without knowing the instrument inside-out.

Because acquiring data is only one element of your application, LabWindows has a complete set of QuickBASIC and C compatible libraries for data analysis, presentation, and storage. Manipulate arrays, create a histogram, or use the optional Advanced Analysis Library to perform operations such as Fast Fourier Transforms, digital filtering, and curve

fitting. Give your programs a big performance boost using the specially optimized LabWindows analysis routines for computers with an 80387 numeric coprocessor. For your data presentation and storage needs, use the LabWindows Graphics Library to create multiplot graphs, bar charts, or scatter plots, and use the Data Formatting Library for data logging and file operations.

If you're looking for the right tools to take maximum advantage of your DOS computer using QuickBASIC or C for data acquisition and analysis, there is only one solution...LabWindows. Call National Instruments at (800) IEEE-488 to speak with a sales or applications engineer about how LabWindows can help you.

Ask for a *FREE* Catalog


**NATIONAL
INSTRUMENTS®**
The Software is the Instrument™
12109 Technology Blvd.
Austin, Texas 78727-6204
(512) 794-0100

NATIONAL INSTRUMENTS OF JAPAN (03) 788-1922 •
NATIONAL INSTRUMENTS OF FRANCE (1) 486 53370 •
NATIONAL INSTRUMENTS UNITED KINGDOM (06) 355-23545 •
ARGENTINA (1) 46-5776 • AUSTRALIA (2) 736-2888 • BELGIUM (2) 466-8199 • CANADA
(416) 890-2010, (613) 596-9300, (514) 747-7878, (403) 295-0822, (604) 988-2195 • CHILE (2) 225
3689 • DENMARK (2) 251-122 • FINLAND (0) 372 144 • GREECE (1) 361-1283 • HONG
KONG (2) 0426-2707 • IRELAND (846) 661414, (3) 427-2282 • ISRAEL (3) 324 298 • ITALY
(2) 984-91071-2-3 • KOREA (2) 776-5340 • MEXICO (5) 660-4323 • THE NETHERLANDS (7)
099-6360 • NEW ZEALAND (9) 444-2645 • NORWAY (2) 53-1250 • PORTUGAL (1) 545-313 •
SINGAPORE (65) 336-4713 • SOUTH AFRICA (011) 787-0473 • SPAIN (1) 455-8112 •
SWEDEN (8) 792-1100 • SWITZERLAND (6) 552-8949 • TAIWAN/THE REPUBLIC OF
CHINA (02) 703-6280 • THAILAND (2) 234-9330 • WEST GERMANY (89) 80-7081

In-circuit ASIC verification tool checks designs before prototypes

The Rapid Prototype Machine (RPM) Emulation System is a real-time, in-circuit, ASIC verification tool based on Xilinx's Logic Cell Array (LCA). You can design a circuit implementation, transfer the design to the RPM hardware, plug the RPM emulator into your target system, and prove that the logic works in concert with the target system. If it doesn't work, the emulation system lets you reconfigure the LCAs to debug and correct problems.

The basic RPM configuration supports real-time emulation of designs with as many as 25,000 gates. Modular expansion permits the gate capacity to grow to 100,000 gates. Stimulus generation and logic analysis are built into the basic con-

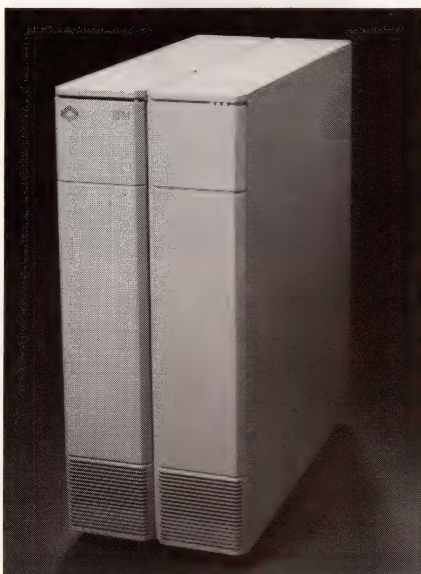

figuration. Interface cables and plug adapters insert into standard

ASIC sockets, and optional component adapters allow the use of standard components, such as memory devices and μ Ps, as part of the emulation.


The RPM Emulation System consists of stand-alone emulation hardware and software. The software is made up of the emulation setup and embedded design-analysis tools. An Ethernet interface or a SCSI port connects to Daisy, Valid, and Mentor workstations and allows the workstation to control the emulation system. Prices start at \$125,000.

Quickturn Systems Inc, 1023 N Shoreline Blvd, Mountain View, CA 94043. (415) 967-3300. FAX 415-967-3199.

Circle No 351

Graphics-based software simplifies linking ASIC design with test

TekWaves graphics-based software simplifies the job of generating test patterns for ASICs. In its initial release, the software runs only on Apollo workstations and supports only the vendor's LV500 ASIC-verification system. However, TekWaves already handles files generated by simulators from six firms and the vendor expects to support additional workstation types. Because the tester-hardware description files are in a format destined to become an industry standard, the vendor expects that the software will be used nearly everywhere that ASICs are designed or tested.

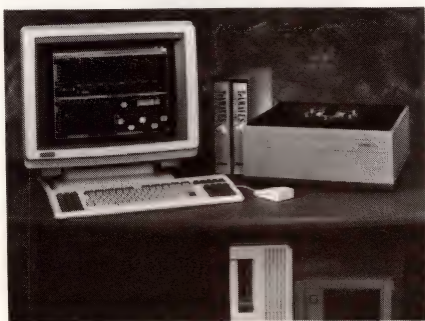

The graphics-based software displays stimulus files in either state or timing formats. You can enter and edit stimuli in both formats. You can, for example, "drag" waveform edges to alter timing and "wire" icons together to create pro-

grams without using a programming language. All files and file operations appear as icons. You use a mouse and an on-screen representation of a card file to select files and tools. Among the functions you can select in this manner are filtering to align timing cycles or to stretch or remove pulses, and checking of stimulus files to ensure that they comply with tester-hardware limitations. The software costs \$5000.


Tektronix Inc, Box 12132, Beaverton, OR 97212. Phone (800) 245-2036.

Circle No 352

Macintosh-based logic analyzer samples at 1 GHz and can expand to 384 channels

The CLAS 4000 configurable logic-analysis system can have as many as 384 channels and can acquire data at 1 GHz on 64 channels. The base model of the system includes a Macintosh SE, and the higher-performance version includes a Mac II with a 13-in. color monitor. The logic analyzer and the Mac communicate via the computer's SCSI bus, allowing you to configure systems with several logic-analyzer mainframes.

Each mainframe accommodates from one to four logic-analyzer modules. Currently, there are two varieties of modules, a 200-MHz unit that accepts 96 inputs when operated at 50 MHz and a 1-GHz 16-channel unit with two levels of trace control and event recognition. You can use the modules as several inde-

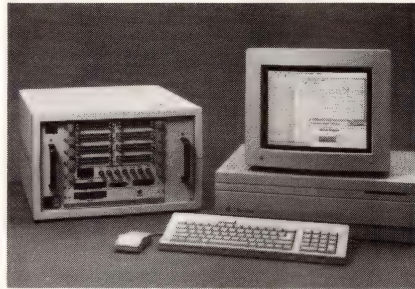

pendent but closely coupled instruments, or, with the help of software, you can configure them as a single analyzer. Both types of modules time-stamp data for time correlation.

The 200-MHz module, which the vendor calls the "pyramid" unit, operates in both state- and timing-analysis modes. It also has a mode that automatically captures data before and after the inputs satisfy the

trigger conditions. Additionally, you don't have to move probes to continue viewing the activity on selected signal lines as the module achieves sampling rates beyond 50 MHz by multiplexing channels. Instead, the supplied software lets you specify which channels you want to view and relays within the module disconnect the signals you are willing to forego viewing. Prices for CLAS 4000 systems with one analyzer mainframe and a computer range from \$19,950 to \$50,270. Delivery is 90 days ARO. The vendor also offers pods and disassemblers for popular μ Ps.


Gould Inc, 19050 Pruneridge Ave, Cupertino, CA 95014. (800) 538-9320. TWX 910-338-0509.

Circle No 353

Bus extends VXIbus for physical instruments and multiple mainframes

The MXIbus (pronounced MIX-ee-bus) enhances the VXIbus, which, by allowing implementation of high-performance card-level instruments, in turn extends the VMEbus. The MXIbus lets you daisy-chain mainframes containing VXI instrument modules and even lets you add full-size instruments and PCs to your VXIbus system.

MXIbus—an acronym for Multisystem eXtension Interface bus—provides a 32-bit, multimaster, frame-to-frame interface that lets a single VXIbus resource manager configure an entire multiframe system. Incorporating a backplane-bus-on-a-cable design, the MXIbus assigns VXIbus logical addresses to the physical devices connected to

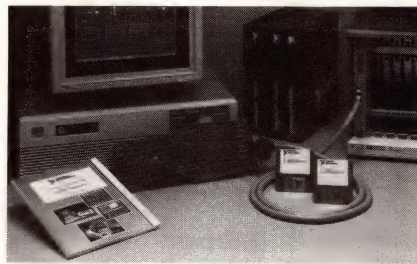

the bus. Its multi-drop parallel bus architecture provides a way to couple a VXIbus tightly to external industry-standard personal computers and to instruments that will never physically fit on a VXI module. With the MXIbus and a PC, a VXIbus system developer can use industry-standard software to speed development tasks.


To support the MXIbus, the de-

veloper has introduced the MXI-VXI and AT-MXI interfaces. The \$1995 MXI-VXI board is a C-size VXI module with slot 0 capability. You can connect as many as 32 VXI mainframes as a single VXI system with 512 slots and a common address map. A 2-meter MXIbus cable costs \$300. The \$995 AT-MXI board links an IBM PC/AT to one or more VXIbus mainframes via the MXIbus. The PC/AT treats each VXIbus chassis and its internal instrument cards as though they were plugged directly into the PC/AT.

National Instruments, 12109 Technology Blvd, Austin, TX 78727. Phone (512) 250-9119. FAX (512) 250-0382. TLX 756737.

Circle No 354

Synthesizer performance... at a price to generate some waves.

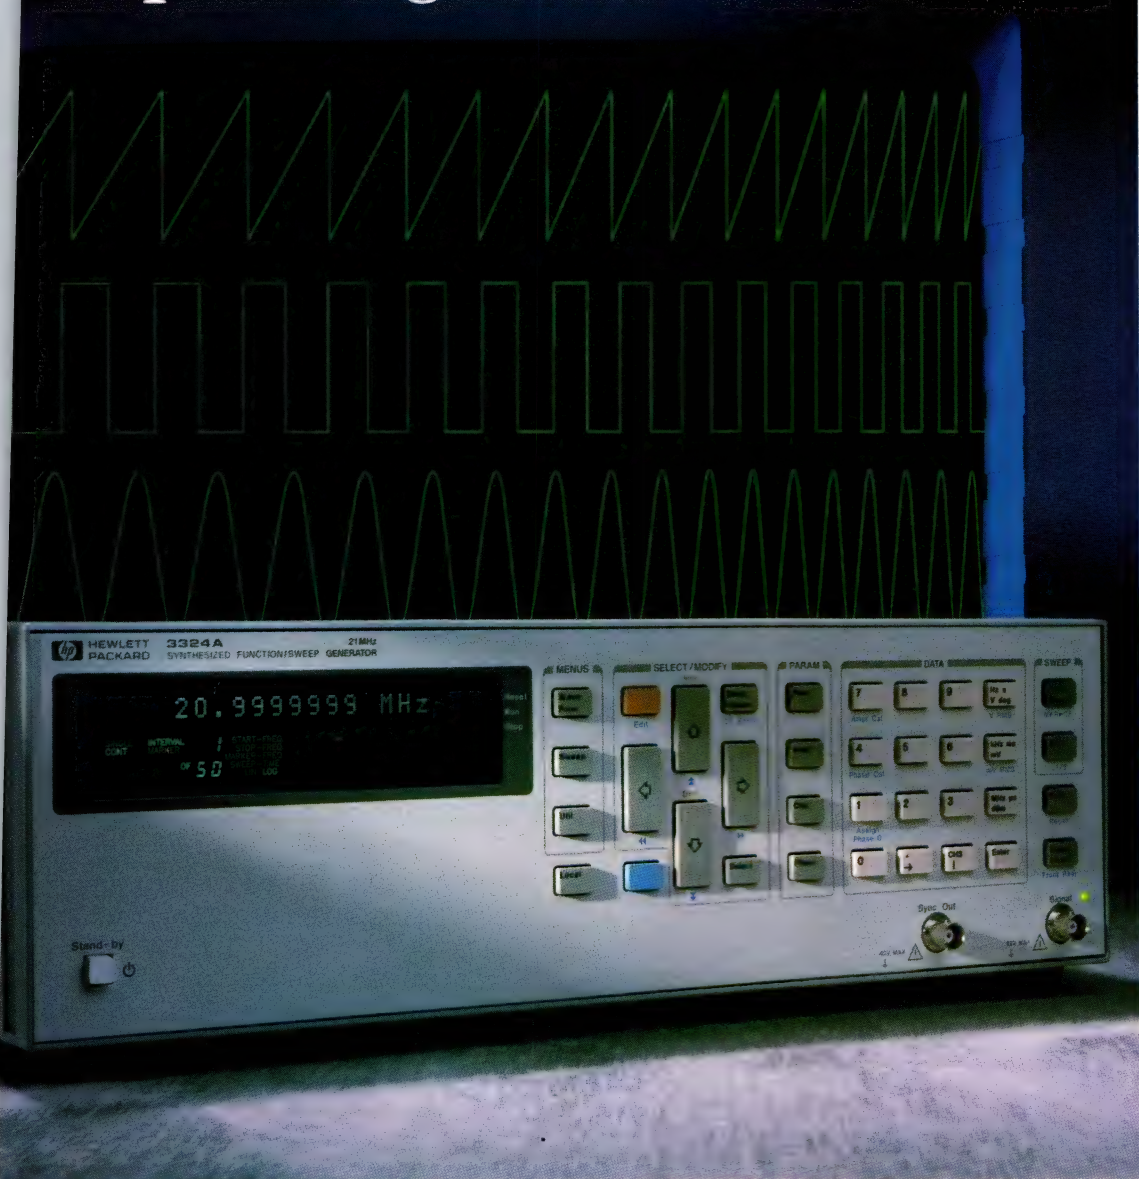

©1989 Hewlett-Packard Co. TMBID904/F

The new HP 3324A Synthesized Function/ Sweep Generator.

The low price of this new generator is bound to generate some waves. It's much less than you'd expect to pay for a function generator that has 5 ppm frequency accuracy, 9-digit frequency resolution and multi-interval sweep capabilities too.

Put it to work in testing filters and amplifiers where you need synthesizer accuracy, stability and signal purity. Tap its high linearity and multi-interval sweep features for A/D converter testing and for simulating rotating signals. Phase-lock two instruments together to calibrate phase meters and discriminators.

And there's more. Such as the

high-stability frequency-reference option, and a high-voltage output option for making really big waves. To find out how low the price really is, call your local sales office today. Ask for our detail-packed brochure and application information.




**HEWLETT
PACKARD**

Datalogger with voice synthesizer "phones in" alarm messages

The ADAS Dialog datalogger monitors the ac line voltage and the status of eight contacts at an unattended site. In the event of an alarm, the logger calls an operator on an ordinary dial-up phone line and, using a speech synthesizer, describes the nature of the alarm condition. The unit can call several operators in sequence until it receives an answer; it can also call a different list of numbers and articulate a different message for each alarm condition. A printer attached to a standard port logs the time of each alarm, the phone numbers called, the phone number that answered, and the time that the alarm condition was corrected.

An operator who visits a nor-

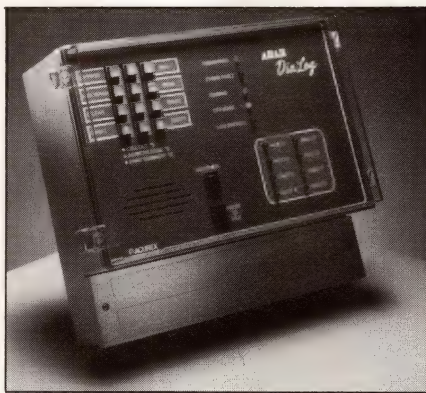

mally unattended site monitored by the logger can use the logger as a telephone—the unit includes a standard telephone keypad, a microphone, and a loudspeaker. A remote operator can also dial the datalogger and have it articulate the cur-

rent status of all monitored conditions. Password protection restricts such reports to authorized operators. You can change the passwords and alarm messages from the unit's panel or via a telephone or radio link. The attached printer will permanently record such changes.

You can program the logger's operating mode based on the time of day and the day of the week. For example, the unit's internal clock can restrict outgoing alarm calls to nights and weekends. The datalogger costs under \$2000.


Acurex Corp, Box 7555, Mountain View, CA 94039. (415) 964-3200. TLX 346391.

Circle No 355

Under-\$1k PC-based DSO effectively takes 500M samples/sec on repetitive waveforms

Costing only about half as much as most of its competitors, the PCIP-scope plugs into the IBM PC bus and acquires waveforms in real time at a rate of 20M samples/sec. When sampling repetitive signals, the unit can use sequential equivalent-time sampling and hence can acquire data at a 500M-samples/sec effective rate. Analog bandwidth, however, is 10 MHz, so you needn't use the highest sweep speed to obtain adequate sampling rates for the fastest signals the unit can capture.

After you appropriately append the PC's CONFIG.SYS file, the scope software, in the form of a device driver, loads automatically each time you load DOS. The software allows you to issue commands in English. For example, the command to set the vertical sensitivity

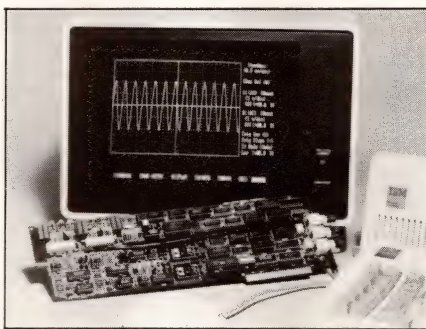

of channel A to 2V/div is "SET A VER 2V". You can issue such commands in two modes: An immediate mode allows the PC to emulate a benchtop instrument; a programmed mode simulates operation of a remote unit connected to the PC via IEEE-488. You send commands to the scope with PRINT statements and read data from it with INPUT statements. In re-

sponse to a "hot-key" sequence you define, the scope display appears on the PC's screen.

The unit's two channels have a maximum sensitivity of 5 mV/div and 1-M Ω input resistance. The inputs handle signals to ± 20 V without requiring attenuation. The trigger source can be either of the vertical inputs or a separate signal. With an external trigger source, you can trigger based on the signal's level or slope; under software control you can select the exact trigger point. The PCIP-scope costs \$999; a probe with a switchable $\times 1/\times 10$ attenuator costs \$75.

MetraByte Corp, 440 Myles Standish Blvd, Taunton, MA 02780. (508) 880-3000. FAX 508-880-0179.

Circle No 356

It's a trap.

Trap tricky hardware and software bugs, precisely.

Powerful debug commands aren't worth much if they're too difficult to use. We've designed the SA98 to trap bugs based on simple, well defined, and detailed commands.

Quick Change Artistry

No more running up and down command trees to change or modify an emulator condition. Change commands without stopping the emulator. Define in-depth breakpoints. Call up help menus and files as you need them. And you can go from 8- to 32-bit microprocessors quickly.

You Set the Rules

Define your own soft keys and macro commands. With the PC/AT

or XT function keys configured for emulation functions, you can type in and modify commands directly.

Powerful Commands

The SA98 command structure is so powerful and precise, comparing it to other systems is tough on them. Let the power of the SA98 trap your toughest problems and break out of conventional traps.

More Than Expected

Call for a demonstration, and see how good a trap it really is. You'll see fast, well defined solutions.

Call Toll-Free Today

1-800-824-9294 (U.S.)

1-800-824-6706 (CA)

**Sophia
systems.**

Dedicated to MDS/ICE Support

Available for Rent through
U.S. Instrument Rentals, Inc.
1-800-874-7123

U.S. & European Headquarters:

Sophia Systems
3337 Kifer Road
Santa Clara, CA 95051 (408) 733-1571

Corporate Headquarters:

Sophia Systems Co., Ltd.
NS Bldg. 8F
2-4-1 Nishishinjuku, Shinjuku-ku
Tokyo 160 03-348-7000

©1988 Sophia Systems

Sophia Systems is a registered trademark of
Sophia Systems Co., Ltd.

ICE is a registered trademark of Intel Corporation.

MDS is a registered trademark of

Mohawk Data Science Corporation.

IBM PC/AT and XT are registered trademarks
of International Business Machines Corporation.

CIRCLE NO 63



VF Technology... The Bright Decision

Futaba, a world leading manufacturer of vacuum fluorescent displays, offers a wide assortment of *display tubes* in many sizes and formats. Also, Futaba offers *display modules* with all the electronics required to refresh the display and easily interface with host system.

GRAPHIC DISPLAY

Both front glass phosphor, which provides maximum viewing angle and uniform surface appearance, and conventional back glass phosphor, with optimum brightness and software dimming capabilities, are available. All Futaba graphics modules offer complete drive electronics, bit mapped control with a DC/DC converter. All active components are surface mounted onto a single board.

DOT MATRIX MODULES

Utilizing Futaba's dot matrix displays, a completely intelligent line of "dot modules" is available. Each includes all drive, power supply and micro-processor components surface mounted onto a single board. Surface mounted technology results in higher reliability and allows for a smaller overall package and lower cost. All dot modules require only a 5V DC power source and can accept parallel or 8 possible serial baud rates.

GRAPHIC DISPLAYS/MODULES

Futaba Display	Futaba Module	Pixels (Row X Char.)	Brightness (FT-L)	Module Dimensions (in.)
GP1013A	GP1013A02	64X34	200	3.35X2.95X0.7
GP1005B	GP1005B03	128X64	400	7.28X3.35X1.77
GP1010B	GP1010B01	176X16	200	7.32X2.16X1.70
GP1009B	GP1009B03	240X64	200	6.2X2.76X1.57
GP1006B	GP1006B04	256X64	200	9.84X3.35X1.77
GP1002C	GP1002C02	320X240	100*	7.10X6.30X1.60
GP1018A	GP1018A01	400X240	40	7.10X6.30X1.61
GP1004C	GP1004C03	640X400	30	9.65X7.3X1.85
GP1019A	GP1019A03	640X400	35	7.10X6.70X2.56

*Different Versions Available

DOT MATRIX/CHARACTER DISPLAY MODULES

Futaba Display	Futaba Module	Char. X Row	Dot Format	Char. Ht. (in.)	Module Dimensions (in.)
16LD03G	M16LD03B	16X1	5X7	0.433	8.90X1.95X.98
16SY03Z	M16SY03B	16X1	14 SEGMENT ALPHANUMERIC	0.200	4.92X1.32X.83
20SD01Z	M20SD01	20X1	5X7	0.200	6.3X1.97X.75
20SD42Z	M20SD42	20X1	5X12	0.344	7.1X2.16X.88
40SD02Z	M40SD02	40X1	5X7	0.200	9.45X2.16X.88
40SD42Z	M40SD42	40X1	5X12	0.344	9.45X2.16X.88
202SD03Z	M202SD03	20X2	5X7	0.200	6.7X2.56X.90
402SD04Z	M402SD04	40X2	5X7	0.200	10.43X2.56X.90

MANY OTHER
DISPLAYS




NEW MODULES
AVAILABLE SOON



FUTABA
Corporation of America
Electronic Components Division

711 E. State Parkway
Schaumburg, IL 60173


Telephone: (312) 884-1444
FAX: (312) 884-1635

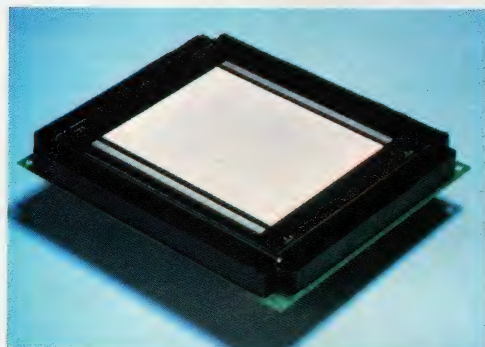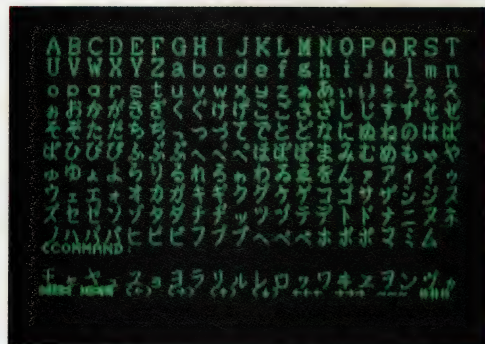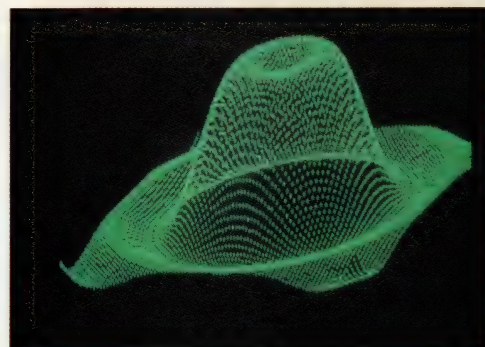

Compact, flat panel graphic displays and modules present clean, sharp images, whether for text or full graphics application.



2 x 40 character (display)

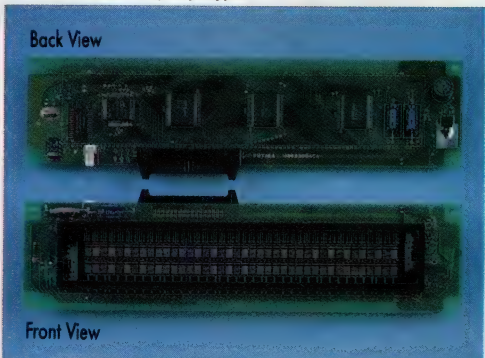

2 x 40 character (module)

Pattern flexibility and pleasing appearance are offered by Futaba in dot displays and modules.



Futaba also offers a complete catalog of alphanumeric, segmented displays.

Futaba supports its products with design engineering and system integration assistance. Call or write today.

Instruments



ASIC/PLD VERIFIER

The Personal Logic Design Verification System (PLDVS) allows you to perform functional tests and develop test programs for your ASIC and PLD-based designs. The system consists of hardware and software that combine with your IBM PC/AT or compatible computer to form a test workstation.


The PLDVS hardware includes plug-in cards for the computer and a generic socket adapter to receive the device under test. The adapter accepts devices with as many as 128 signal pins and is configurable to any device pinout and package style. You can program the system to simultaneously stimulate and read the signal pins, check for pin continuity, and monitor signal-drive current—all at rates as high as 200,000 vectors/sec. The system, which double-latches signal readings using fixed TTL or CMOS-logic thresholds, has five power supplies to operate the device under test. You can control each supply individually and set its output anywhere between -12.5 and $+12.5$ V.

The software allows you to create test programs using a Pascal-like language. You can enter test vectors in tabular form or generate them with algorithms. The software also includes a variety of utilities that allow you to design custom test-result displays. When used with the company's Max+Plus logic-design software, the system accepts waveform descriptions for test vectors. You can also display the test results as waveforms and compare simulation results with the actual performance of the com-

pany's Max EPLDs. PLDVS, including software, interface, adapters, and documentation, \$6595; graphical-interface-design software, \$3400.

Altera Corp, 3525 Monroe St, Santa Clara, CA 95051. Phone (408) 984-2800.

Circle No 669

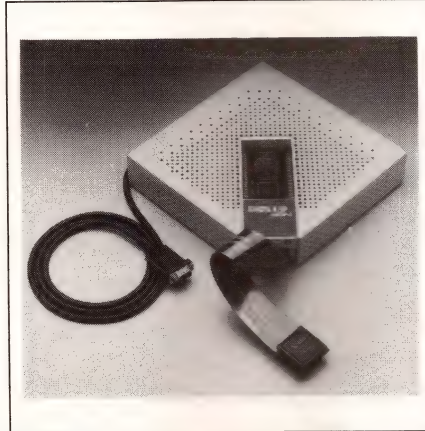

IN-CIRCUIT VERIFIER

The Mesa I in-circuit verifier offers a combination of modeling, emulation, simulation, and analysis features to ease the verification and debugging of designs using the Xilinx Logic Cell Array. This debugging tool consists of four parts: a logic pod, a probe and cable assembly, an IBM PC/AT controller board, and Microsoft Windows-based software.


The Mesa I connects the programmable gate array (PGA) in your circuit in parallel with a second PGA, called the shadow, which receives stimuli as if it were in your circuit; however, you can halt, interrogate, and reconfigure the shadow without affecting your circuit's operation. For example, using scan-test techniques, you can get a snapshot view of your design's interior logic state by halting the shadow and reading out the internal states. For a real-time view of interior nodes, you can configure the shadow to bring the internal nodes to the output pins, even if all the pins are utilized in your design. The

shadow doesn't need to generate the normal output signals while the target device is running your circuit.

The pod and probe come in 68- and 84-pin versions. The controller board supports as many as four pods, providing power and interface signals to each. To use the Mesa I, you need an IBM PC/AT or compatible. The computer must have at least 640k bytes of RAM, 1.5M bytes of hard-disk space, and a display compatible with the IBM EGA. You can use a mouse, but it's not necessary. \$9390. Delivery, eight weeks ARO.

Data I/O Corp, Box 97046, Redmond, WA 98073. Phone (206) 881-6444. TLX 152167. FAX 206-882-1043.

Circle No 670

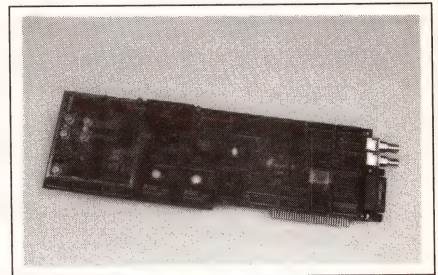

SYNTHESIZER

The VDS-8-PC 7 1/2-digit direct-digital frequency synthesizer provides an 8-MHz max output frequency and 0.1-Hz resolution combined with a 2000-point arbitrary waveform generator on a pc board that plugs into the IBM PC bus. In addition to user-defined waveforms, the unit produces sine, square, and triangular waves; pulses; ramps; and exponential, logarithmic, and $\sin(x)/x$ functions. The maximum output is 10V p-p into a 50 Ω load. You can control the output level with a software-controlled step attenuator. You can load arbitrary waveforms into the unit via the PC bus or an IEEE-488 port; the unit is fully programmable via the IEEE-488 bus. The unit produces logarithmic and linear fre-


quency sweeps and can produce waveform bursts containing 1 to 255 repetitions. \$2495. Delivery, stock to eight weeks ARO.

Sciteq Electronics Inc, 8401 Aero Dr, San Diego, CA 92123. Phone (619) 292-0500. FAX 619-292-9120. TLX 882008.

Circle No 671

IN-CIRCUIT EMULATOR

The d²ICE-51 consists of two components—the hardware module and the controlling software that runs on IBM PCs, PS/2s, and compatible computers. The software is similar to the vendor's simulator software: Through multiple windows, it allows you to control and examine the

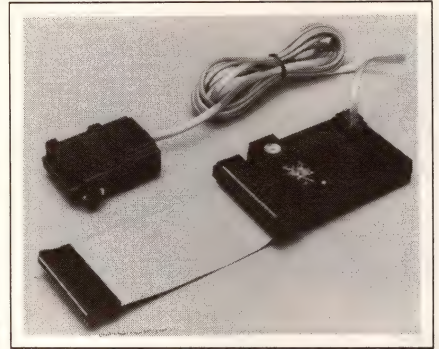

operation of the target processor, an 8051 8-bit μ C. You can run your program and observe the source code, registers, memory accesses, I/O operations, and traces. You can set up a flow window to show a flow chart, a disassembled trace, or a histogram of interrupt rates. The hardware can include 32k bytes of on-chip RAM. You plug a cable into the target processor socket; the emulator derives its operating power from the target system. You also connect the emulator to one of the RS-232C ports on the host PC. With 4k bytes of RAM, \$995; with 28k bytes, \$1250; CMOS versions, add \$200 to \$250.

Cybernetic Microsystems Inc, Box 3000, San Gregorio, CA 94074. Phone (415) 726-3000. TWX 910-350-5842.

Circle No 672

Your Logic Analyzer Really Needs The PI-6500 Pattern Generator.

Here's Why:

1. The new Pulse Instruments PI-6500 Pattern Generator and your Logic Analyzer are a cost effective alternative to high-priced test systems.
2. Working together they offer you general-purpose digital signal send-receive capability.
3. You won't have to kluge digital signals or build special circuits any more—the PI-6500 Pattern Generator and your Logic Analyzer will do it for you.
4. You can now create interactive functions between the DUT, PI-6500 Pattern Generator and your Logic Analyzer.
5. You can make R&D or one of a kind test set-ups quickly and easily.
6. You can simplify digital test systems with this "off the shelf" Pattern Generator.
7. The PI-6500 Pattern Generator allows you to test at speeds up to 25 MHz.
8. You can compare actual and expected test results.
9. You can simulate any digital input signal complete with interactive control.
10. You can create complex serial and parallel digital data streams for any application.

The PI-6500 Pattern Generator features specs like: 16 to 112 Channels, 256 Trigger/Flag Combinations, Easy Programming, Serial/Parallel Modes. And it is ideally suited to large digital test systems and military applications.

Want more information?
Call Pulse today at:

(213) 515-5330.



Pulse Instruments PI-6500 Pattern Generator.

Pulse Instruments

1234 Francisco Street • Torrance, California 90502 • (213) 515-5330

DSP DEBUGGER

The Bug-56 symbolic debugger for systems that use Motorola's 56001 chip operates under MS-DOS. Except for a resident monitor called Degmon—a scant 64 words of specialized code placed in the 56001's program memory—nearly all of the debugger's code runs on the main processor of your PC. To run Bug-56, you must install a board containing the DSP chip in one of the PC's I/O slots. One such board, the vendor's \$595 PC-56, contains, besides the 56001, a 14-bit ADC and DAC capable of sampling analog data at a rate of 20k samples/sec. The software provides a windowed display

Text continued on pg 99

Partners in Solutions



Letter from

Hank Josefczyk,

Senior Vice President

Marketing and Sales

couple of years ago, while many semiconductor companies remained committed to business as usual, we at

NEC Electronics made a major change. We realigned our resources

so we could more effectively address our customers' total service, support, and applications needs.

The result was the formation of strategic sales units—groups of specialists from sales, customer service, applications engineering, and marketing who are responsible for managing the customer-NEC interface. This allowed our customers to deal with one team of NEC Electronics people who had both access to the full range of the company's capabilities and the responsibility to integrate those capabilities in ways that best satisfied their needs.

Today, as other companies are just beginning to move in this direction, we're up and running. We have organized into teams which focus exclusively on the needs of particular industries such as automotive and telecommunications and placed them in locales close to the customer. Soon we will bring this focus to personal workstation and other key markets.

And today, one huge benefit for our customers is an effective shorten-



ing in both time and distance between our customers and NEC Corporation's operations in Tokyo to allow easier and more complete access to our extremely broad range of products and processes.

Since the mid 1980s, NEC Corporation has been the world's number one semiconductor supplier. The major reason is our technological breadth. We offer thousands of leadership products in virtually every major semiconductor arena. And we offer them on as wide a range of processes as customers will find anywhere. Together, these mean more customer choices and more opportunities to succeed than anyone else offers.

It's become clear in the IC business that anything less than a complete solution is really no solution. What matters is not having either the most products, the widest range of processes, or the best service and support. What matters is having all three and then making sure they can be united in ways that solve the customer's problem in a complete and timely manner.

At NEC, this is what we work to do.

Hank Josefczyk
Hank Josefczyk
Senior Vice President,
Marketing and Sales
NEC Electronics

Translating Global Thinking Into Customer Commitment


When NEC Corporation decided to expand in the U.S. marketplace about a decade ago, it realized that if it were to remain the leader in the world market for semiconductors, it would have to see itself less as a Japanese company that sold products in other countries and more as a truly global enterprise with focused commitments to every regional market it served. The result of this thinking was the consolidation of several small U.S. subsidiaries into NEC Electronics, Inc. in 1981.

With its charter to translate NEC Corporation's global thinking into tangible commitments to North American customers, NEC Electronics has become a company committed to offering the best of both worlds.

First, NEC Electronics is a North American company in terms of both resources and perspective. With a major manufacturing facility in Roseville, California, and customer design centers throughout the U.S., it is well positioned to serve the North American marketplace.

And second, it is supported by the world's largest semiconductor company—an organization with thousands of industry-leading products and a wide range of advanced process technologies.

"We think we bring a lot to the party," says Hank Josefczyk, NEC Electronics' Senior Vice President of Marketing and Sales. "And by this I mean total support as well as a comprehensive product portfolio. Unless you have a better way to make all your products and processes accessible to the customer, you're only handicapping yourself."

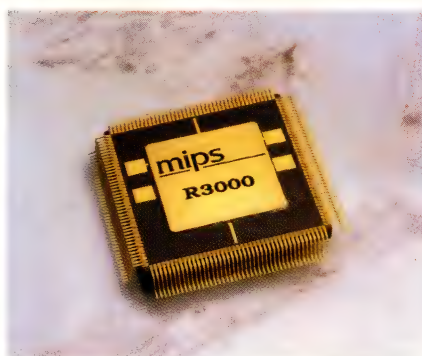

MIPS RISC Microprocessors

One of the key differentiators for NEC Electronics in North America has been its on-shore manufacturing. In 1984, NEC became the first Japanese semiconductor supplier to manufacture ICs in the U.S. Impressive by even today's standards, the company's 200,000-square-foot Roseville, California, facility rests on a 73-acre site and was developed with an initial investment of \$100 million.

Now NEC has announced a major expansion: a new 220,000-square-foot facility on the company's Roseville site. Representing an additional investment of \$400 million and eventually resulting in 400 new jobs, the facility will begin full production in 1991. It will focus on high-end memory products while the existing facility will produce a variety of ICs, including custom micros and ASICs.

NEC Electronics is also making a major commitment to expanding its design center capability. By the end of next year, the number of its North American ASIC and custom micro design centers will more than double. "This opens a couple of new doors too," adds Josefczyk. "More and

more, we will be merging capabilities to develop our regional product design centers. And more and more, our customers' products will be both designed and manufactured in North America."

Complementing these and other capabilities is NEC's extremely wide range of industry-leading products and processes. Offering thousands of different device types, NEC is a leader in virtually all major semiconductor product segments from micro to ASIC, to memory, to peripherals, to supercaps, to LEDs and lasers. In addition, it offers them in an exceptionally wide range of processes including bipolar, ECL, CMOS and BiCMOS. Of these products, NEC Electronics is focusing closely on two segments it considers of special importance to its North American customers: micro and ASICs.

In micro, NEC offers a breadth of impressive solutions that few, if any, other semiconductor companies can match. "It's like a mountain," says Chi-Foon Chan, General Manager of NEC Electronics' Micro Group. "In order to reach a great height, you need a very broad base. We're aiming high. So, we're building accordingly."

This broad base includes an industry-leading presence in the four principal micro segments—microprocessors, microcontrollers, digital signal processors, and intelligent peripherals.

The company continues to offer a growing range of its proprietary "V Series" 8-, 16-, and 32-bit CPUs, which offer particularly impressive integration and performance levels.

And, as a result of a recent agreement with MIPS Computer Systems,

EXECUTIVE OUTLOOK

NEC is now in the RISC CPU business. The company is now an alternate source for MIPS' new 20-MIPS, 25-megahertz 32-bit chip—the industry's speed leader. And the two companies are co-developing a 60-MIPS chip in ECL technology. This version will be available in early 1990.

NEC Corporation is also the world's largest manufacturer of single-chip microcontrollers and is now focusing on custom micros. These are microprocessor cores that can be combined with digital and analog macros in standard cell libraries.


"We think we have a real advantage here," says Chan. "Other companies are planning to do this. But we're already doing it in our micro-based design centers in both California and Massachusetts."

NEC has also etched strong positions for itself in the digital signal processing and peripheral areas. NEC Corporation is number two in DSP worldwide and, in peripherals, NEC Corporation was the first to set the worldwide standard in several major graphics and floppy-disk controller areas.

Complementing this expansive range of micro products is an increased commitment to micro support. In addition to more than 75 people focused exclusively on micro products at its two U.S. custom micro centers, the company also has more than 35 applications engineers based in its 22 U.S. sales offices who concentrate on micro.

In recent years, NEC has also come on strong in another product arena

Most Comprehensive Selection of ASIC Devices Available

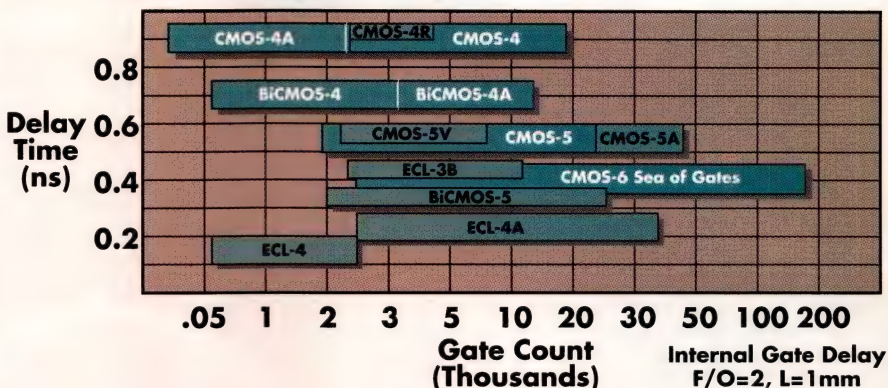

critical to its U.S. customers: ASICs. Long considered a secondary player in this market, the company has moved ahead of many well-known ASIC suppliers such as LSI Logic and Toshiba to become number two in ASIC worldwide. And, according to Dataquest, NEC Corporation has an excellent chance of replacing Fujitsu as the world's ASIC sales leader by the end of 1989.

For ASIC design, NEC supports a flexible blend of CAD tools called the OpenCad™ Integrated Toolset that combines the best third-party software with NEC's product-specific proprietary design software. Logic synthesis by Synopsis®, high-speed simulation on ZycAD's MACH 1000™, system simulation on HILO™, and floorplanning and power calculations by NEC give users unlimited design possibilities. Front-end interface support with Valid, Mentor Graphics®, Daisy, HP,

VIEWlogic, or FutureNet software on Sun, Apollo, VAX, or PC platforms give almost any designer an open door to NEC's advanced technologies. And they provide powerful block libraries with more than 300 macros, including analog, peripheral, and megamacro functions.

"As NEC's custom micro and ASIC operations move closer together in the coming years, we expect many exciting new possibilities to emerge," says Hiro Hashimoto, General Manager of ASICs. "It's the synergy story. As we blend, we will become more than the sum of our parts. The result will be even more rapid progress and more benefits for our customers."


It's easy to see why the phrase "the best of both worlds" is especially appropriate to NEC Electronics. As an affiliate of NEC Corporation in Japan, it has access to products and process technologies second to none. And, as a North American-based company in its own right, it provides the kind of total support—industry-leading manufacturing, design expertise, technical support, and service—that allows it to get as close to the customer as a semiconductor company can get. "It's a powerful combination," adds Josefczyk, "one that really helps our customer stay on top in their markets."

Worldwide Ranking

	ASIC (\$)		MOS-Digital (\$)		Memory (\$)		Total Semiconductor (\$)
Fujitsu	488 M	NEC	3114 M	NEC	1481 M	NEC	4.53 B
NEC	455 M	Toshiba	2546 M	Toshiba	1439 M	Toshiba	4.30 B
LSI Logic	367 M	Hitachi	1885 M	Hitachi	1114 M	Hitachi	3.51 B
Toshiba	360 M	Fujitsu	1437 M	Mitsubishi	943 M	Motorola	3.03 B

Source: Dataquest


Expand your product revenue curve

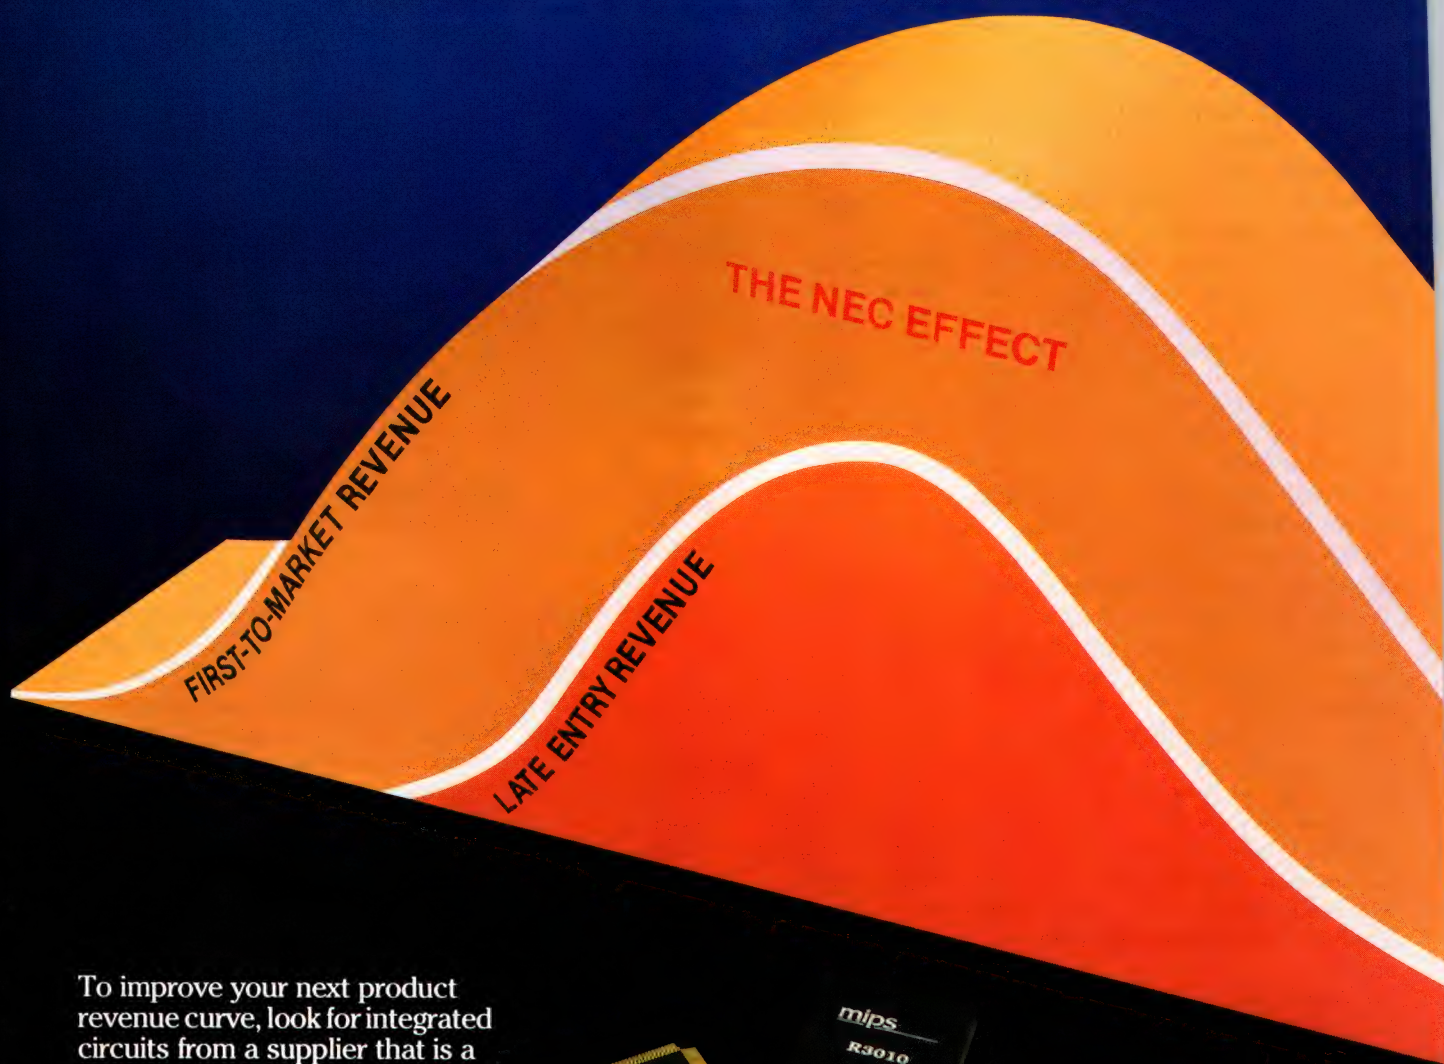

To improve your next product revenue curve, look for integrated circuits from a supplier that is a leader in quality device integration. You should also look for the leader in process technology and manufacturing capability. And finally, look for the engineering support and design assistance you need to minimize your product development time.

When you're through looking, you'll see NEC.

At NEC, you'll see the best quality devices up to 970,000 equivalent transistors — or 177,000 gates. You'll see CMOS, BiCMOS and ECL implementation across a broad range of products including custom micro, ASIC, and RISC. And you'll see production capability exceeding



MIPS looked to NEC for worldwide manufacturing, marketing and support for their RISC family of microprocessors.

\$600 million worth of components per month in 24 worldwide locations using the best silicon the world has to offer. Then, you'll see focused design assistance and local engineering support in 22 centers in the U.S. to help you bring your product to market fast.

Call today for our new ASIC and micro selection guides and see how NEC can help you expand your next product revenue curve.

NEC Electronics Inc.
401 Ellis Street
Mountain View, CA 94039-7201
1-800-632-3531/415-965-6158

© 1989 NEC Electronics, Inc.

NEC


Instruments

with pull-down menus that let you access many facilities—for example, the full-screen symbolic debugger with program tracing, symbolic breakpoints, and symbolic patch assembly.

The debugger lets you directly modify control-register bits, and it can update the register display and make changes to register and memory contents while programs run at full speed. In addition, the debugger features on-line help, a file browser, and a capability called DSpeek, which provides a graphics display of the data in any 56001 memory space with programmable scaling and zooming. The software can perform an FFT to let you view the data in the frequency domain and can send data to the PC's speaker, enabling you to hear as well as see the effects of program changes. To avoid having to simultaneously debug programs running on the DSP chip and the PC's μ P, Bug-56 also lets programs running on the 56001 perform a wide range of MS-DOS functions. \$395.


Ariel Corp, 433 River Rd, Highland Park, NJ 08904. Phone (201) 249-2900. FAX 201-249-2123.

Circle No 673

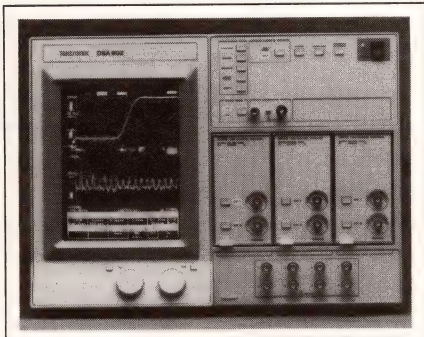


SIGNAL ANALYZERS

The DSA 601 and 602 digitizing signal analyzers combine a high-speed DSP capability with a digital storage oscilloscope that has a 1-GHz bandwidth and that, in one version, takes 2G 8-bit samples/sec in real time. The instruments perform floating-point operations almost



SS2 SERIES PHOTO SENSORS

SMALL IN SIZE - BIG ON PERFORMANCE

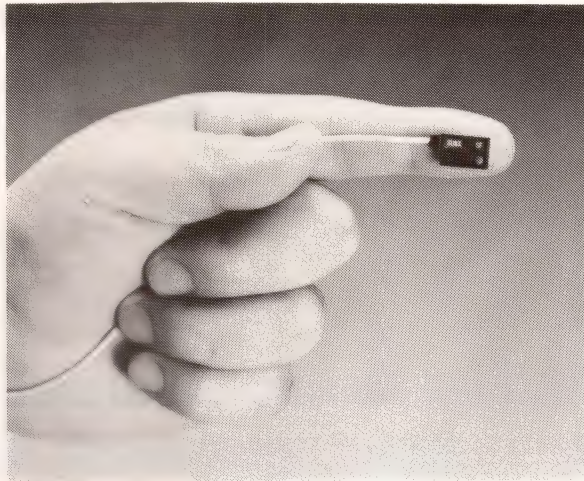

COMPACT: Thru-beam is only 8 x 12 x 3mm in size. Diffuse reflective is 12 x 12 x 3mm

LONG DETECTING DISTANCE: The modulated infrared light source allows the diffuse reflective type to sense objects at 50mm max. The thru-beam has a 300mm max. distance.

SMALL OBJECT DETECTION: Both the thru-beam and diffuse reflective types will detect objects as small as 0.3mm in size.

VERSATILE CONTROL AMPLIFIERS: 3 types of DC amplifiers with NPN/PNP selectable output; with response times of 1ms or 3ms. Two types of AC amplifiers with relay contact output; with 20ms response. Both types are available with optional 3 mode, selectable time delay.

LOW COST: Sensors are \$40.00 ea. without the amplifier.

for a catalog contact:



RAMCO ELECTRIC CO.

P.O. BOX 65310, 1207 MAPLE ST.
WEST DES MOINES, IOWA 50265
TELEPHONE: (515) 225-6933
FAX: (515) 225-0063

CIRCLE NO 67

Instruments

two orders of magnitude faster than the vendor's previously highest performing scopes. They also perform several functions that the earlier products could not; for example, they can present simultaneous displays of waveforms and their spectra and update them "live" at approximately $20\times/\text{sec}$.


Among the features made possible by signal processing is the ability to dejitter waveforms. The instruments automatically time-shift newly acquired data sets to provide the best fit with a stored reference waveform. The result is a jitter-free display. The instruments provide very deep waveform storage. Each

waveform can comprise as many as 32k samples. All units contain non-volatile storage for 258,560 samples. As an option, you can add storage for more than 450,000 additional samples. Both DSA instruments accommodate three plug-in units. Without plug-ins or options, 2-channel DSA 601 mainframe, \$21,025; 4-channel DSA 602, from \$27,125.

Tektronix Inc., Box 500, Beaverton, OR 97077. Phone (800) 835-9433.

Circle No 674

"I will *not* sacrifice controlled impedance for an interconnect small enough to fit my design."

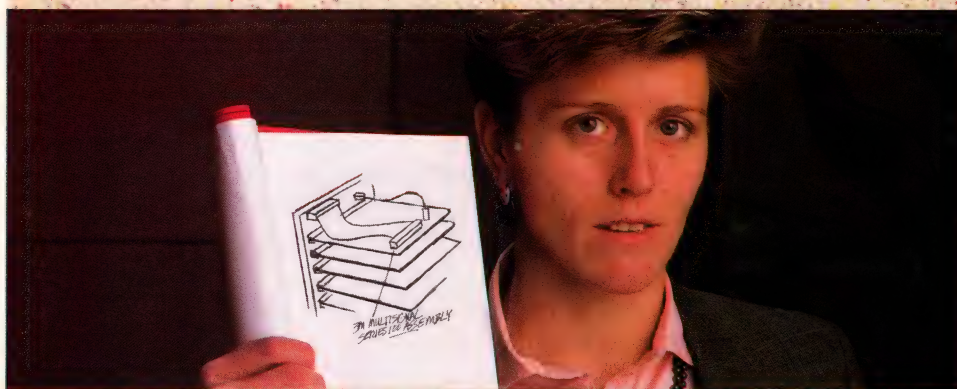


Need controlled impedance? Tight on space? **Tough customers turn to 3M.**

We've got the solution: our MultiSignal™.100" sockets terminated to controlled-impedance 50-120 ohm ribbon cable. Maximize signal speeds while you maximize your board real estate, too.

For more high-speed solutions, write 3M Electronic Products Division today at P.O. Box 2963, Austin, TX 78769-2963, or call 1-800-227-1831. And ask for a TLA™ specialist.

CIRCLE NO 68

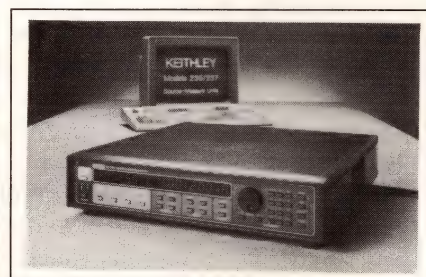


SOURCE/MEASURE UNITS

The Models 236 and 237 source/measurement units combine the capabilities of a DMM, an electrometer capable of measuring 10 fA, and a 4-quadrant dc power source that can also generate arbitrary waveforms. You can use the instruments on a benchtop or mount them in an equipment rack; they are just 3½ in. high. They can force currents as small as 100 fA and voltages as small as 100 µV. Voltage-measurement resolution is 10 µV, and basic accuracy is 0.03% of reading. To reduce noise, the units permit guarded 4-terminal operation and can both integrate and average measurements. To find small deviations about a large value, the units suppress (automatically subtract) offsets as large as 1100V or 110 mA.

The instruments can acquire 1000 values/sec and store them in an internal memory. You can then empty the memory via an IEEE-488 interface at a rate of 125 measurements/sec. Similarly, you can update the source output from the



hop, hop, hop, hop, hop
chirp, chirp, chirp
jitter, jitter, jitter

...like you've never seen them before.

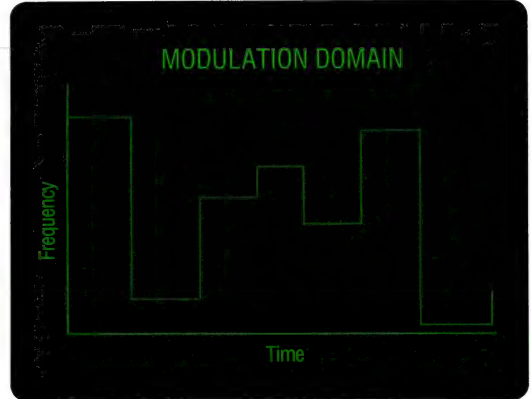



hop

...a time-domain view of a frequency-agile signal (left) reveals little useful information. The new modulation-domain view on the right clearly shows the hopping sequence, settling times, and channel frequencies.

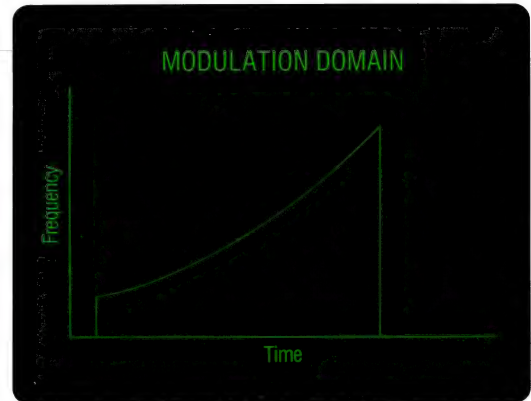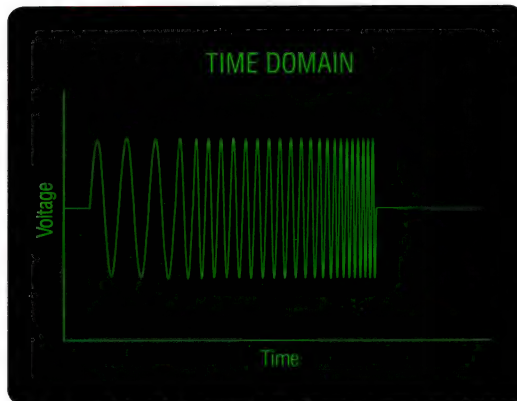

chirp

...no quantitative data is available from the time-domain view of a radar chirp on the left. However, the frequency vs time display of this single-shot event clearly shows chirp linearity and frequency.

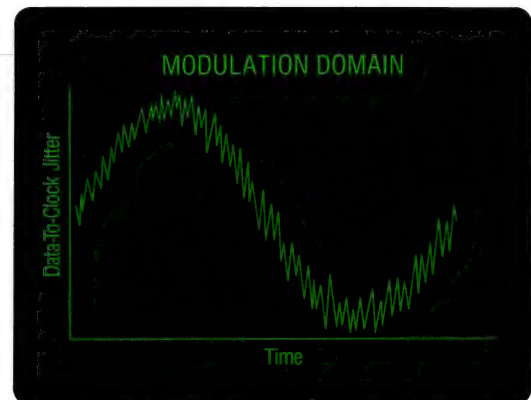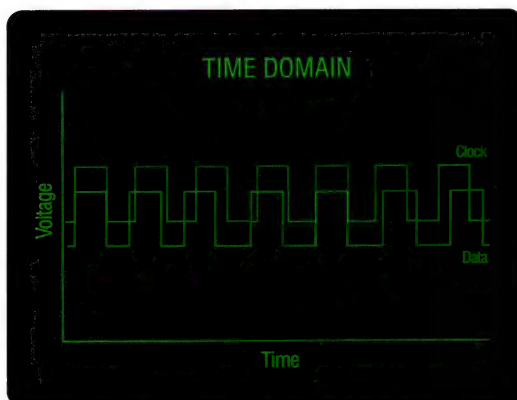


jitter

...a time-domain view of jitter shows only that the jittered data's edge is constantly changing with respect to the clock. In the modulation domain, the jitter magnitude and periodic content are clear.

HP introduces the modulation domain.

Totally new measurement concepts are rare. The oscilloscope was one. It brought the time domain to voltage measurements. Spectrum analysis, which added the frequency domain, was another. Now, there's a breakthrough that puts you in the modulation domain. Dynamic frequency and time interval analysis.

The new HP 5371A Frequency and Time Interval Analyzer gives you entirely new ways to view dynamic signals. Views that simplify and speed analysis of transient signals, modulation, and frequency stability. As well as time transients, jitter, and timing relationships between signals. If you're designing equipment for communications, radar, mass storage, data processing, and ATE, the HP 5371A gives you new insights for faster troubleshooting and characterization.

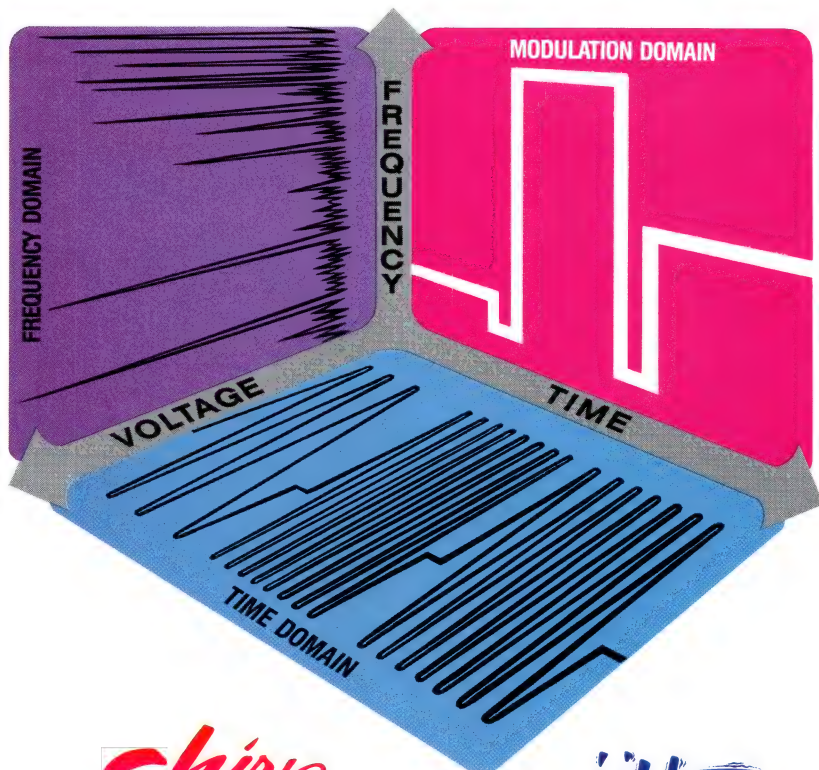

hop

...agile radio measurements that were impossible until now.

Say goodbye to static back-to-back and "golden unit" testing that's been costing you time and money without delivering the quantitative measurements you need.

Complete characterization of hopping radio transmitters is easy for the HP 5371A. Its dynamic single-shot capability captures hopping sequence, carrier frequencies, and modulation. Then it displays signals in a frequency vs time plot for quantitative measurements of overshoot and settling time (valuable for VCO signals too). You can also examine FM details. And, histogram displays give a clear picture of channel usage.

chirp

...radar signal characterization in a snap.

Because the HP 5371A captures single-shot events and performs fast statistical computations, you can simply and inexpensively characterize pulse parameters that affect target resolution, range, and accuracy.

There's no easier way to analyze chirp linearity or phase coding than the direct measurements of frequency vs time in the modulation domain. And histogram plots of pulsewidth jitter and pulse repetition frequency give you quantitative and reliable measures of system performance. Expensive and cumbersome delay line discriminators are eliminated...forever.



jitter

...finally,

precise quantification for performance prediction.

The HP 5371A's statistical analysis and histogram capability, combined with time-variation plots, give you a valuable new tool for quantifying the affects of jitter and wander in digital communications, data storage, and computer systems.

Histogram displays and statistics of frequency or time interval show you quickly whether jitter effects are Gaussian or systematic. These results reveal valuable information leading to the prediction of bit error rate. And modulation domain displays give you a useful view of jitter periodicity. An FFT of this data gives you a jitter spectrum. With the HP 5371A, you can troubleshoot faster and get better characterization of timing jitter than ever before.

See the back page for more information. Or contact your local HP sales office for detailed product information.



**HEWLETT
PACKARD**

The HP 5371A...your window to the modulation domain.

As significant a development as the scope or spectrum analyzer, the new HP 5371A Frequency and Time Interval Analyzer is the first commercially available instrument to make continuous frequency measurements and display frequency vs time directly. It's sure to become a basic tool in every R&D lab.

Performance to match your measurement needs.

- dc to 500 MHz (500 MHz bandwidth at microwave frequencies)
- 2 GHz to 18 GHz capability available with the HP 5364A
- up to 10 million measurements per second
- 1 ns minimum pulsewidth
- 150 ps single-shot resolution, 1 ps repetitive resolution
- 2 mV trigger level resolution

Powerful arming and triggering for measurement control.

- Holdoff by time, events or signal edge
- Sample by time, events or edge
- Arm on any of three input channels: External, A, or B

A choice of measurement modes and analyses.

- Frequency, period, phase and time interval
- Positive or negative pulsewidth, duty cycle
- Rise time, fall time
- Time variation, event timing, histograms, statistics, limit test

Plus accessories and HP-IB compatibility


Of course you can combine the HP 5371A with other test instruments and computers via the HP-IB for enhanced capability. It will also drive HP printers and plotters directly for hard-copy records. And a variety of accessories and options are available to match your specific application.

Get there faster in the modulation domain

Like its predecessors — scopes and spectrum analyzers — the frequency and time interval analyzer is sure to give designers greater insight into system problems, and provide dramatic savings in product development and manufacturing. That's the best reason yet to explore the modulation domain. So contact your local HP sales office for additional product information on the HP 5371A. Now, it's up to you.



**HEWLETT
PACKARD**

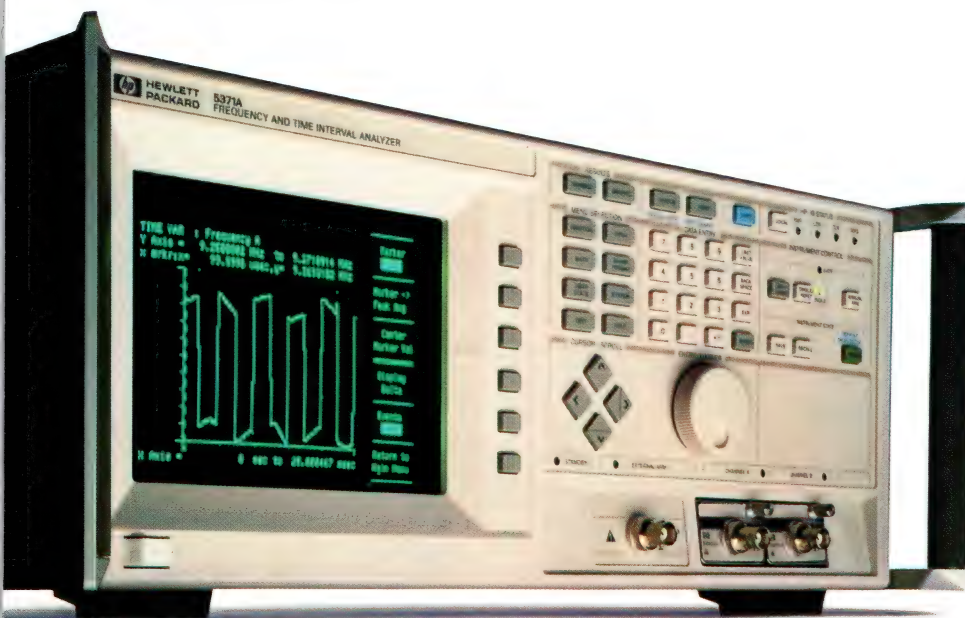

Instruments

internal memory at 1000 points/sec. Source settling time is 500 μ sec, and the units' outputs are transient free when you turn power on or off. Model 237, \$6295; Model 236, \$4995.

Keithley Instruments Inc, 28775 Aurora Rd, Cleveland, OH 44139. Phone (800) 552-1115; in OH, (216) 248-0400. TLX 985469.

Circle No 675



isolated from the chassis. CMRR exceeds 80 dB at 60 Hz. System noise is <3 counts p-p, and full-power analog bandwidth is 500 kHz. The unit uses your IBM PC/AT or compatible computer as a host; its proprietary interface plugs directly into the 16-bit bus and transfers data to memory using DMA. The maximum rate for long bursts of data depends on the bus speed; on a 10-MHz PC/AT clone, in which I/O operations do not slow the clock (as they do on faster machines), you achieve speeds in excess of 300k points/sec. With a PC/AT equipped

with 16M bytes of RAM, you can record 8M samples. A trio of third-party software packages, Dadisp, Assystant, and Snapshot Storage Scope, are sold separately and incorporate drivers for the unit. From less than \$4000; software, \$500 to \$1000. Delivery, 90 days ARO.

Acrosystems Corp, 66 Cherry Hill Dr, Beverly, MA 01915. Phone (508) 927-8880. FAX 508-922-5114.

Circle No 676

WAVEFORM DIGITIZER

The AT6400 is a waveform digitizer that has capabilities equal to those of competitive units that cost three or four times as much. It digitizes two to eight channels to 14 bits at a combined maximum rate of 1M samples/sec; you can slow the rate in 0.25- μ sec increments to $\frac{1}{16}$ M samples/sec and in steps of 1.6 to 3% to 2 samples/sec. The most sensitive full-scale range is ± 128 mV. The inputs are differential, and are

SPECTRUM ANALYZER

The compact, 42-lb 2782 spectrum analyzer has a 1024 $\times$ 1024-pixel, nonfading, 2-color display that uses a CRT in conjunction with a liquid-crystal shutter. The device can indicate the presence of signals from 100 Hz to 33 GHz and can perform direct fundamental mixing to 28 GHz. Using external waveguide mixers, the analyzer can display

Be An Author!

When you write for EDN, you earn professional recognition. And you earn \$75 per published magazine page.

EDN publishes how-to design application information that is read by more than 137,300 electronics engineers and engineering managers worldwide. That's an audience that could belong to you.

If you have an appropriate article idea, send your proposal and outline to: John Haystead, 275 Washington Street, Newton, MA 02158-1630.

For a FREE EDN Writer's Guide—which includes tips on how to write for EDN and other technical publications—please circle number 800 on the Information Retrieval Service Card.

EDN

First in Readership among Design Engineers and Engineering Managers in Electronics.

TANTALUM CHIP CAPACITORS FOR SURFACE-MOUNT DEVICES

MATSUO ELECTRONICS
2134 Main Street, Suite 200 (714) 969-2491
Huntington Beach FAX (714) 960-6492
California 92648

signals at 1.2 THz. Even beyond 5 GHz, the dynamic range exceeds 100 dB. At 28 GHz, the resolution bandwidth can be as small as 3 Hz or as large as 10 MHz. At 18 to 20 GHz, single-sideband phase noise is lower than that of some competitive instruments by as much as 30 dB. Third-order modulation products

are -90 dBc (90 dB below carrier) to 6.5 GHz and -80 dBc above 6.5 GHz.


The menu-driven operator interface always lets you see the names of all menus above the current one in the hierarchy. A press of the ESC key allows you to exit from the current menu to one at the next

higher level; from the top level, pressing ESC causes the menus to disappear and enlarges the spectrum display. In addition to the soft keys beside the display, the front panel includes a dedicated numeric keypad, cursor keys, and three rotary control knobs. One knob always controls frequency. You assign functions to the other knobs via the menu system. The unit includes two IEEE-488 ports, simplifying the creation of control programs that, for example, send data to mass-storage peripherals. \$65,000.

Tektronix Inc., Box 500, Beaverton, OR 97077. Phone (800) 835-9433.

Circle No 677

Cermetek's Modem Components Are... Quick To Market

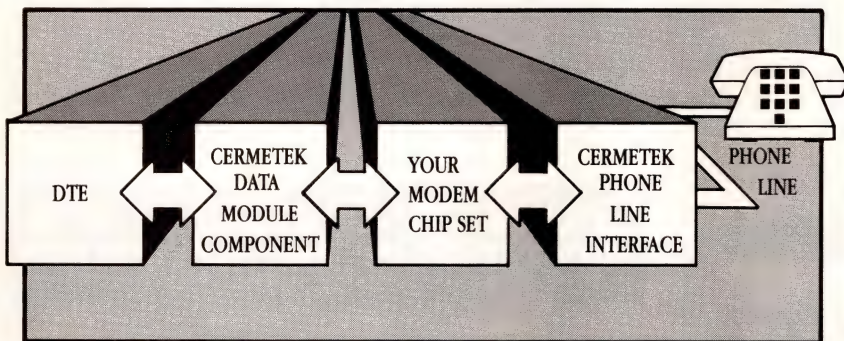

When considering a modem design, selecting the proper modem chip set is only part of the solution. You must consider the type of telephone interface used, what method of error control and agency approval needed, either domestic or international. Determining these factors is time consuming, costly and complex. The solution? **Cermetek!**


Our family of modem components allows the design engineer to surround a modem chip set, making it a complete modem, quickly and economically.

So when you need part of a solution, or the whole modem solution, Cermetek has the expertise and the right answers for you. Find out how Cermetek can enhance your existing or future modem design. Call Cermetek today for more information or write us at:



Modem Components
189X Data Module Features
X.25 LapB, MNP Class 4 and 5, error correcting and data compression, autobaud speed conversion, flow control, RS-232 interface, AT compatible command format driven—1890, 1891, 1892 MNP is a registered trademark of Microcom, Inc.
18XX DAA's Features
Telephone interface, Access Arrangement (DAA)—pre-approved domestic/international, voice data switch, 2- to 4-wire converter, surge protection, isolation, dialing feature, low cost and small size. 1810, 1811, 1812A, 1813, 1814, 1818, 1828

Call Toll Free Outside CA 800/862-6271
Inside CA (408) 752-5000
Cermetek Microelectronics, Inc.
1308 Borregas Avenue
Sunnyvale, CA 94088

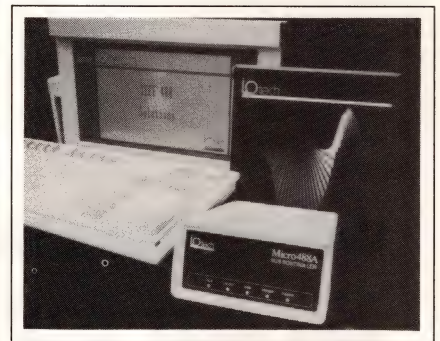

IEEE-488 CONTROLLER

The Micro488A allows you to connect IEEE-488 devices to an RS-232C or RS-422 port that operates as fast as 57.6k bps. The unit can act as a talker or a listener on an IEEE-488 bus as long as 4000 ft that connects as many as 14 devices. To minimize traffic through the relatively slow serial interface, the unit can output stored character strings in response to 1-character commands. You can define as many as 100 of these "macros." The unit, which uses Hewlett-Packard programming syntax, can also buffer 32,000 characters. \$695.

IOtech Inc., 25971 Cannon Rd, Cleveland, OH 44146. Phone (216) 439-4091. TWX 650-282-0864.

Circle No 678

Text continued on pg 111

For System Simulation Users,
The Build-vs-Buy Decision
Just Became Obvious.



Build With Teradyne EDA.

As board and system complexity is growing, and the time-to-market window continues to shrink, simulation of systems at all levels has become a crucial requirement—especially with ASIC-based designs.

Teradyne EDA makes full system simulation practical. No longer will your best attempt at true simulation be limited to a piecemeal, simulator-by-simulator break-up of your entire system. Now, you can build a highly modular, truly integrated, open simulation environment—one that supports completely interactive mixed-mode, mixed-level simulation through multiple simulators.


Introducing MultiSim, The First Multi-Vendor Simulation Environment.

MultiSim™, the newest Teradyne EDA product, provides a software backplane that allows multiple simulators from multiple vendors to work concurrently on a single design. Now, you can build with exactly the simulators you want, keep all of your models and use the simulator that's best for each part of the design. You don't throw anything away.

MultiSim, which runs on industry platforms, is the solution for system simulation at all levels, in even the most sophisticated design environment. Integrate your custom in-house simulators with ASIC vendor and commercial simulators, as well as Teradyne's AIDA, LASAR or VANGUARD tools which operate in the MultiSim environment.

For further information, contact Georgia Marszalek at Teradyne EDA, 5155 Old Ironsides Drive, Santa Clara, CA 95054, (408) 980-5200.

TERADYNE

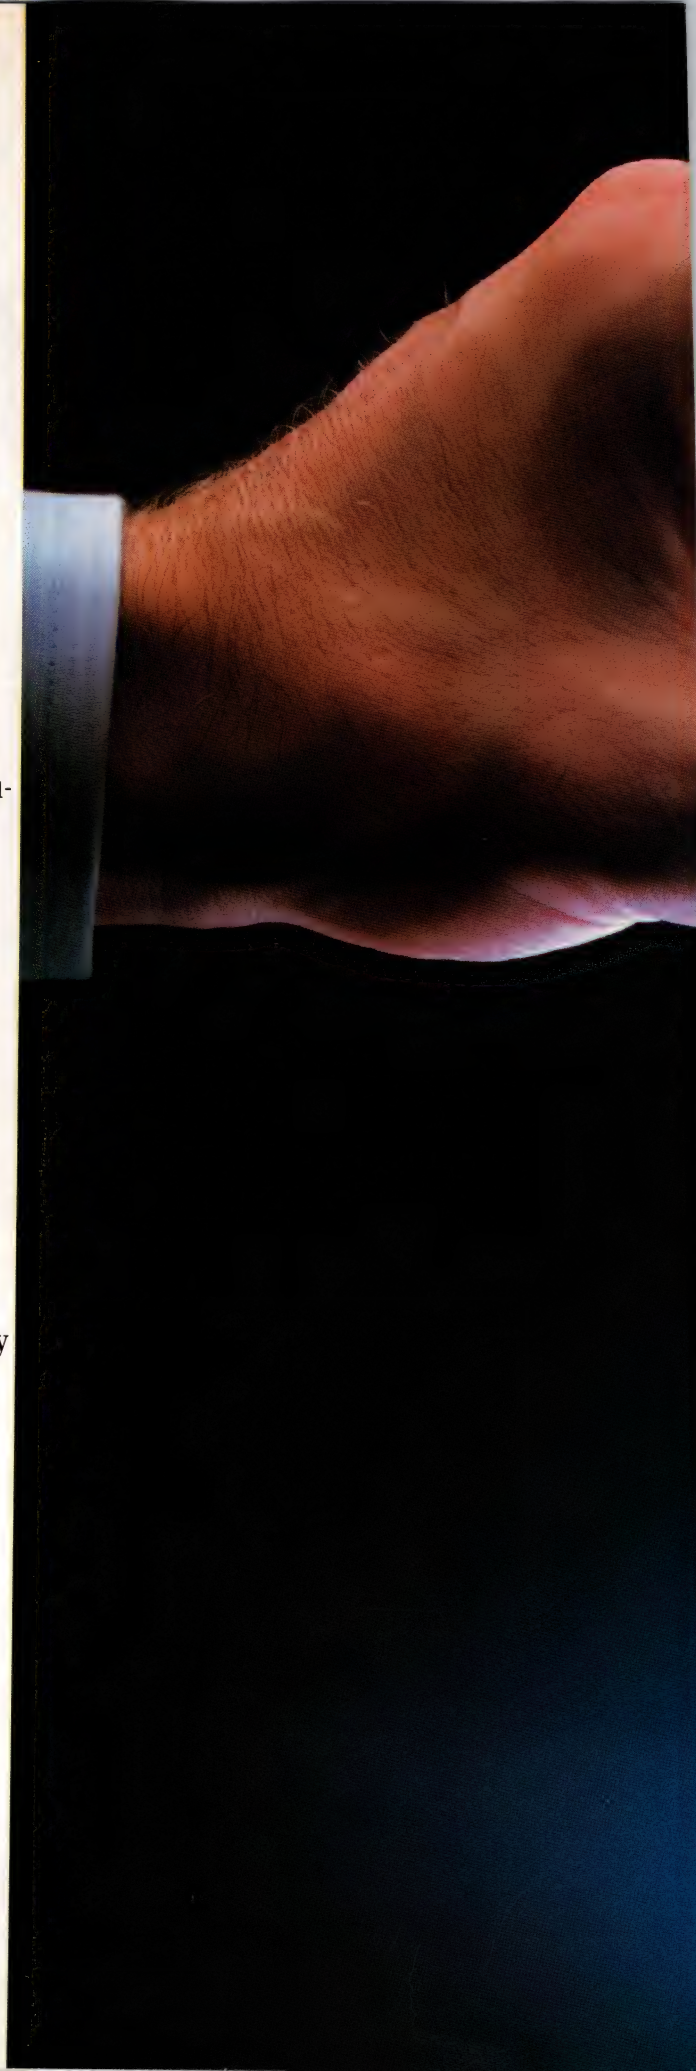





WORLD CLASS QUALITY

Now you can get world famous Wren™ disk drives direct from your local distributor.

Designed for Original Equipment Manufacturers (OEM), Wren drives are used in many of the most popular PC's and workstations. They set the high-performance standards for 5¼" drives.

With capacities from 50 MBs to 1.2 GBs and industry standard ST506, SCSI, ESDI and PC-AT interfaces, there is a Wren solution for your needs.

Quality you can count on.

Imprimis is the world's leader in 5¼" high-performance, high capacity disk drives. The complete line of Wren drives feature field proven MTBF in excess of their 40,000 hr. specification.

PC-AT compatible

Wren PC-AT models offer capacities from 65 to 380 MBs in a half-height form factor. A true 1:1 interleave provides faster data access. Wren provides the ultimate price/performance ratio for AT-compatible microcomputer users.

Easy IBM PC, XT and AT installation

Several models come in "kits." Kits contain everything you'll need to install the drive, plus easy-to-follow instructions. Installation takes less than 30 minutes. A diskette-based software routine prepares the drive for use. Kits are available for Apple Macintosh and Novel LAN too.

Factory certified RLL

All RLL models are certified at the factory using RLL controllers so you can be sure they'll work on your system.


For the authorized distributor nearest you call:

Arrow Electronics:

Industrial OEM **1-800-777-ARROW**
Commercial Resellers **1-800-323-4373**

Anthem Electronics:

Northwest Region **1-800-359-3502**
Central Region **1-800-359-3517**
Eastern Region **1-800-359-3511**
Southwest Region **1-800-359-3501**

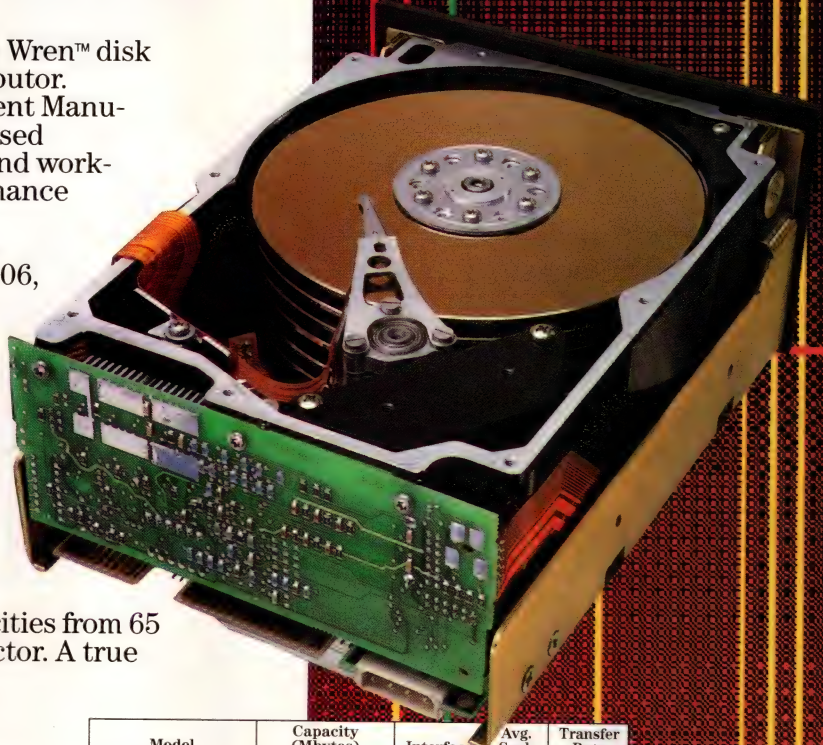

Model	Capacity (Mbytes) (UF)/(F)	Interface	Avg. Seek (ms)	Transfer Rate (MHz)
WREN VII	1200/1050	*SCSI	16.0	15-23
WREN VI	766/676	*SCSI	15.5	15
		ESDI	15.5	15
WREN VI H/H	383/338	*SCSI	15.0	18-20
	383/338	ESDI	16.0	15
	383/338	AT	16.0	15
	274/242	AT	16.0	15
	164/145	AT	16.0	15
WREN V	702/613	*SCSI	16.5	12-16
	385/339	*SCSI	10.7	15-16
	442/390	ESDI	16.0	10
	383/338	ESDI	14.5	10
WREN V H/H	209/183	*SCSI	18.0	9-15
	125/109	*SCSI	18.0	9-15
WREN IV	376/330	*SCSI	17.5	10-15
	350/307	*SCSI	16.5	9-15
WREN III	182/160	*SCSI	16.5	10
	182/160	ESDI	16.5	10
WREN III H/H	106/94	*SCSI	18.0	10
	106/94	ESDI	18.0	10
WREN II	135/115	RLL	28.0	7.5
	96/80	ST506	28.0	5
	86/71	ST506	28.0	5
	86/71	ESDI	28.0	5
WREN II H/H	81/74	AT	28.0	7.5
	77/65	RLL	28.0	7.5
	51/41	ST506	28.0	5

H/H Half Height Models. (UF) - Unformatted Capacity. (F) - Formatted Capacity at 512 Bytes/Sector. All WREN Disk Drives have 40,000 hours MTBF. * Apple Mac compatible interface available.

LOCAL AVAILABILITY

*Get the high-performance edge...
Wren disk drives from Imprimis.*

Authorized Distributor Sales Offices


Alabama	Iowa	Ohio
Huntsville Arrow 205-837-6955 Anthem 205-883-0829	Cedar Rapids Arrow 319-395-7230	Cleveland Arrow 216-248-3990
Arizona	Kansas	Columbus
Phoenix Arrow 602-437-0750	Kansas City Arrow 913-541-9542	*Arrow 614-436-0928
Tempe Anthem 602-966-6600	Lenexa Anthem 913-599-1528	Dayton Arrow 513-435-5563
California	Maryland	Worthington
Chatsworth Anthem 818-775-1333	Baltimore Arrow 301-995-6002	Anthem 614-888-8707
Irvine Anthem 714-768-4444	Columbia Anthem 301-995-6640	Oklahoma
Los Angeles Arrow 818-701-7500	Massachusetts	Tulsa Arrow 918-252-7537
Hayward *Arrow 415-489-5371	Boston Arrow 508-935-5134	Oregon
Orange County Arrow 714-838-5422	Wilmington Anthem 508-657-5170 *Arrow 617-658-7100	Beaverton Anthem 503-643-1114
Rocklin Anthem 916-624-9744	Michigan	Portland Arrow 503-645-6456
San Diego Arrow 619-565-4800 Anthem 619-453-9005	Detroit Arrow 313-971-8220	Pennsylvania
San Francisco Arrow 408-745-6600	Grand Rapids Arrow 616-243-0912	Horsham Anthem 215-443-5150
San Jose Anthem 408-453-1200	Minnesota	Philadelphia Arrow 215-928-1800
Tustin *Arrow 714-838-1233	Eden Prairie Anthem 612-944-5454	Pittsburgh Arrow 412-856-7000
Colorado	Missouri	Texas
Denver Arrow 303-790-4444 Anthem 303-790-4500	St. Louis Arrow 314-567-6888	Austin Arrow 512-835-4180
Connecticut	New Hampshire	Dallas Arrow 214-380-6464
Meriden Anthem 203-237-2282	Manchester Arrow 603-668-6968	Houston Arrow 713-530-4700
Wallingford Arrow 203-265-7741	New Jersey	Richardson Anthem 214-238-7100
Florida	Fairfield Anthem 201-227-7960	Utah
Clearwater Anthem 813-797-2900	Marlton Arrow 609-596-8000	Salt Lake City Anthem 801-973-8555 Arrow 801-973-6913
Ft. Lauderdale Arrow 305-429-8200	Parsippany Arrow 201-538-0900	Washington
Orlando Arrow 407-323-0252	New Mexico	Redmond Anthem 206-881-0850
Georgia	Albuquerque Arrow 505-243-4566	Seattle Arrow 206-575-4420
Atlanta Arrow 404-449-8252	New York	Wisconsin
Norcross Anthem 404-381-0866 *Arrow 404-449-8252	Hauppauge Anthem 516-273-1660	Milwaukee Arrow 414-792-0150
Illinois	Long Island Arrow 516-231-1000	Puerto Rico
Chicago Arrow 312-250-0500	Melville *Arrow 516-391-1847	Hato Rey Arrow 809-764-4384
Elk Grove Anthem 312-640-6066	Rochester Arrow 716-427-0300	Canada
Indiana	North Carolina	Montreal Arrow 514-735-5511
Indianapolis Arrow 317-243-9353	Raleigh Arrow 919-876-3132	Ottawa Arrow 613-226-6903
*Arrow Regional Commercial Resellers	Winston-Salem Arrow 919-725-8711	Quebec Arrow 418-687-4231
		Toronto Arrow 416-672-7769
		Vancouver Arrow 604-291-2986

IMPRIMIS

A Subsidiary of Control Data

CIRCLE NO 72

Instruments

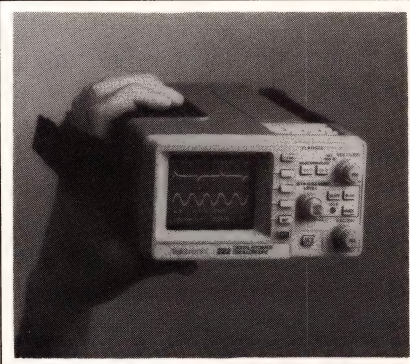

HANDHELD DSO

The 222 digital-storage oscilloscope (DSO) has a 10-MHz bandwidth and is small enough to fit in your toolbox. With its built-in battery, the scope weighs 4½ lbs and measures 3½ × 6¼ × 10 in. Each of the two y-axis inputs is ohmically isolated from the other input and the chassis. The scope samples to 8-bit precision at 10M samples/sec; at fast sweep speeds, it automatically switches to equivalent time sampling. Despite its small size, the 222 incorporates many conveniences found in full-size DSOs—for example, storage and recall of control setups. An RS-232C port allows you to control the scope from a remote terminal or computer and lets you upload captured waveforms. \$2350.

Tektronix Inc., Box 1700, Beaverton, OR 97075. Phone (800) 426-2200.

Circle No 679

VXIBUS COMPUTER

The EPC-2 is a complete 80386-based personal computer in a double-width, C-size VXIbus (VMEbus extensions for instrumentation) module. The plug-in unit includes a 1.44M-byte 3½-in. floppy-disk drive, a 40M-byte SCSI-interfaced hard disk, a CRT controller that conforms to the VGA (video graphics array) standard, a parallel port, two RS-232C serial ports, a keyboard port, and an IEEE-488 port. The unit can combine the functions of a system controller, a VXI slot 0 device, and an IEEE-488 bus con-

Instruments


troller. In a package called the EPC-2000, the vendor includes a keyboard, MS-DOS 3.3, Windows/386, a link for migration of programs from a PC to the EPC-2, and a group of software packages collectively called EPConnect 2.0. EPConnect defines a human interface and a program interface to the VXIbus. It provides both development and run-time support. EPC-2000, \$9550.

Radix Microsystems Inc, 19545 NW Von Neumann Dr, Beaverton, OR 97006. Phone (800) 950-0044.

Circle No 680

UNIVERSAL SOURCE

The HP 3245A combines a bipolar dc voltage/current source with an arbitrary-waveform generator that has a 4.3-MHz sample rate and produces 1-MHz waveforms. You can set the dc outputs with 6½-digit

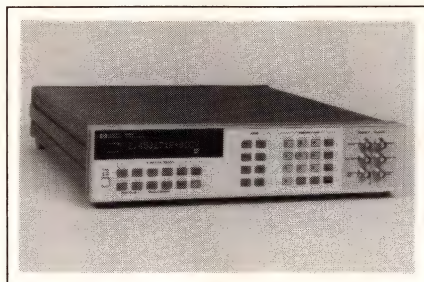

precision. Maximum voltage is $\pm 10.25\text{V}$ and maximum current is $\pm 100\text{ mA}$. You can define waveforms with as many as 2048 points and store multiple waveforms in nonvolatile RAM. An optional software package includes a library of standard waveforms and facilitates waveform definition, capture, modification and playback. With one channel, \$4200; with two channels, \$6700; software, \$400.

Hewlett-Packard Co, 19310 Pruneridge Ave, Cupertino, CA 95014. Phone (800) 752-0900.

Circle No 681

1M-BIT DRAM TESTER

The RAMcheck 1-Meg Adapter works with the vendor's RAMcheck tester and Speed Verifier to perform functional and dynamic tests on 1M-bit dynamic RAMs configured both as 1M-bit $\times 1$ and 256k-bit $\times 4$ devices. The $3 \times 5.5 \times 1.5$ -in. adapter, which weighs $< 1\text{ lb}$, connects to the similarly sized RAMcheck unit. It automatically identifies the type of device you place in its zero-insertion-force socket, then performs a test in 4 to 7 sec. A 7-segment LED display on the RAMcheck unit indicates the device's condition. When used with the speed verifier, the adapter and the RAMcheck unit permit you to determine a device's access time. \$199.

Innoventions Inc, 11000 Stancliff Rd, Suite 150, Houston, TX 77099. Phone (713) 879-6226.

Circle No 682

Be An Author!

When you write for EDN, you earn professional recognition. And you earn \$75 per published magazine page.

EDN publishes how-to design application information that is read by more than 137,300 electronics engineers and engineering managers worldwide. That's an audience that could belong to you.


If you have an appropriate article idea, send your proposal and outline to: John Haystead, 275 Washington Street, Newton, MA 02158-1630.

For a FREE EDN Writer's Guide—which includes tips on how to write for EDN and other technical publications—please circle number 800 on the Information Retrieval Service Card.

EDN

First in Readership among Design Engineers and Engineering Managers in Electronics.

Instruments

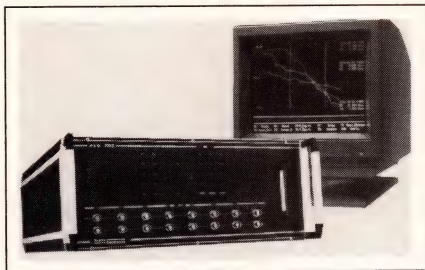

8-CHANNEL DSO

The PSO 7010 8-channel waveform digitizer incorporates a 10-MHz, 80286-based PC and includes a 14-in. high-resolution color monitor, thus creating an 8-channel digital storage scope. The system can include as much as 8M words of waveform memory; word length can be 8, 10, or 12 bits. The maximum sampling rate is 20M samples/sec. The unit includes a 1.44M-byte 3½-in. floppy-disk drive and can run all MS-DOS-based software, including programs that perform mathematical operations on stored waveforms.


Such operations include addition, subtraction, multiplication, division, integration, smoothing, and computation of FFTs. \$10,000 to \$18,000. Delivery, four to six weeks ARO.

Krenz Electronics, 940 Calle Amanecer, Suite P, San Clemente, CA 92672. Phone (714) 361-6866. FAX 714-361-6867.

Circle No 683

PC TESTER

The Postcard is a half-length card that plugs into the IBM PC bus and performs a series of power-on self-test routines that pinpoint problems in "dead" PCs—even in ones that won't load the DOS. One of the routines is a burn-in loop that runs continuously to locate intermittent problems. The card works in IBM PCs, PC/XTs, PC/ATs, PS/2 Model 30, PS/2 Model 30 286, and 80386-

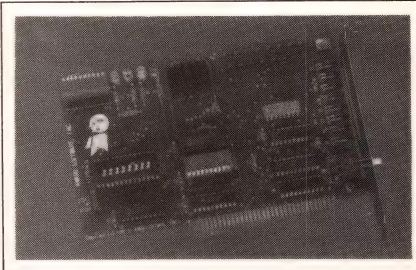

based systems. It is compatible with the vendor's Modular BIOS (basic input/output system) and the BIOS of another vendor. Extended diagnostics test a computer's base memory, video functions, rigid and flexible disk drives, parallel and serial ports, keyboard, math coprocessor, and extended memory. \$399.

Award Software Inc, 130 Knowles Dr, Los Gatos, CA 95030. Phone (408) 370-7979. FAX 408-370-3399.

Circle No 684

EDN INFO CARDS

THE 1½¢ SOLUTION

to your marketing budget blues—the EDN Info Card Pack. At 1½¢ per name, the EDN Info Card Pack can reach over 123,000 engineering specifiers affordably.

Call Donna Pono at (617) 558-4282 for details.

EDN Magazine
Edition
News
Edition

A Partnership in Power and Prestige Worldwide



Add-in graphics boards

available for three major buses

Margery Conner, Regional Editor


As powerful microprocessors such as the 80386 and 68030 become commonplace in PC/AT-bus, VMEbus, and Multibus I and II systems, these systems require equally powerful graphics boards.

A year ago, you had next-to-no boards to choose from if you needed a fast, high-resolution graphics processor for your VMEbus or Multibus I or II system: These chips were mostly found on graphics boards designed for the PC/AT bus. But today you can choose from a wealth of fast, high-resolution graphics boards for all three buses.

Deciding on a board for the PC/AT bus may be more difficult than for the other buses due to the expected emergence of the 8514/A adapter board as an industry graphics standard by the end of this year. (For a representative list of add-in graphics boards for the PC/AT bus, see **Table 1**.) This board offers 256 colors and a resolution of 1024×768 pixels—specs that are respectable rather than impressive. But 1000×1000 pixels is probably the

minimum resolution practical for workstation-based CAD/CAE applications, and the 8514/A's specs mark the first time a resolution approaching this minimum has been available as an industry-accepted standard for IBM-compatible PCs.

And standards mean everything when it comes to ensuring a board's success in the PC/AT-graphics market. Consider, for example, that PC/AT-bus graphics boards based on Texas Instruments' TMS34010 graphics processor have been available for more than 18 months, yet none of the graphics software interfaces for the boards—from such respected graphics companies as Number Nine, Matrox, and Graphic Software Systems (Beaverton, OR)—has become a widely accepted graphics standard. Texas Instruments, no doubt seeing this lack of a software-interface standard as

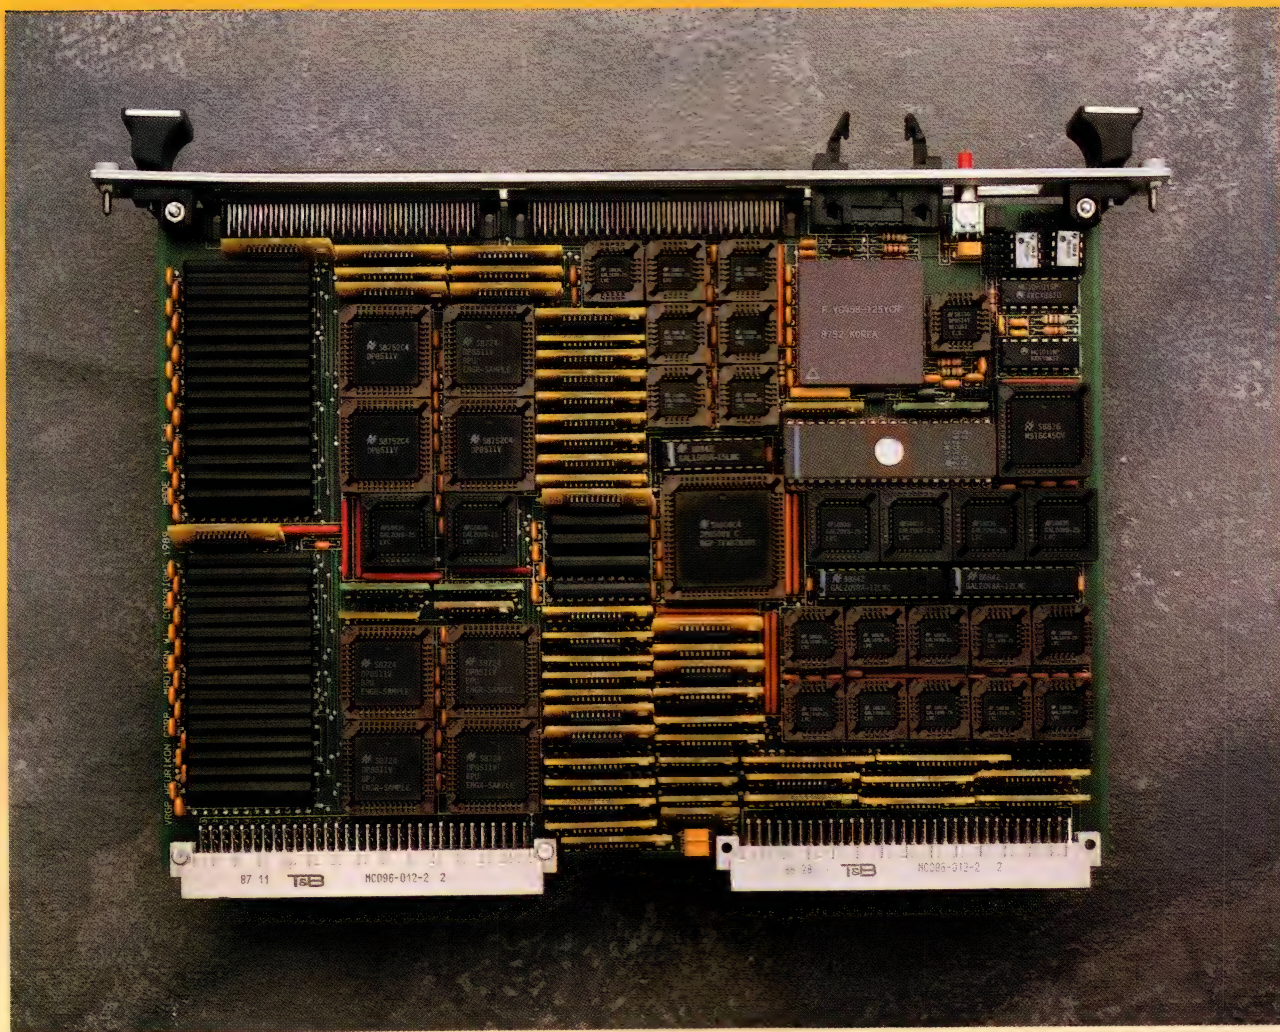

limiting sales of 34010-based boards, has responded by developing the Texas Instruments Graphics Architecture (TIGA).

TIGA comprises a library of graphics primitives—such as drawing a circle—for the 34010. Because the 34010 is programmable, it can command display hardware to draw a circle in an almost unlimited number of ways. This capability gives you great flexibility but makes writing the interface between an application program and the 34010 processor a formidable task. By standardizing graphics primitives in TIGA, TI has made porting the 34010 to application programs a straightforward task.

You can hedge your bet on the probable 8514/A standard by using TIGA with TI's 8514/A emulation software: 34010-based boards running the TIGA interface and 8514/A emulation software will appear to 8514/A application software to be 8514/A boards. You can expect to hear multitudes of claims from the 8514/A-clone manufacturers that the hardware copy of the board is faster than the software emulation and counterclaims from TI that using TIGA and 8514/A emulation software results in unlimited flexibility and no appreciable speed loss. Regardless of how or if these claims are resolved, the 34010 emulation

Text continued on pg 116

VMEbus 1024 × 1024-pixel, 256-color board, based on National Semiconductor's RGP graphics-processor chip set (Heurikon Corp)

TABLE 1—REPRESENTATIVE HIGH-RESOLUTION GRAPHICS BOARDS FOR THE PC/AT BUS

MANUFACTURER/BOARD NAME	PIXEL RESOLUTION	COLORS	GRAPHICS* PROCESSOR	MEMORY (BYTES)		PRICE	COMMENTS
				DISPLAY	PROGRAM		
ADEX CORP MODEL 1005/1010/1020 MODEL 1210/1220	1024x768 1280x1024	16 OR 256 16 OR 256	ACRTC ACRTC	0.5M-2M 1M-2M		\$1680-3482 \$2396-3556	
COMPAQ COMPUTER CORP ADVANCED GRAPHICS 1024	1024x768	256	34010	512k VIDEO RAM	128k	\$1499	OPTIONAL \$599, 512k-BYTE VIDEO RAM.
CONTROL SYSTEMS, INC ARTIST TI12	1280x1024	256	34010	1.25M VIDEO RAM	0.5M	\$4259-5495	
ARTIST DESIGNER 16	1280x1024	1	34010	1.25M VIDEO RAM	640k	\$4295	
ARTIST XJ10	1024x768	16 OR 256	ACRTC	1M-1.5M		\$2695-3795	
ARTIST XJ12	1280x1024	16 OR 256	ACRTC	1M-2M		\$3495-5995	
ARTIST TI10	1024x768	16 OR 256	34010	1M-1.5M		\$2995-3095	
ENERTRONICS RESEARCH INC AUTOROUTE 1024	1024x768	256	34010	1M VIDEO RAM		\$1495	\$1795 WITH VGA OPTION.
GENDA SYSTEMS CORP SUPER HGA	1024x768	256	34010	1M VIDEO RAM	256k	\$1895	
IMAGRAPH CORP TI1210 SERIES	1280x1024	16 OR 256	34010	1.25M+ OVERLAY	512k-4M	\$3235-4195	
IMAGE 32	1024x1024	16.7M	ACRTC	4M		\$8995	USES 1M-BIT DYNAMIC RAMS.
MATROX ELECTRONIC SYSTEMS LTD PG-1024 SM-1024 PG-1281	1024x768 1280x1024 1280x1024	16 OR 256 256 16 OR 256	34010 34010 34010	512k 1M 1M	512k 2.5M 1.5M	\$2820-3145 \$6995 \$3995-4595	2-D GRAPHICS BOARD; CAN BE UPGRADED TO 3-D.
SM-1281	1280x1024	256	34010	2M	2.5M	\$8495-8995	3-D GRAPHICS BOARD.
MICROFIELD GRAPHICS INC V8	1280x1024	256	2901	2M		\$4495	VGA-COMPATIBLE. CUSTOM CHIP PERFORMS BITBLTS.
T8B	1280x1024	256	2901	2M		\$3595	EGA-COMPATIBLE. INTERLACED AND NONINTERLACED.
T8A	1280x1024	256	2901	2M		\$3495	INTERLACED AND NONINTERLACED.
MICROWAY CORP VIDEOPUTER	1024x1024	256	34010	1M	1M-4M	\$4995	BOARD ALSO HAS T800 TRANSPUTER THAT SHARES RAM WITH 34010. REQUIRES A MONOPUTER (T800-BASED BOARD) IN SYSTEM.
NUMBER NINE COMPUTER CORP PEPPER PRO1024	1024x768	256	34010	1M	0.5M-1M	\$2495	ALSO AVAILABLE FOR MICROCHANNEL BUS.
PEPPER 1600	1600x1200	256	34010	1M-4M	1M-4M	FROM \$1895	
PEPPER PRO1280	1280x1024	256	34010	1.25M		FROM \$2995	
PEPPER SGT PLUS	1280x768	16 OR 256	34010	1M-4M		FROM \$1995	VGA PASS-THROUGH.
OMNICOMP GRAPHICS CORP OMNI 1400 GDC	1280x1024	256	ACRTC	FROM 1M		FROM \$1795	SUPPORTS CGA.
OMNI 1600 GDC	1280x1024	256	ACRTC	FROM 1M		FROM \$2145	MULTIPLE OVERLAY PLANES; 16X ZOOM MODEL 1620 SUPPORTS TRUE COLOR WITH AS MANY AS 24 BIT PLANES.

Graphics boards based on the 34010 have been available for the PC/AT bus for more than a year, but no graphics interface has emerged as an industry standard.

TABLE 1—REPRESENTATIVE HIGH-RESOLUTION GRAPHICS BOARDS FOR THE PC/AT BUS (CONT.)

MANUFACTURER/BOARD NAME	PIXEL RESOLUTION	COLORS	GRAPHICS* PROCESSOR	MEMORY (BYTES)		PRICE	COMMENTS
				DISPLAY	PROGRAM		
PARACOM INC GDS	1024x768	256	T800	1M	1M	\$5090-5590	PRICE DEPENDS ON T800 CLOCK SPEED.
PARALLAX GRAPHICS INC VIPER	1280x1024	256	16-BIT PROPRIETARY	4M		\$5495	VGA EMULATION, OPTIONAL VIDEO-INPUT CARD.
PIXELAB GC-1280	1280x1024	16	34010	1M VIDEO RAM	0.5M-1.5M	\$3300	
GM-1664	1664x1200	1	34010	384k VIDEO RAM	0.5M-1M, 1.5M	\$2600	
RENAISSANCE GRX INC RENDITION II	1024x768	256	34010	1M	512k	\$1495-2395	VGA OPTION; TIGA INTERFACE.
VECTRIX CORP PEPE	1024x1024	16	PROPRIETARY	0.5M		\$2950	OPTIONAL \$850 LINE-DRAW-ACCELERATOR ASIC. \$350 VGA OPTION.
PRESTO	1280x1024	16 OR 256	34010	1.2M	0.5M	FROM \$3145	
VX1024	1024x768	16 OR 256	34010	768k	0.5M	FROM \$1495	
WESTERN DIGITAL IMAGING VERTICOM MX SERIES	1024x768	16 OR 256	34010	384k-768k	256k-512k	\$1695-2095	VGA COMPATIBLE.

*ACRTC=HITACHI'S HD63484, 34010=TEXAS INSTRUMENTS' TMS34010, 2901=AMD'S 2901 BIT-SLICE PROCESSOR, T800=INMOS'S T800 TRANSPUTER.

of the 8514/A is the most practical way, short of purchasing an original and expensive IBM 8514/A adapter board, of ensuring 8514/A compatibility for your PC/AT-bus system.

Manufacturers of 34010-based boards vary in their support of TIGA. Some, such as Compaq, simply say that their boards will run under TIGA, but the buyer must purchase TIGA and install it. Other vendors, such as Omnicomp, enthusiastically embrace TIGA. Omnicomp is even considering making TIGA the standard interface for all its 34010-based boards. But regardless of manufacturers' support, you can usually assume that a 34010-based board will run TIGA.

Another graphics IC that's popular for PC/AT-bus add-in graphics boards is Hitachi's (San Jose, CA) ACRTC. One of the first intelligent graphics controllers, the ACRTC is a hard-wired graphics processor—that is, the processor can implement a graphics primitive, such as drawing a line or a circle, in only one way. Because the graphics primitives are hard-wired,

ACRTC-based boards can create shapes at high speeds—often as fast as 34010-based boards. However, ACRTC graphics primitives cannot be modified, unlike those of programmable graphics processors, such as the 34010.

The 34010 and the ACRTC are also the most popular processors for VMEbus systems. (For a representative list of add-in graphics boards for the VMEbus, see **Table 2.**) These aren't the only two processors available, however. The Heurikon HK85/VGRP board, for example, uses National Semiconductor's (Santa Clara, CA) Advanced Graphics Chip Set (AGCS). This chip set has a master raster graphics processor and one bitblit (bit block transfer) processing unit (BPU) per bit plane. The dedication of one BPU per bit plane enables the processor to run at very fast speeds for applications, such as bitblits, that benefit from a parallel rather than a serial architecture.

One graphics board designed for VMEbus systems,

Text continued on pg 120

TABLE 2—REPRESENTATIVE HIGH-RESOLUTION GRAPHICS BOARDS FOR THE VMEBUS

MANUFACTURER/BOARD NAME	PIXEL RESOLUTION	COLORS	GRAPHICS* PROCESSOR	MEMORY (BYTES)		PRICE	COMMENTS
				DISPLAY	PROGRAM		
AMERICAN ELTEC OPAC	1280 x 1024	16 OR 256	2 QPDMs	2M		\$4600 OR \$5600	THREE OPACs CAN BE CASCADED TO PROVIDE 24 BITS OF COLOR.
HRG-2	1024 x 2048	16	7220	1M		\$1700	
PIG	1024 x 1024	256	ACRTC	2M		\$2800-4900	
EUROPEL SYSTEMS OPAL 2	2048 x 2048	256	68020	2M		\$8500	
FORCE COMPUTERS INC AGC-2	1024 x 800	16	ACRTC	1M		\$2995	
GRAPHIC STRATEGIES INC VGME-34010	1280 x 1024	256	34010	2M	2M	\$5495	
VGME-6408	1024 x 1024	256	ACRTC	1M		\$2995-3495	
VGME-1024	1024 x 1024	16	7220	1M		\$2295	
GREEN SPRING COMPUTERS INC VME 360	1024 x 1024	16	34061	512k		\$625-850	SINGLE-HEIGHT BOARD.
HEURIKON INC HK85/VGRP	1024 x 1024	256	AGCS	1M	0.5M	\$4295	AS MANY AS THREE BOARDS CAN BE CASCADED.
IMAGRAPH CORP VME GRAPHIC PLUS SERIES	1280 x 1024 (MAX)	16 OR 256	ACRTC	2.5M		\$5195-5495	
INTEGRATED SOLUTIONS INC VME-GCC	1280 x 1024	16	29116	1M		\$3695	2-BOARD SET
VME-GCM	1280 x 1024	1	29116	0.5M		\$2795	
IRONICS INC IV-1651	1024 x 1024	16	7220	0.5M		\$1035	
LITTLE MACHINES INC VVG/IP	1024 x 768	256	34010	364k VIDEO RAM	2M-4M	\$1675-3675	TWO ONBOARD PROMS CAN STORE USER PROGRAMS.
MATROX INC VG-1281	1280 x 1024	256	34010	2M-4M	1M	\$5495-7495	
METACOMP INC 1280V-GDS	1280 x 1024	16 OR 256	QPDM	2M	2M	\$6980	2-BOARD SET INCLUDES ONBOARD 68020.
1280V-GDP	1280 x 1024	16 OR 256	QPDM	2M		\$3525	
MOTOROLA INC MVME395	1280 x 1024	256	34010	2M	0.5M	\$4995	CONTROLS A MAXIMUM OF FOUR GRAPHICS DISPLAYS.
MVME393	1024 x 2048 (MAX)	16	34010	2.5M		\$2495	
OMNCOMP GRAPHICS CORP OMNI 8600 GDC	1600 x 1280	256	34020	7M	1M	FROM \$6220	
PARACOM INC GDS	1024 x 768	256	T800	1M	1M	\$5090-5590	PARALLEL PROCESSING ARCHITECTURE REQUIRES \$595 BUS ADAPTER.
PARALLAX GRAPHICS INC VIPER	1280 x 1024	256	16-BIT PROPRIETARY PROCESSOR	4M		\$5795	OPTIONAL VIDEO INPUT CARD AVAILABLE.
PSI-TECH INC VME/2T	1280 x 1024	256	68020	1.3M	1M	\$7000	2-BOARD SET, SECOND 68020 HANDLES I/O.
RASTER GRAPHICS INC RG703	1024 x 768	256	34010	0.5M		\$2595	
TADPOLE TECHNOLOGY INC TPAGCV	1280 x 1024	256	TWO QPDMs	4M		\$9995	

*34010=TEXAS INSTRUMENTS' TMS34010, 34020=TEXAS INSTRUMENTS' TMS34020, ACRTC=HITACHI'S HD63484, AGCS=NATIONAL SEMICONDUCTOR'S RGP AND BPU, QPDM=AMD'S AM95C60, 7220=NEC7220, 34061=TEXAS INSTRUMENT'S TMS34061, 68020=MOTOROLA'S 68020, T800=INMOS'S T800 TRANSPUTER, 29116=AMD'S AM29116.

For more information . . .

For more information on graphics boards such as those discussed in this article, circle the appropriate numbers on the Information Retrieval Service card or use EDN's Express Request service. When you contact any of the following manufacturers directly, please let them know you saw their products in EDN.

Adex Corp
1750 Junction Ave
San Jose, CA 95112
(408) 436-9700
FAX 408-436-9706
Circle No 428

American Eltec Inc
569 S Marengo
Pasadena, CA 91101
(818) 449-1558
FAX 818-578-0054
Circle No 429

Compaq Computer Corp
20555 FM 149
Houston, TX 77070
(713) 370-0670
Circle No 430

Control Systems Inc
2675 Patton Rd
Saint Paul, MN 55113
(612) 631-7800
Circle No 431

Enertronics Research Inc
5 Station Plaza
1910 Pine St
Saint Louis, MO 63103
(314) 421-2771
Circle No 432

Europel Systems Ltd
5 Vo-Tec Centre, Hambridge Ln
Newbury, Berkshire RG14 5TN UK
(44) 635 31074
FAX 44-635-31070
Circle No 433

In the US, call:
C & C Technology Inc
Bldg 9, Unit 60
245 W Roosevelt Rd
West Chicago, IL 60185
(312) 231-0015
FAX 312-231-0345
Circle No 434

Force Computers Inc
3165 Winchester Blvd
Cambell, CA 95008
(408) 370-6300
FAX 408-374-1146
Circle No 435

Genoa Systems Corp
75 E Trimble Rd
San Jose, CA 95131
(408) 432-9090
Circle No 436

Graphic Strategies Inc
549 Weddell Dr
Sunnyvale, CA 94086
(408) 745-6500
FAX 408-744-0235
Circle No 437

GreenSpring Computers
1204 O'Brien Dr
Menlo Park, CA 94025
(415) 327-1200
FAX 415-327-3808
Circle No 438

Heurikon Corp
3201 Latham Dr
Madison, WI 53713
(608) 271-8700
TLX 469532
Circle No 439

Imagraph Corp
11 Elizabeth Dr
Chelmsford, MA 01824
(508) 256-4624
FAX 508-250-9155
Circle No 440

Integrated Solutions Inc
1140 Ringwood Ct
San Jose, CA 95131
(408) 943-1902
Circle No 441

Ironics Inc
798 Cascadilla St
Ithaca, NY 14850
(607) 277-4060
FAX 607-272-5787
Circle No 442

Little Machines
11010 Roselle St
San Diego, CA 92121
(619) 452-3897
Circle No 443

Matrox Electronic Systems Ltd
1055 St Regis
Dorval, Quebec
Canada H9P 2T4
(514) 685-2630
FAX 514-685-2853
Circle No 444

Metacomp Inc
15175 Innovations Dr
Bldg A
San Diego, CA 92128
(619) 673-0800
Circle No 445

Microfield Graphics Inc
9825 SW Sunshine Ct
Beaverton, OR 97005
(503) 626-9393
TLX 3777991
Circle No 446

Micro Industries Inc
691 Greencrest Dr
Westerville, OH 43081
(614) 895-0404
Circle No 447

Microway
Box 79
Kingston, MA 02364
(508) 746-7341
FAX 508-746-4678
Circle No 448

Motorola Inc
Microcomputer Div
2900 S Diablo Way
Tempe, AZ 85282
(602) 438-3000
Circle No 449

Number Nine Computer Corp
725 Concord Ave
Cambridge, MA 02138
(617) 492-0999
FAX 617-864-9329
Circle No 450

Omnicom Graphics Corp
1734 W Belt N
Houston, TX 77043
(713) 464-2990
FAX 713-827-7540
Circle No 451

Paracom Inc
Bldg 9, Unit 60
245 W Roosevelt Rd
West Chicago, IL 60185
(312) 231-0015
FAX 312-231-0345
Circle No 452

Parallax Graphics Inc
2500 Condensa St
Santa Clara, CA 95051
(408) 727-2220
FAX 408-980-5139
Circle No 453

Pixelab Inc
4513 Lincoln Ave
Suite 105
Lisle, IL 60532
(312) 960-9339
FAX 312-960-9396
Circle No 454

PsiTech
18368 Bandilier Circle
Fountain Valley, CA 92708
(714) 964-7818
FAX 714-968-7884
Circle No 455

Raster Graphics Inc
Box 5157
Bend, OR 97708
(503) 388-2584
FAX 503-388-8249
Circle No 456

Renaissance GRX Inc
Cedar Park
2265 116th Ave NE
Bellevue, WA 98004
(206) 454-8086
Circle No 457

Tadpole Technology Inc
1601 Trapelo Rd
Waltham, MA 02154
(617) 890-8898
FAX 617-890-7573
Circle No 458

Vectrix Corp
2606 Branchwood Dr
Greensboro, NC 27408
(919) 288-0520
Circle No 459

Western Digital Imaging
800 E Middlefield Rd
Mountain View, CA 94043
(415) 950-3353
FAX 415-968-1747
Circle No 460

VOTE . . .


Please also use the Information Retrieval Service card to rate this article (circle one):

High Interest 518
Medium Interest 519
Low Interest 520

TABLE 3—REPRESENTATIVE HIGH-RESOLUTION GRAPHICS BOARDS FOR MULTIBUS I AND II

MANUFACTURER/ BOARD NAME	MULTIBUS		PIXEL RESOLUTION	COLORS	GRAPHICS* PROCESSOR	MEMORY (BYTES)		PRICE	COMMENTS
	I	II				DISPLAY	PROGRAM		
LITTLE MACHINES VG-IP	✓		1024×768	16	34010	384k	4M (MAX)	\$1375-3375	
MATROX MG-1281 MMG-1281	✓	✓	1280×1024 1280×1024	256 256	34010 34010	2M-4M 2M-4M	1M 1M	\$5220 \$6495-8495	
MICRO INDUSTRIES OME 171		✓	1280×1024	256	34010	2M	1M	\$5000	
OMNICOOMP GRAPHICS CORP 2400 GDS		✓	1280×1024	256	ACRTC	1M-8M		\$13860	2-BOARD SET, GRAPHICS DATABASE MANAGER HARDWARE OPTIONAL.
RASTER GRAPHICS INC RG 653	✓		1024×768	256	34010	0.8M	0.5M	\$2595	TWO OPTIONAL OVERLAY PLANES.
RG 503		✓	1024×768	256	34010	0.8M	256k	\$3495	TWO OPTIONAL OVERLAY PLANES.

*34010=TEXAS INSTRUMENTS' TMS34010, 68020=MOTOROLA'S 68020, ACRTC=HITACHI'S HD63484.

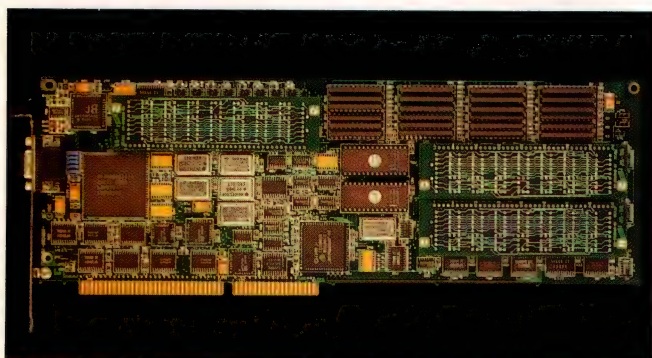

PC/AT bus 1024×768-pixel, 256-color graphics board, based on the TMS34010 graphics processor (Western Digital Imaging)

Omnicom Graphics's 8600 GDC, is the only one that boasts the new TMS34020 graphics processor. The 34020 is the next generation of the 34010 and maintains software compatibility with its predecessor. The chip has 32-bit-wide data and address buses and implements bitblits in hardware—the 34010's software bitblits were criticized by some graphics programmers as too slow. If your application requires floating-point calculations, consider the 8600 GDC's optional TMS34082 40M-flops floating-point coprocessor.

Multibus I and II have a smaller selection of boards than the other buses. (For a representative list of add-in graphics boards for Multibus I and II, see **Table 3**.) CAD/CAE demands fuel the need for more powerful systems processors and, consequently, for correspondingly powerful graphics boards. The smaller selection

of high-resolution graphics boards for Multibus I and II is due to the fact that, unlike the PC/AT bus and VMEbus, there are no workstations based on these buses to demand higher resolutions for CAD/CAE work.

Because of the probable emergence of the 8514/A as a graphics standard and the huge number of PC/AT-bus-based systems, you can expect to see the 8514/A's resolution of 1024×768 pixels become popular for VMEbus- and Multibus I- and II-based systems as well. And as the 8514/A becomes a standard, its price—as well as the price of 8514/A clones and other graphics boards with comparable resolutions—should drop.

EDN

References

1. VMEbus International Trade Association, "VMEbus Compatible Products Directory," October 1988.
2. "TMS34010 Third Party Guide," Texas Instruments, Dallas, TX, January 1989.
3. Conner, Margery, "Graphics engines," *EDN*, March 4, 1987, pg 112.

Article Interest Quotient (Circle One)
High 518 Medium 519 Low 520

ONLY ONE PLACE WE KNOW HAS A GREATER SELECTION OF MINIATURES.

Sony introduces the most complete selection of miniatures available this side of Oz.

High resolution, CCD, color and B&W OEM video cameras.

All built to perform a rainbow of tasks that include machine vision, robotics, image processing, packaging, surveillance, and more. Plus, with the lenses these cameras offer, you can focus in on an entire production facility.

Or a lion's whisker.

To get this incredible selection of OEM cameras, remember, there's no place like

Marshall. We're Sony's largest distributor. With more miniatures than anyone. Ready to ship immediately from over 40 locations nationwide. Even Kansas.



Marshall



(*Authorized Locations)

AL Huntsville (205) 881-9235*
AZ Phoenix (602) 496-0290*
Tucson (602) 790-5687*
CA Irvine (714) 458-5301*
Los Angeles (818) 407-4100*
Sacramento (916) 635-9700*
San Diego (619) 578-9600*
San Francisco (408) 942-4600*

CO Denver (303) 451-8383*
CT Connecticut (203) 265-3822*
FL Ft. Lauderdale (305) 977-4880*
Orlando (407) 767-8585*
Tampa (813) 573-1399*
GA Atlanta (404) 923-5750*
IL Chicago (312) 490-0155*
IN Indianapolis (317) 297-0483*

KS Kansas City (913) 492-3121*
Wichita (316) 264-6333*
MA Boston (508) 658-0810*
MD Maryland (301) 622-1118*
MI Michigan (313) 525-5850*
MN Minneapolis (612) 559-2211*
MO St. Louis (314) 291-4650*
NC Raleigh (919) 878-9882*

NJ N. New Jersey (201) 882-0320*
Philadelphia (609) 234-9100*
NY Binghamton (607) 798-1611*
Long Island (516) 273-2424*
Rochester (716) 235-7620*
OH Cleveland (216) 248-1788*
Dayton (513) 898-4480*
Westerville (614) 891-7580*

OR Portland (503) 644-5050*
PA Philadelphia (609) 234-9100*
Pittsburgh (412) 963-0441*
TX Austin (512) 837-1991*
Brownsville (512) 542-4589*
Dallas (214) 233-5200*
El Paso (915) 593-0706*
Houston (713) 895-9200*

San Antonio (512) 734-5100*
UT Salt Lake City (801) 485-1551*
WA Seattle (206) 486-5747*
WI Wisconsin (414) 797-8400*
In Canada: G.S. Marshall Co.
Montreal (514) 683-9440*
Ottawa (613) 564-0166*
Toronto (416) 458-8046*

We've captured the key to image capture technology
in three highly-integrated new devices.

Take a look.

Ready! Focus! Fire!

We did. And we nailed the target. Now, Brooktree is What's Hot in Image Digitizing.

We turned our D/A expertise inside out and developed the A/D front end that just might fuel the next big wave in PC and workstation demand. Simply put, we make it easy, economical and smart to add image capture capability to your system. Now.


Our focus on imaging has created a team of highly integrated devices, here today, awaiting your command.

Start with our **Bi208** flash 8-bit A/D converter. It provides the base technology for our two new Image Digi-

tizers—the **Bi251** single-channel device for gray scale applications and the **Bi253** triple-channel device for color applications.

Flexible architectures are the key. Take filtering—your favorite subject, right? We make it easy for you to use the right filter for your application, and place it anywhere in the signal path. Use multiple filters or a single filter—it's up to you.

At the back end, the programmable DACs give you complete control over your image. Video levels not exact? Want to avoid adding a video amplifier? The **Bi251** and **Bi253** digitize 0.7v to 1.2v video signals, and on-chip DACs allows adjustment of the top/bottom of the A/D reference ladder. So contrast enhancement or adjustment for different or nonstandard video levels are easily done under MPU control.

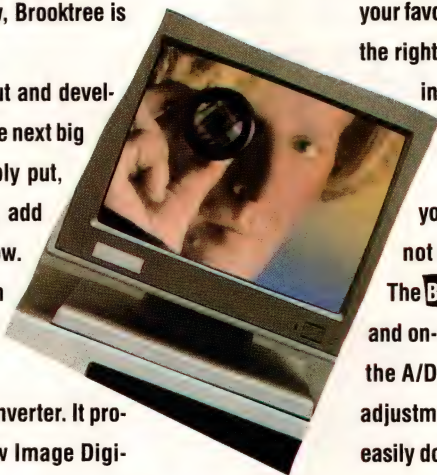

NOW

that

we've

CAPTURED

your


at-ten-tion

The **Bt251** is the monolithic CMOS single-channel, 8-bit device with the features you need. Four input video sources. Sync detection with TTL compatible sync output. DC restoration. Programmable gain/offset. 256x8 lookup table RAM for gamma correction removal, contrast enhancement or thresholding and a standard MPU interface. All in a 44-pin PLCC.

The **Bt253** is its color companion. It's a monolithic CMOS triple channel 8-bit device that digitizes three channels of video signals, generating up to 24 bits of color pixel information.

Use the Bt253 for 24, 15 or 8-bit color applications. It provides for extensive MPU control and supports two video sources. All in an 84-pin PLCC.

Couple the **Bt253** with our **Bt473** True Color RAMDAC to capture and display 8-bits each of RGB.

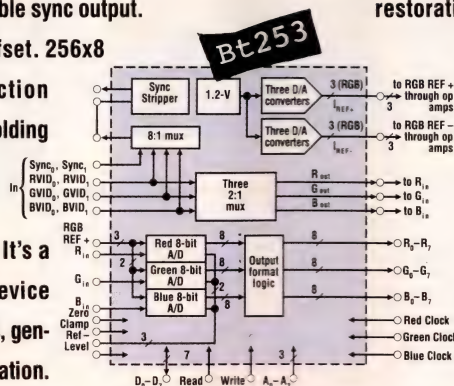

*Like
we said,
highly
integrated.*

Feeling especially creative? Our 8-bit **Bt208** is ideal for unique designs. Tailored for video, it also supports DC restoration, on-chip reference, and digitizes 0.7v to 1.2v video signals.

And that's just the beginning. Look for us to expand our building block approach to image capture—color correction, genlock solutions...

Get What's Hot. Get into Image Capture. It's Breakthrough Time again at Brooktree. And you're invited. For our FutureViewer and complete product details, call 1-800-VIDEO IC. Brooktree Corporation, 9950 Barnes Canyon Rd., San Diego, CA 92121

TLX 383 596 CIRCLE NO 75


Brooktree



Bt253
8-bit
21 pins



The μ P-to-Peripheral Connection

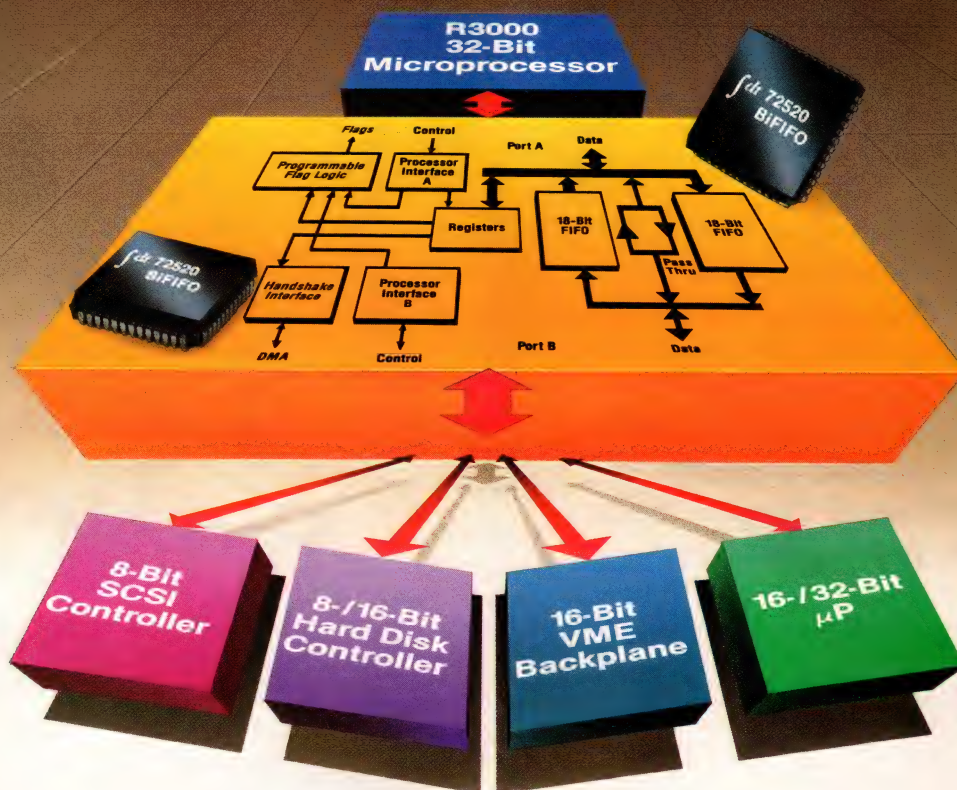

Introducing IDT's BiFIFOs

BiFIFOs bus match efficiently

Applications where a high-performance 32-bit RISC processor must talk to 8- or 16-bit peripheral controllers need IDT's new BiFIFO to minimize system chip count. IDT's bus matching bidirectional FIFOs make the ideal zero wait state connection between state-of-the-art processors and peripherals.

The BiFIFO integrates 18-bit to 9-bit bus matching logic and two full FIFO memories in one chip. Now for the first time a single chip can handle simultaneous communication in both directions. And at 35 ns the BiFIFO meets your processor performance needs.

Programmable configuration interface

Our BiFIFO has a microprocessor interface that gives you control over the BiFIFO's "personality." Ten registers configure features such as programmable flag offset, flag pin

assignment, DMA handshake, direct pass-through, and parity.

Flag offset can be programmed to any depth, giving you power over block transfer size and critical interrupts. The BiFIFO's DMA logic manages data block transfers, freeing your microprocessor for other crucial tasks. The pass-through path makes direct processor-to-peripheral command and status communication possible, eliminating external registers and reducing your board size.

Seamless interface for multiprocessing


Making two processors talk is not easy. But IDT's parallel BiFIFO makes the interface seamless, just like its bus matching brother. Multiprocessor arbitration is performed by the BiFIFO, simplifying your overall design. Since both of IDT's new BiFIFOs have the same architecture, whether you are using bus matching or parallel processing, we have the solution for you.

You can count on us

We know what you need. Call our Marketing Hotline at (408) 492-8675 to find out more about IDT's BiFIFOs. Or call (408) 492-8225 for a free copy of our 1989 Data Book Supplement with information on IDT's full range of high-performance system building blocks including RISC processors, SRAMs, multi-port and FIFO memories, standard and complex logic, and RISC subsystems and modules.

IDT, P.O. Box 58015, 3236 Scott Blvd., Santa Clara, CA 95052-8015, FAX 408-492-8674.


When cost-effective performance counts



**Integrated
Device Technology**



PHILIPS

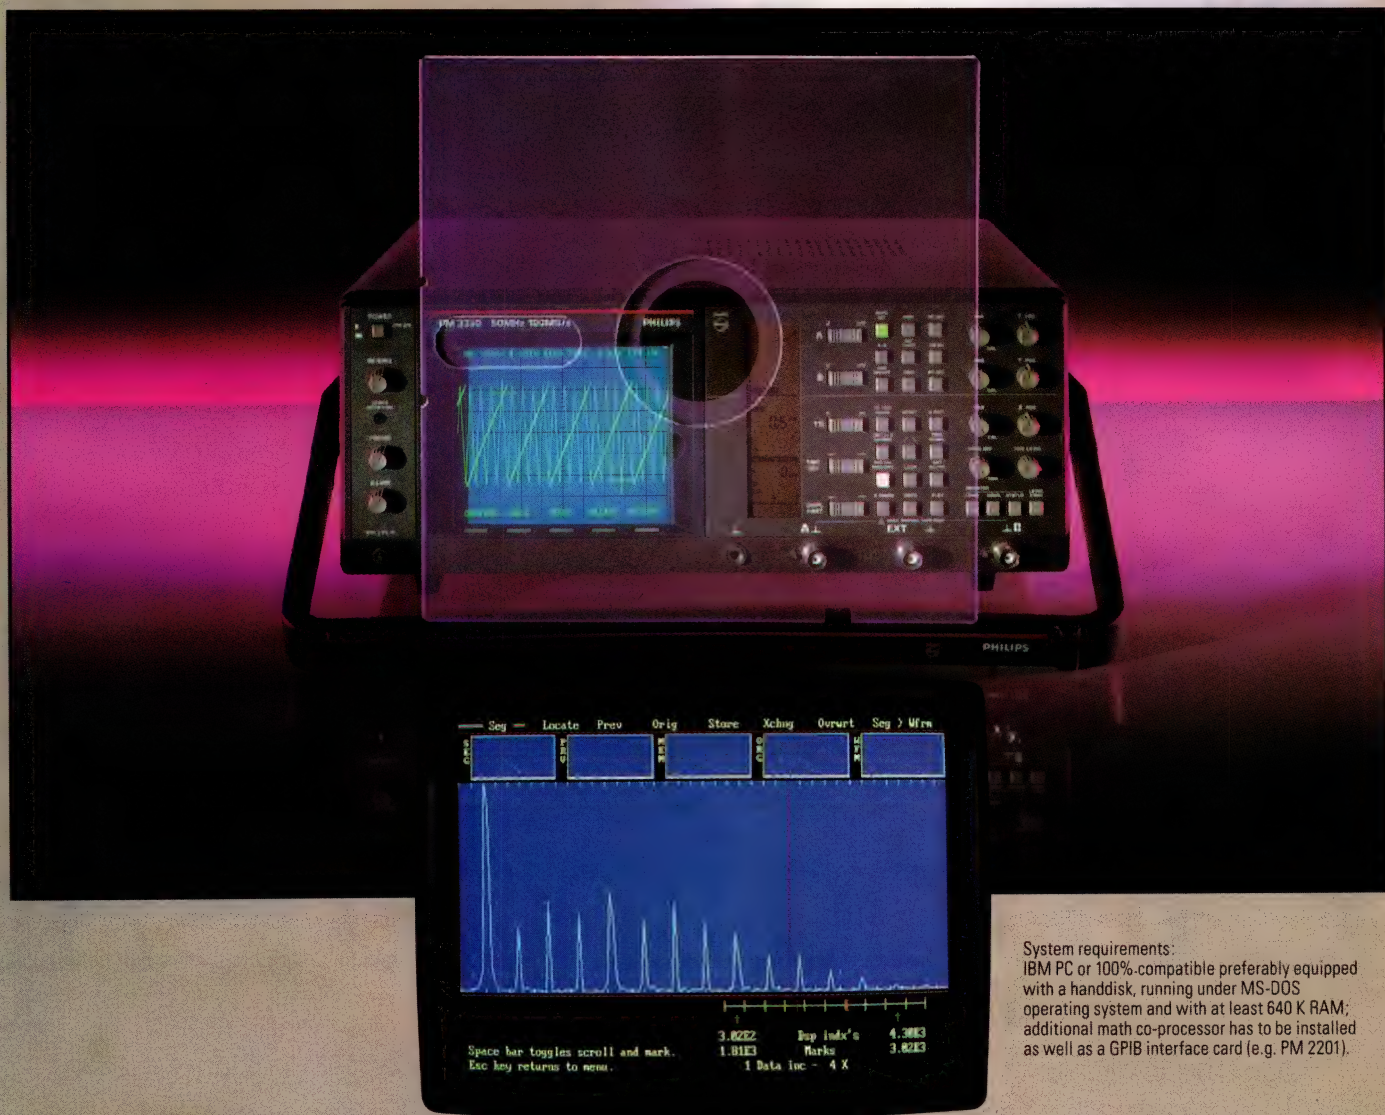

System requirements:
IBM PC or 100% compatible preferably equipped
with a harddisk, running under MS-DOS
operating system and with at least 640 K RAM;
additional math co-processor has to be installed
as well as a GPIB interface card (e.g. PM 2201).

UNPRECEDENTED DATA ANALYSIS FROM ANY PHILIPS DSO

Now, Philips offers you real data analysis power.
With an unprecedented range of graphic and analytical functions. Plus instant display of the results.

All you need is a Philips digital storage oscilloscope, your personal computer and Philips' new **PM 2260 software**. This package combines the **ASYSTANT™** scientific software with specific Philips oscilloscope drivers. So you can transfer your acquired measurement data directly from oscilloscope to PC, and perform for example an FFT-calculation.

Operation is fully menu-driven, with on-line help any time you need it. There's no need for any programming. You get full control of data presenta-

tion, with instant access to numerous high-level analytical and graphic functions (e.g. power spectrum, FFT, inverse FFT, auto and cross correlation, integration, differentiation, axonometric and contour plotting as well as normal display of data).

The PM 2260 package is a powerful tool that lets you interact simply and visually with your data. Together with a Philips digital storage oscilloscope, it's the ideal way to get the most out of your measurements. Find out more from your Philips distributor or local sales organization.

™ASYSTANT is a trademark of Asyst Software Technologies, Inc.

For further information, call your local supplier:

Austria (0222) 60101-1772, **Belgium** (02) 5256692/94, **Denmark** (01) 572222, **Finland** (0) 5026371, **France** (1) 49428080, **Germany** (561) 501466, **Great Britain** (923) 240511, **Ireland** (61) 330333, **Italy** (039) 3635240/8/9, **Netherlands** (13) 352455, **Norway*** (2) 680200, **Portugal*** (1) 2180071, **Spain** (1) 4042200, **Sweden** (8) 7031000, **Switzerland** (1) 4882390.

*For Philips products only.

For countries not listed, write to: Philips I&E, T&M Department, Building HKF, 5600 MD Eindhoven, The Netherlands.

ADVANCED TECHNOLOGY
MADE TO MEASURE



PHILIPS



Can you find the Ap

Anyone looking for the best Electronic Design Automation (EDA) solutions would undoubtedly consider Mentor Graphics, Racal Redac, Cadence or VLSI Technology. Four companies whose superior applications and powerful capabilities place them squarely at the forefront of their markets.

Likewise, when these four industry leaders went looking for the best hardware on which to develop and run their software, they chose Apollo. Discovering that our Series 3500™, Series 4500™ and Series 10000™ workstations provided ideal platforms for everything from IC layout to full system design.

What appealed to them were the same things that appeal to the thousands of engineers who've come to depend on our machines. They liked our open network-



pollo in this picture?

ing and advanced UNIX® operating system. Qualities that make it easy for developers to work together productively, allowing them to access all the information and processing power needed to get a job done.

They appreciated a complete family of compatible workstations that starts as low as \$5490. Assuring solutions to applications as familiar as simulation or as formidable as microwave design.

And they admired system administration features so efficient that even a network with hundreds of users can be managed by just one person.

As you can see, if you're looking for the perfect EDA workstation, you have lots of options. And fortunately all of them are built by Apollo.

apollo

A subsidiary of
 **HEWLETT
PACKARD**

For more information, call 1-800-323-1846 (in MA: 1-800-847-1011) or write Apollo Computer Inc., 270 Billerica Road, Chelmsford, MA 01824.
 Series 3500, Series 4500 and Series 10000 are trademarks of Apollo Computer Inc. UNIX is a registered trademark of AT&T.



DOUBLE

“...★★★★ for


AMP TBC (Twin-Beam Contact) Connectors steal the show for high-density, high-pin-count affordability. Three- and four-row versions deliver compelling performances in 32 to 540 position roles.

The twin-beam receptacle at

the heart of the TBC Connector represents the very best of AMP engineering—the greatest economy of material consistent with design excellence. It provides two-point contact (with gold-over-nickel plating), and the BeCu base assures high normal forces of 50 grams/contact (end of life minimum) for solid dependability.

There's more here than economy, though. Tightly controlled, short point-of-contact geometry allows two levels

of mating for make-first break-last sequencing of power and ground pins. The same design reduces insertion

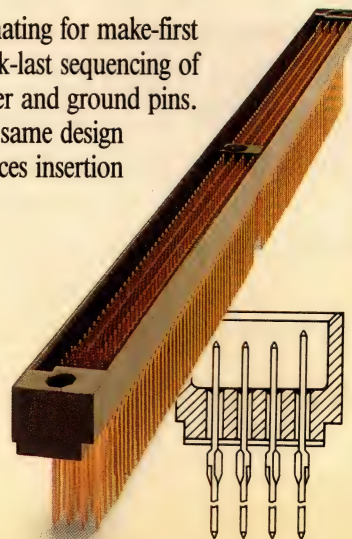

Two levels of sequenced mating allow "hot" connect/disconnect. Compliant pin option for solderless pcb insertion.



FEATURE

cost reduction."



force, and provides outstanding contact wiping action: .070" on short pins, and a minimum of .100"

on long. (Coming soon: TBC Plus Connectors, with six rows of contacts and three levels of sequencing.)

AMP TBC Connectors are fully polarized, with closed-entry design to eliminate stubbing, and they come in high-temp materials ready for vapor-phase and IR reflow soldering.

And TBC receptacle assemblies intermate with our popular AMP-HDI pin header assemblies, to give you immediate daughter card cost-reduction, without redesign.

Call 1-800-522-6752 and ask about the AMP TBC Connector Series. AMP Incorporated, Harrisburg, PA 17105-3608.

AMP Interconnecting ideas



Unique twin-beam receptacle delivers outstanding reliability in an affordable high-density connector.

One Of A Kind.

Introducing DrawingMaster™

*High resolution—
Up to 400x200 dpi.*

*No toners, pens, ribbons,
chemicals or hassles.*

*Black and
red colors.*

*High speed—
Up to 3.5 ips.*

*Quiet
operation.*

Mobility.

This one-of-a-kind raster plotter from CalComp breaks all the rules—making it our total output solution for your every design requirement.

In one word, performance. With four modes of operation to choose from, this dynamo will produce A to D size plots in no time at all.

Sharp, clean plots and unattended operation in any environment increases your productivity. Add to that shared resource plotting with a 4 to 1 mux and you've got complete versatility.

Top it off with quick installation, the reliability of virtually no moving parts, and you'll agree—it's the only one-of-a-kind you'll ever need.

With DrawingMaster also comes CalComp's 30 years of expertise, support and service, complete with an 800 helpline, which, because of the solid performance of DrawingMaster, you'll probably never need.

Like more on this no-fuss wonder?
Call 1-800-CALCOMP or write us at CalComp,
P.O. Box 3250, Anaheim, CA 92803.
In Canada, call (416) 635-9010.

**We draw on
your imagination.™**

 **CalComp**

Computers and Peripherals

Handheld, pocket-sized computer mimics IBM PC

The IBM PC-compatible Portfolio handheld computer weighs 1 lb and is the same size as a video-tape cassette. The unit, which is MS-DOS compatible, uses a 4.92-MHz 80C88 μ P. It has a 128k-byte RAM standard expandable to 640k bytes. Instead of disk drives, the unit uses credit-card sized, quick-access RAM cards that hold either 32k or 128k bytes. The unit also accepts 4M-byte ROM cards, which contain applications programs. You can exchange files with other PCs via a port or dial out over a built-in modem.

The 7.8 $\times$ 4.1 $\times$ 1.2-in. unit has a 63-key PC-like keyboard and offers an 8-line by 40-character LCD. The unit's three AA batteries last one month. The computer's built-in soft-



ware includes an editor, a Lotus 1-2-3 compatible spreadsheet, an address book with an automatic dialer, a calculator, and a time-triggered appointment reminder. Port-


folio costs \$400.

Atari Computer, 1196 Borregas Ave, Sunnyvale, CA 94086. Phone (408) 745-2000. FAX 408-745-2088.

Circle No 362

Thumb-actuated, cursor-positioning device provides 2-D axis control in a small space

Though it provides functions similar to that of a trackball or mouse, the Isopoint cursor-positioning device requires much less room and, when placed just below a conventional keyboard, allows touch typists to keep their hands near the home row. The Isopoint's design centers around a thin roller coupled to a miniature rotary-shaft encoder that provides one axis of control. You rotate the roller with your thumb or finger to produce a quadrature-output signal from the encoder. The roller rests in a sliding cradle that drives a second encoder through a

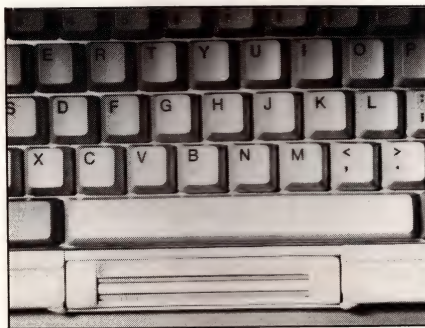

rack-and-pinion gear train. Thus, you drive the second axis by sliding the cradle back and forth, using the same thumb or finger that you use to turn the roller. The cradle rests

on a switch, so you can replicate the click of a mouse button simply by pressing down on the roller assembly.

You can get the Isopoint as an optional device for the company's line of custom keyboards. The company estimates that the Isopoint in OEM quantities would add \$30 to the cost of a keyboard.

Alps Electric (USA) Inc, 3553 N First St, San Jose, CA 95134. Phone (408) 432-6000. FAX 408-432-6035.

Circle No 363


Computers and Peripherals

Prototyping-board kits feature quasiRISC single-chip μ P

The two EVQT960 μ P-board kits contain the company's 32-bit, 20-MHz 80960KB quasiRISC processor. The kits include working CPU boards, schematics, programmable logic equations, and a debugger/monitor. The CPU boards include an onboard prototyping area and a connector.

You can choose a kit from among slightly different 80960KB-based boards. The EVQT960F20 kit costs \$1960 and includes 128k bytes of zero-wait-state static RAM and 128k bytes of flash EPROM. The board included in the \$960 EVQT960E20 kit hosts 128k bytes of 2-wait-state static RAM and sockets for 128k bytes of EPROM. The boards include a programmable wait-state generator that allows you to simulate different memory-subsystem architectures.

Other features include an RS-232C port and eight DMA channels. You power the boards with any

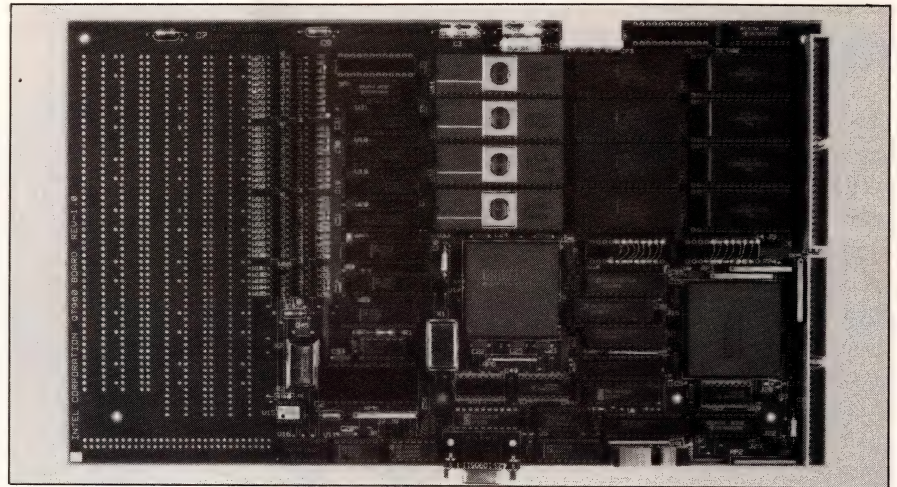

standard IBM PC power supply. The prototyping area of the boards has complete access to the μ P's buses and signals.

The boards come with the public-domain Nindy debugger/monitor in EPROM. The kits include disks that contain a schematic database of the CPU board, PLD equations, the CPU-board parts list, and

source code for the Nindy debug monitor. You also receive an EVQT960 users' manual and power-supply cables in the kit.


Intel Corp, Dept 9P01, 3065 Bowers Ave, Santa Clara, CA 95052. Phone (800) 548-4725. FAX 408-765-2633.

Circle No 364

1000-ft local-area network connects IBM PCs with 4-wire telephone cables

The Lan-Mark local-area network comprises plug-in boards for IBM PCs, 4-wire cables with RJ-11 connectors, and software. You can link up to 64 IBM PCs over a total cable length of 1000 ft. The manufacturer claims that the network runs at about one-third the effective speed of an Ethernet network.

You can continue to use the LAN even if some of the PCs are switched off. If multiple PCs attempt to read from one PC, the network will not fail. The network is interrupt driven; it does not poll. You operate the network with conventional DOS commands. For example, you can redirect DOS print-

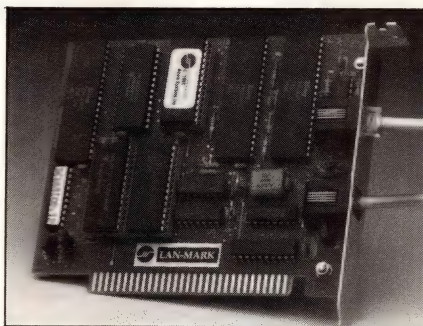

ing commands from one node on the network to another. Thus, even if you are using a program such as Lotus 1-2-3, all printouts will be sent to the remote node.

To install nodes in the network, you plug an interface card into a

PC's backplane and connect it with a telephone-type, 4-wire cable to other similarly equipped PCs. Each node on the network has control over which of its devices are accessible from the network. The network software requires DOS 3.1 or higher and occupies 32k bytes of memory.

A 2-station setup costs \$399 and includes two 25-ft cables; a 3-station setup costs \$599. Extra interface cards cost \$199.

Lan-Mark Systems, 1050-L E Duane Ave, Sunnyvale, CA 94086. Phone (408) 243-7000. FAX 408-736-2503.

Circle No 365



Radstone supplies Norden Systems (US) and Marconi Command and Control Systems (UK) with bulk storage memory units developed for the MLRS fire control computer. On time. On budget.

MIL-Spec. VMEbus

The Sure-Fire Solution To Cost and Lead-Time Problems In Military Computer Applications

Now there is a new generation of Mil-Spec computer hardware. For systems integrators with tactical computer applications who need a sure-fire solution fast, Radstone has the answer — a complete range of field-proven Mil-Spec, 32-bit VME boards.

All you need to build tomorrow's military systems today, available off-the-shelf, 68020 processors, memory and I/O modules, Multiprocessor capability. On board diagnostics. Real-time Ada and C software support. A choice of Mil-qualified system enclosures.

This total capability is designed for projects where lower development costs, shorter and more predictable timescales are important. Developed by Radstone, one of the world's largest manufacturers of VME boards with leading edge design resources to match. Built by Radstone, in a facility approved to NATO AQAP1 standards. Supported by Radstone, with 30 year's experience of military systems applications.

Call us now for your copy of the new PMV 68 MIL-STD-VME systems guide. Let us show you how we put the sure-fire solution into action.



RADSTONE
TECHNOLOGY


UK Water Lane, Towcester, Northants, NN12 7JN, (0327) 50312
USA 20 Craig Road, Montvale, NJ 07645, (201) 391-2700
France 'Miniparc' 6 avenues des Andes, 91940 Les Ulis, (1) 64 46 04 03
Germany Bahnhofstraße 38, D-6090 Rüsselsheim (061 42) 6 80 04

Computers and Peripherals

Modem board links STD Bus systems over phone lines

The model ZT 8843 modem board for STD Bus systems operates at 300, 1200, or 2400 baud. The board features automatic baud-rate sensing. The unit has automatic-dialout and -answer capabilities; it can operate in pulsed or DTMF tone-dialing modes. It has a speaker interface that you use to listen to the phone line as the board operates. Eight onboard LEDs monitor the status of calls. You connect the board to phone lines with RJ11-equipped cables.

The board is compatible with the Hayes AT command set. Thus, you can access the board from most IBM PC communications programs. The board works with 5- and 8-MHz STD Bus systems. For testing pur-

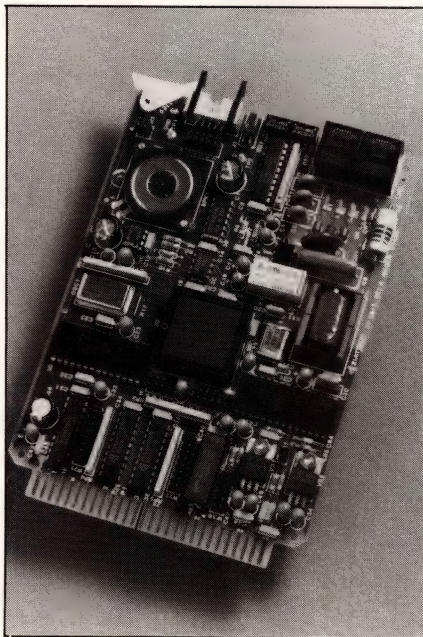

poses, it offers digital and analog loopback capabilities. It has a 256-bit nonvolatile phone-number and configuration memory. You address the board's UART as a COM1, -2, -3, or -4 device in STD Bus systems that use DOS. For those not using DOS, the UART's port can reside on any 8-port I/O boundary. The unit comes with software for communication, remote log-on, and autodialing.

The board meets all common US and international phone-company standards. The AT 8843 modem board costs \$395.


Ziatech Corp, 3433 Roberto Ct, San Luis Obispo, CA 93401. Phone (805) 541-0488. FAX 805-541-5088.

Circle No 366

SCSI tape drives back up Apple Macintosh personal computers

The MaxStream SCSI tape drives work with the Mac Plus, SE, and Mac II and IIfx. The units have capacities of 60M and 150M bytes. They can transfer data at the rate of 6.75M bytes/min. Because the drives use the company's standard recording format, other computers equipped with the company's tape drives can read data that was written by an Apple computer.

The drives fit in the space of a 5¼-in. floppy disk and use a DC600-type ¼-in. cartridge. The accompanying software allows you to back files up over LANs such as AppleShare, TPOS, 3COM, and Nov-

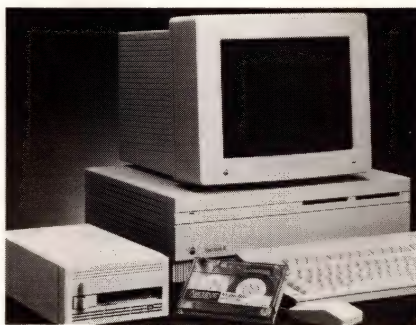

ell. You can use the drives for both manual and automatic scheduled backups. Because the company's software is compatible with Multi-Finder, you can perform backups in background mode while continuing

to use the computer.

Backup modalities include storing a complete memory image along with A/UX partitions and the boot block, file-by-file backup, or incremental backup of only the most recently updated files. The unit meets UL, CSA, FCC, and TUV safety and EMI specs. The 60M-byte drive sells for \$1395; the 150M-byte version costs \$2095.

Archive Corp, 1650 Sunflower Ave, Costa Mesa, CA 92626. Phone (714) 641-0279. FAX 714-966-5581.

Circle No 367



When ICI takes this long developing a picture, something exciting is sure to emerge.

In fact here we've produced an image from an electronic source that looks every bit as good as a photograph.

The process is called Dye Diffusion Thermal Transfer, or D2T2 for short.

The source could be a video signal,

Desktop publishing systems can now produce truly continuous tone, full color images. Business presentations will do an even better job of projecting the company image.

The more specialized applications like medical imaging, security or graphic design will find D2T2 indispensable.

Every day ICI spends \$2.5 million on

WHY DID WE TAKE 150,000 HOURS TO DEVELOP A PICTURE?

a computer, a scanner or even a remote signal over telephone lines.

From any of these D2T2 can produce a print or transparency with continuous tones in full color.

An image can emerge in as little as a minute using D2T2, and the whole procedure is clean, dry and silent.

Although this may sound like the technology of the future, it's actually available right now.

Printer manufacturers are already seeing the benefits of being able to transfer brilliant color images direct from the computer screen on to 'paper' or transparency.

research. The expertise we've acquired in colors, polymers, films and coatings has led to new ideas not just in color imaging, but in data storage as well.

Already we've developed Digital Paper, a remarkable material that offers completely flexible optical data storage.

Obviously D2T2 is a revolution no progressively minded printer manufacturer should miss out on, and for that reason ICI is very interested in talking to you.

For a complete briefing on D2T2, call Rick Lamb, at 302-886-8484, or write to us at ICI Imagedata, Concord Pike, Wilmington, DE 19897.

© ICI Americas Inc. 1989
ICI Imagedata is a part of ICI Films, a business unit of ICI Americas Inc.




Imagedata

Affordable large-format pen plotter suits desktop CAD environments

The ProPlotter produces 22×34-in. drawings on D-sized, 24×36-in. plotting media (it can also produce C-sized drawings). Acceptable plotting media include ordinary bond paper, vellum, and mylar film. The plotter accepts a variety of pen types and point sizes. Liquid-ink disposable pens having 0.25-mm to 0.70-mm point widths are typical. In addition, you can use ballpoint (roller-tip) or fiber-tip pens with appropriate plotting media.

The plotter's maximum pen speed is 7 in./sec. Resolution and repeatability are 0.004 in., which compares with the approximately 0.010-in. width of the most narrow pen

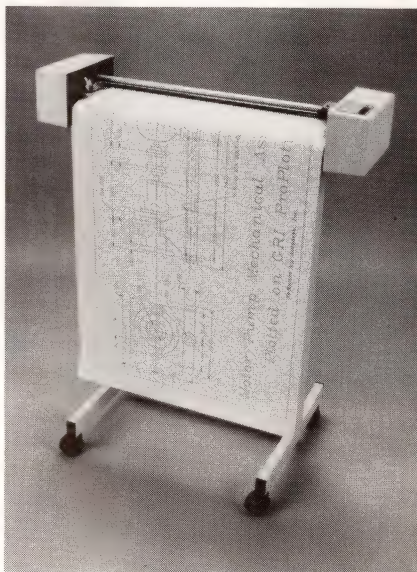

point typically used.

The plotter's mechanism uses a double set of paper-pressure rollers to maintain paper alignment. The plotter's command set is compatible with the DM/PL command set of Houston Instrument's DMP series of plotters. Thus, the unit is compatible with common desktop CAD software packages such as AutoCAD. The ProPlotter, including a casted stand, pens, and a connecting cable, costs \$1995.

Gerard Research Inc, 46745 Fremont Blvd, Fremont, CA 94538. Phone (415) 651-0217. FAX 415-651-0787.


Circle No 368

5¼-in. disk drive sports programmable SCSI interface

The MK-350 series of ESDI and SCSI 5¼-in. disk drives store 760M bytes. The SCSI version features the TAIS Virtual SCSI programmable interface. With Virtual SCSI, the company claims, you can quickly tailor the disk for a specific application.

The drives' command overhead is <500 µsec. All models have a 16-msec average access time (40 msec max) and 15M-byte/sec data-transfer rate to the disk itself. The units measure 3.25×5.75×8.00 in., weigh 6.6 lbs, and draw 4.5A of peak current (1.8A while on track) from a 12V dc supply and 1.5A from a 5V dc supply.

The Virtual SCSI feature also permits numerous other capabilities:

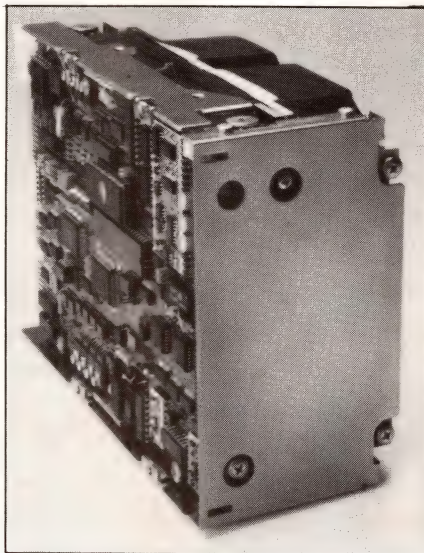

ties: a soft SCSI ID; error management; a 64k-byte cache buffer (with

parity checking) that performs read look-ahead for faster data retrieval; zero-latency read/write, buffer-ratio control for more-efficient bus utilization; 5M-byte/sec synchronous data-transfer rate; optional differential capability; and SCSI II compatibility.

The 760M-byte MK-358FA (ESDI) and MK-358FB (SCSI) cost \$2495 and \$2645, respectively, in OEM quantities; the 380M-byte MK-355FA (ESDI) and MK-355FB (SCSI) cost \$1815 and \$1965, respectively.

Toshiba America Inc, 9740 Irvine Blvd, Irvine, CA 92718. Phone (714) 583-3108.

Circle No 369

TEXAS INSTRUMENTS

A PERSPECTIVE ON DESIGN ISSUES:

Getting on and off the bus faster

IN THE ERA OF



MegaChip

TECHNOLOGIES



New bus interface ICs from TI can keep your total system up to speed.

You not only increase system throughput but cut power and conserve real estate at the same time.

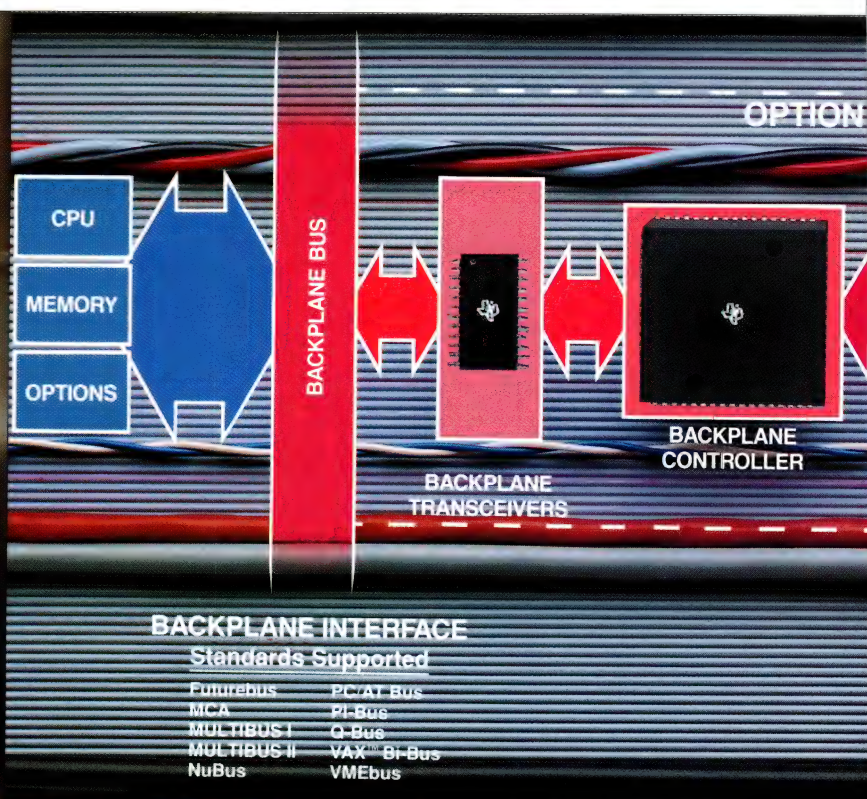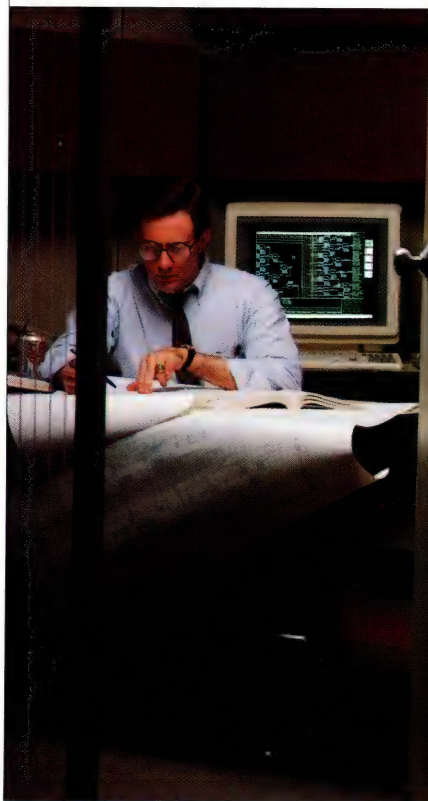

What use is a high-performance CPU if its processing power can't be delivered to the backplane and outward to the peripherals?

Typically, some system throughput is lost at the local bus interface, some at the backplane interface, and some at the peripheral bus interface.

To help you minimize such losses and maximize system throughput, Texas Instruments offers a series of innovative chips for (1) backplane interface and (2) peripheral bus interface, as well as (3) controllers to regulate data flow.

These devices support the major industry standards listed above so that you can achieve system compatibility regardless of the bus you are implementing.

High-speed, low-power implementation of backplane and peripheral interfaces for most popular standards is made possible by TI's comprehensive family of both digital and analog physical-layer

Superior backplane interface performance


To maximize system throughput, data must be able to get on and off the bus quickly. Therefore, the backplane bus transceivers must be capable of high speed and high drive.

Our high-speed/low-power BiCMOS logic (SN54/74BCTXXX)

is specifically designed for bus interface applications.


As the name implies, TI BiCMOS merges low-power CMOS with high-speed bipolar, delivering switching speeds comparable to advanced bipolar devices. You also get the 48/64-mA

BiCMOS VERSUS ADVANCED BIPOLAR

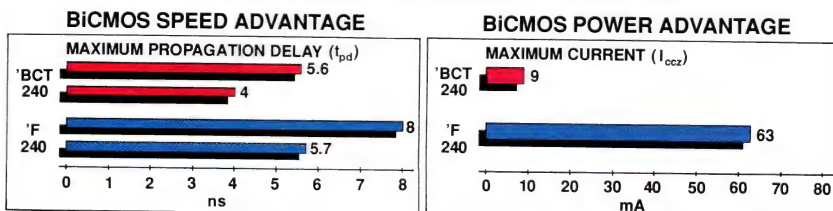

The BiCMOS lead over bipolar is proven by this comparison between TI's '74BCT240 and a comparable advanced bipolar standard device. Typical propagation delay of TI's BiCMOS part is faster (left) while power dissipation is less (right).

TI's MegaChip™ Technologies are the means by which we can help you and your company get to market faster with better, more competitive products. Our emphasis on volume manufacturing of high-density circuits is the catalyst for ongoing advances in how we design, process, and manufacture semiconductors and in how we serve our customers.

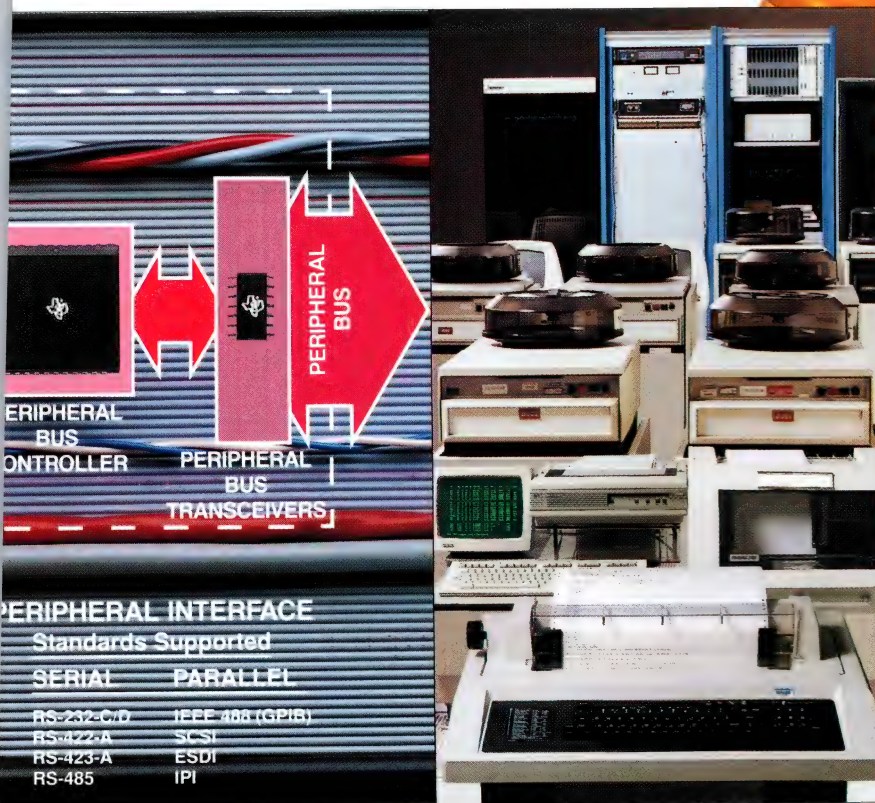

ICs. To complete the implementation, TI offers a series of innovative standard and ASIC control devices. Use of TI's leadership bus interface devices can help shorten system design cycles.

drive current you need, and total system power savings can be as high as 25% (see charts).

There are more than 60 members in our BiCMOS family, including 8-, 9-, and 10-bit latches, buffers, drivers, and transceivers. The family is also available in military versions.

Our family of octal ECL translators (SN10KHT/100KTXXXX) delivers a low-power, high-speed translator solution with 48 mA of

drive capability on the TTL side.

Our high-speed Futurebus transceiver family (SN55/75ALS-05X) includes quad and octal devices compatible with Futurebus implementations of the IEEE 896.1 standard. With a drive capability of 100 mA, a 5-ns (typ) propagation delay, and a supply current of 65 mA (max), our SN75ALS053 has the best speed/power ratio of any Futurebus transceiver on the market today. ■

High-performance peripheral interfaces

Peripheral bus interface design decisions revolve around trade-offs between line length, data rate, and noise immunity.

Where data rates are low and

line lengths are short, as with the popular RS-232-C/D standard, the major concern is power savings. However, relatively high voltages (30 V) prevent the use of standard

CMOS devices. Your answer lies with TI's Linear BiCMOS family.

Included are low-power versions of industry-standard quad drivers and receivers (SN75C188/89). Driver/receiver combinations, ranging from single to quad combinations (SN75C1154), substantially cut package count.

This BiCMOS technology will also allow us to provide charge pump circuitry for single 5-V operation.

Where data rates are high and line lengths are long, as the newer peripherals demand, noise can become a major problem. It is overcome by the use of differential drive. Typically, the major application requirement is higher speeds at, ideally, lower power.

For example, disk drives using ESDI, IPI, or SCSI interfaces will benefit from TI's SN75ALS17X devices conforming to RS-422-A and/or RS-485 standards. These chips are fabricated using our unique IMPACT™ processing that delivers up to 50% greater speed compared to competing products with as much as a 30% power reduction.

IMPACT processing is also behind the unmatched speed of our SN75AS030 RS-422 dual driver/receiver. Typical propagation delays are only 6 ns. ■

No matter which of TI's innovative devices you choose to improve speed, cut power, and reduce real estate at the media interface, the complete bus interface requires another element — controllers. For details on how TI is addressing your needs in this area, turn the page.



High-performance controllers make system design easier.

While the majority of physical-layer devices—those used to implement backplane and peripheral interfaces—transmit data, your system design also requires a device to regulate the flow of that data through the bus interface. To do the job, TI offers a series of controllers that simplify and shorten your task while cutting chip count and improving overall system throughput.

Simplified NuBus design

TI has taken much of the work out of NuBus™ design by introducing the industry's first standard NuBus interface devices. They are the SN74ACT2440 NuBus Controller and the SN74BCT2420 NuBus Registered Transceiver.

A typical implementation, using two 16-bit transceivers and one 32-bit controller (see below), replaces as many as 45 discrete devices. Compared to a discrete approach, this solution uses 60% less board space and 90% less power.

Because the necessary logic is embedded within the controller, design cycle time is reduced significantly.

A low-power UART

There is now more need than ever for low-power RS-232 interfaces. Our TL16C450 Universal Asynchronous Receiver/Transceiver (UART), made with CMOS process technology, is an excellent choice for desktop applications and is especially suited for use in laptop/battery-powered units.

A flexible SCSI controller

Available soon, our SCSI controller (designed to conform to ANSI X3.131-1986 specifications) will deliver data rates of 3 Mbytes/s (asynchronous) and 5 Mbytes/s (synchronous).

Unique byte-stacking control logic will allow interface to 16-, 24-, and 32-bit buses. The TI controller will also provide powerful multi-phase SCSI commands, including automatic handling of save-data pointer to minimize interrupts to the host processor. Dual 32-byte FIFOs will provide smooth, efficient buffering between processor and DMA ports.

Customized controllers, too

The NuBus and UART controllers

are available as part of our ASIC standard-cell library.

In addition, TI offers TGC100 Gate Arrays and TSC500 Standard Cells as part of our ASIC family which allows you to build the precise chip functions you need. ■


System complexity and the future

As systems become more and more complex, the need will emerge for combining the functionality of controllers and physical-layer devices on a single chip. To that end, TI is applying its acknowledged expertise in physical-layer devices to the design and development of such advanced control-level ICs.

System complexity also brings with it the need for simulation models to make design easier and faster. As a result, we already have simulation models available for more than 1,300 TI devices, including BiCMOS bus interface and ACL logic devices.

Another issue is the increasing difficulty and expense of testing boards in complex systems. Consequently, TI supports the JTAG/IEEE P1149.1 standard with the development of standard products and ASICs having on-chip test cells, as well as with development support software and device models on several leading workstations. ■

TI's 32-bit NuBus Interface Solution

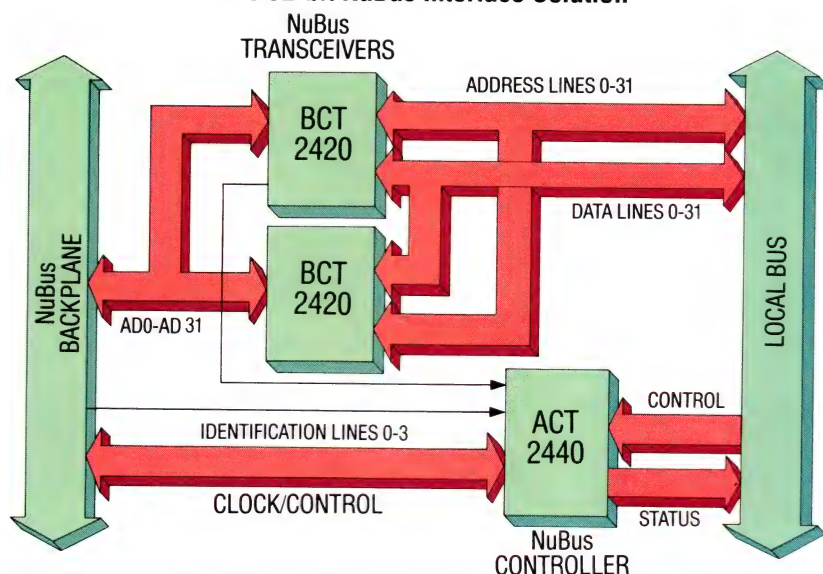

Major space savings are realized by using one TI SN74ACT2440 controller and two SN74BCT2420 transceivers to complete a full 32-bit NuBus master/slave interface. As many as 45 discrete logic devices are replaced, realizing significant reductions in board space, power consumption, and design cycle time.

Please call 1-800-232-3200, ext. 3905, for your copy of our Bus Interface Devices brochure. Or write Texas Instruments Incorporated, Dept. SSY25, P.O. Box 809066, Dallas, Texas 75380-9066.

™ MegaChip, IMPACT, and NuBus are trademarks of Texas Instruments Incorporated. VAX is a trademark of Digital Equipment Corporation.

© 1989 TI

08-8444

**TEXAS
INSTRUMENTS**

**One test equipment
leasing company
stands out in a crowd.**



So will you.

What makes us so different? It's simple. Our inventory is made up of instruments from the most respected test equipment manufacturers. Each instrument is meticulously inspected, tested, and calibrated in our metrology labs — with quality control procedures so uncompromising they exceed the National Institute of Standards and Technology requirements. And delivery is typically within 24 hours, once your order is received.

Select your equipment, then choose from a wide array of financing programs, including short-term rentals, and operating and finance leases.

Each program is custom-tailored to your situation. Or, talk to us about purchasing your equipment with terms that are convenient for you.

Our customers have counted on us for more than 26 years. Because we stand out in a crowd. And so will you. Count on us.

800-553-2255

LEASAMETRIC

Instrument Rental Division

1164 Triton Drive
Foster City, CA 94404

A member of The Marmon Group of companies

ZAX Presents The Best Way To Develop, Program, Edit, Erase, Compile, Assemble, Debug And Compute



Along with everything else shown here, we offer emulators for the following processors: 8086/88, 186/188, 80286, 80386, 8085, 8048, V20/30, V40/50, 6301, 64180, 6809, 68000, 68020, 68030. And yes, more are on the way.

If you're dissatisfied with the formidable task of trying to assemble a suitable microprocessor development system from different vendors, take heart. Now with a simple phone call, you can receive *complete support* for all your development equipment needs from one supplier—ZAX Corporation!

WHY DOES SINGLE-VENDOR SUPPORT MAKE SENSE?

When you turn your development needs over to ZAX, you're assured that all hardware and software tools were conceived, designed and tested to work together reliably and efficiently. Both with your existing system or as a completely independent development system.

That coordination results in a complete turnkey development system instead of a collection of unmatched components. (Surprising as it seems, this modular approach to design tools still costs less than dedicated systems, yet offers more flexibility!) Also, by providing a package instead of a puzzle, you end up conserv-

ing another important resource: Time. One phone call. One purchase order. One solid commitment. No headaches.

WHAT TYPE OF HARDWARE AND SOFTWARE TOOLS ARE WE TALKING ABOUT?

ZAX offers you a choice of two different powerful emulation systems with the ICD- and ERX-series emulators. Both can be interfaced to a variety of hosts (from PC to mainframe) and both offer support for a wide variety of processors. There's also our universal interface chassis, the 300i, that's capable of linking our emulators to virtually all host computers and operating systems. And speaking of computers, ZAX can provide you with a model of its own—the BOX-ER.

ZAX can also furnish an array of useful support hardware, such as a line of PLD/EPROM programmers and erasers. Our ZP-series high-speed programmers interface to your PC for a powerful combination. And the ZE-series line of EPROM erasers include everything from an indus-

trial-class, 200-chip model to the world's fastest eraser, the 5-second Quick-E II.



Chances are a broad choice of development software is paramount to your ability to work in a familiar environment. If so, ZAX is still your best source. We offer "C," Pascal, Ada, PL/M and Fortran compilers, assemblers/loaders, symbolic debuggers, source-level debuggers, and helpful menu-driven communications programs to get you up and running, fast.

Call ZAX today and get single-vendor support working for YOU! Our toll-free number is 1-800-421-0982 (800-233-9817 in CA). ZAX Corporation. 2572 White Road, Irvine, California, 92714.

In Europe, call United Kingdom: 0628 476 741,
West Germany: 02162-3798-0, France:
(03) 956-8142, Italy: (02) 688-2141.

ZAX
Zax Corporation

PUT MORE MUSCLE INTO YOUR PRODUCT...

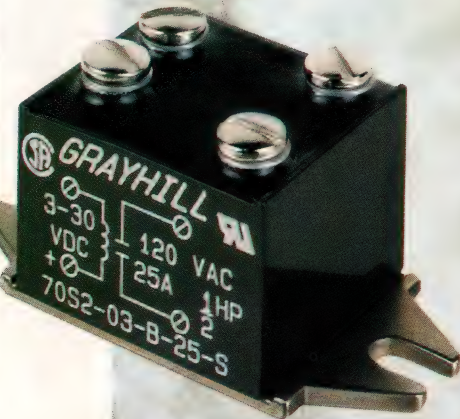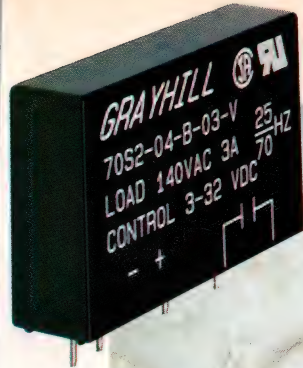


GRAYHILL SOLID STATE RELAYS PROVIDE PEAK PERFORMANCE FOR THE LIFE OF YOUR EQUIPMENT

Reliability is the Grayhill edge:

We give our solid state relays a real workout in our test lab... to demonstrate 250,000 hours MTBF under worst case conditions. We build in this kind of endurance with SMT construction, for a controlled and repeatable assembly process. This construction also allows better management of space and temperature with higher component density, excellent noise immunity, and many more reliability features.

Value is the Grayhill Commitment...

With this proven reliability, Grayhill Solid State Relays offer exceptional value. In fact, we are so confident that every standard Grayhill relay will

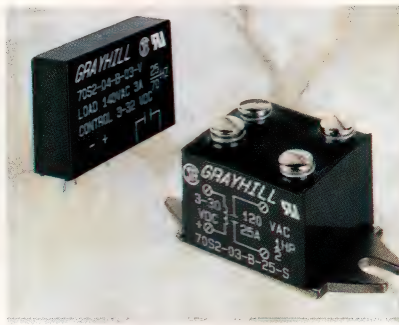

*Grayhill SIP SSR—the standard package that sets new reliability standards.
Grayhill Mini Puck SSR—half the size of a hockey puck, twice the value.*

Grayhill
INC.
At the Peak of Performance

perform for the life of the product you install it in that we make this commitment: **should one ever fail, we'll send you a new relay at no charge!**

Grayhill Solid State Relays are offered in all the most popular standard packages and ratings. They're fully described in the free Grayhill Engineering Catalog #1, and they can be ordered through your local Grayhill distributor. Want something special? Custom designs are also available.

Take the first step up to the peak. Ask us today for complete information, and a free test sample.

AVAILABLE LOCALLY THROUGH THESE REPRESENTATIVES

AUSTRALIA/NEW GUINEA Acme Electronics
Victoria • Tel: (3) 890 0900
BELGIUM/LUXEMBOURG Lemaire-Rodelco
Brussels • Tel: (2) 460-0560
CHINA, REPUBLIC OF Morihan International Corp.
Taiwan • Tel: (02) 752-2200
DENMARK Prescom A/S
Copenhagen • Tel: 532244
FINLAND OY Flinkenberg & Co., AB
Helsinki • Tel: (0) 647311

FRANCE REA Composants
Châtillon • Tel: (1) 4746-0246
GERMANY Data Modul AG
München • Tel: (011) (49) (89) 56 01 70
HONG KONG Components Agent Ltd.
Hong Kong • Tel: (0) 411-5915
INDIA Hindco Corporation
Bombay • Tel: (22) 493-1544
IRELAND, REPUBLIC OF Neitronic Ltd.
Dublin • Tel: (1) 503560

ISRAEL Boran Technologies, Ltd.
Petah Tikva • Tel: (011) (972) (3) 9345171
ITALY Microelit S.p.A.
Milan • Tel: (2) 48-17-900
Rome • Tel: (6) 88-94-323
JAPAN Japico Corp.
Tokyo • Tel: (3) 348-0611
NETHERLANDS Rodelco BV Electronics
Breda • Tel: (70) 78-4911
NEW ZEALAND S.D. Mandeno
Auckland • Tel: (9) 600-006

NORWAY Hans H. Schive A/S
Askov • Tel: (2) 90 09 00
SINGAPORE, REPUBLIC OF Microtronics Associates Ltd.
Singapore • Tel: 748-1835
SOUTH AFRICA, REPUBLIC OF Allied Elec. Components Pty. Ltd.
Dunswart • Tel: (11) 52-8661
SOUTH KOREA Unistandard Corporation
Seoul • Tel: (2) 532-6915
SPAIN Unistronics S.A.
Barcelona • Tel: (3) 321-2800
Madrid • Tel: (1) 542 52 04
Vizcaya • Tel: (4) 464-4400

SWEDEN Palmbleo Elektronik AB
Bromma • Tel: (8) 252720
SWITZERLAND Walter Blum AG
Zurich • Tel: (1) 312 68 72
UNITED KINGDOM Eurorep Ltd.
Buckden, Huntingdon, Cambridgeshire
Tel: (4808) 12323
Highland Electronics
Burgess Hill, West Sussex
Tel: (0444) 645021

CIRCLE NO 86



The next graphics processing
system you develop could
generate this image over 300 times
faster than anything around.

Make AT&T's 32-bit floating point digital signal processors the heart of your system, and make it a market leader.

On top of that, you can develop your system at a fraction of what you usually spend in time, money, and board space.

A system that can give you a commanding lead in the market for computing-intensive applications such as array processing, CAD/CAM systems and flight simulation.

A system that offers realtime graphics and image processing capabilities for filtering, transformations, hidden surface elimination, and shading.

You can build this performance into your graphics and image processing system by using AT&T's components of success.

The component of technology.

The heart of your system: AT&T's family of DSP32 products.

Our WE[®] DSP32 digital signal processor is a 32-bit DSP that's in use today in graphics, telecommunications, and speech recognition systems.

Our new CMOS DSP32C is the world's most advanced DSP—with over 400,000 transistors, and fabricated in .75 micron double-level metal technology.


The DSP32 product family offers peak performance of 25 MFLOPS of throughput. This processing power allows the implementation of sophisticated graphics algorithms with no compromise in performance.

The AT&T DSP32 family

also offers substantial developmental advantages:

Low cost/high performance: AT&T's floating point DSPs employ unique byte-addressable memory space to simplify manipulation of pixel color values. The DSP architecture incorporates high processing power, flexible I/O, on-chip memory, and clean interface to the outside world. These features reduce board space and design time and

provide a

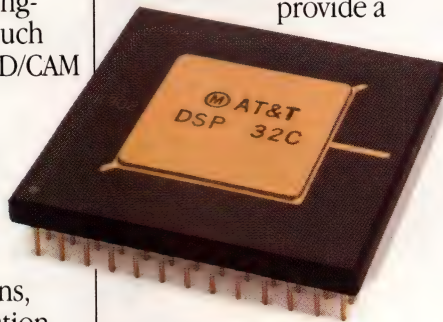

high-performance solution.

IEEE compatibility: Our DSP32C converts to IEEE P754 floating point format in one instruction. No need for special software.

Program your algorithm in C: We offer you the flexibility to program in assembly or C language. Our C compiler and optimized application library will get your application up-and-running, fast.

Software and hardware development support: We provide a full set of tools for creating, testing and de-bugging application programs. These tools run under both the MS*-DOS and UNIX[®] systems.

Note: The AT&T DSP line now also includes a new 16-bit, fixed point, CMOS device—the DSP 16A—that runs at a record 33ns, and offers more on-chip memory than any other fixed point DSP.

The component of confidence.

AT&T's extensive design support includes development

AT&T: The components of success.

tools for realtime software and hardware evaluation and de-bugging of DSP programs.

Our worldwide Field Application Engineers will answer questions as you proceed with your design. They are supported by Bell Laboratories' engineers, the designers of our DSP products.

Keep in mind, too, that AT&T offers more than 100 years of manufacturing experience—and quality and reliability standards second to none.

So, to make your next graphics processing system an applications pace-setter, and a technological success, call AT&T at 1 800 372-2447 (Canada, call 1 800 553-2448).

Image created at R/Greenberg Associates on Pixel Machines' PKM 900 Series graphics workstation, using AT&T's first generation floating point DSPs.

*Registered trademark of Microsoft Corporation.
© 1988 AT&T



AT&T

The right choice.

P.I.COTM: AN INDUSTRY TAILORED PC.

In order to consent the use of a PC architecture in the industrial field, ASEM INDUSTRIA S.p.A., with the pluriannual know-how of ASEM GROUP, makes it possible with a product based on the CMOS technology and using the EUROCARD format, maintaining a complete Software and Hardware compatibility with all the PC available on the market.


This system is completed by a rich family of I/O digital and analog boards and some emulators based on EPROM and RAM BBU boards which make available the MS-DOS 3.20 system in ROM.

Comunicare



ASEM INDUSTRIA spa - Via Nazionale, 21
33010 Reana (UDINE) ITALY - Tel. 0432/880300

P.I.COTM (PERSONAL
INDUSTRIAL COMPUTER)

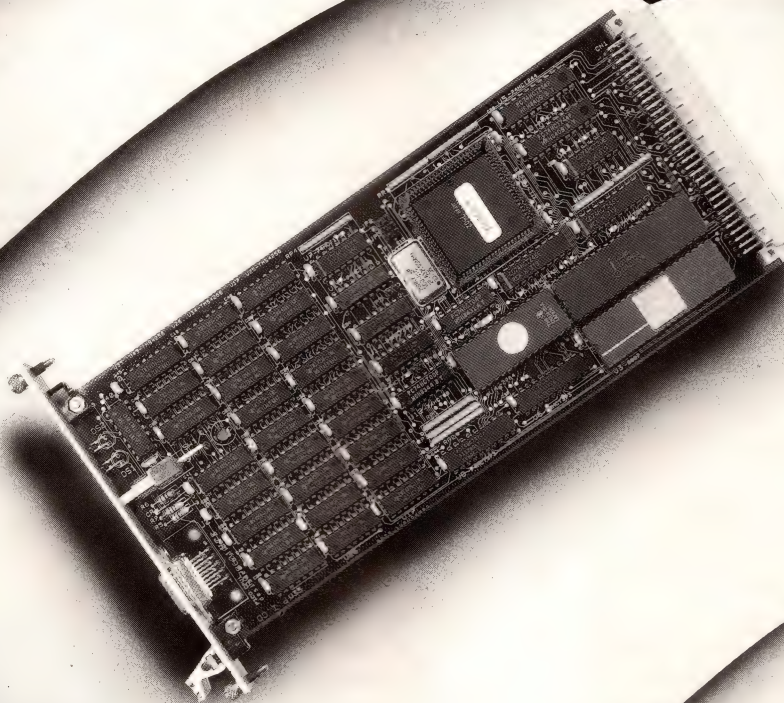

MS-DOS is a registered trade mark of Microsoft Corporation.
P.I.CO is a registered trade mark of ASEM Industria S.p.a.



PHILIPS



Testing SMD's? We can tell you how!

With an optional SMD test fixture (PM 9542 SMD) we have adapted our successful PM 6303 automatic RCL meter so you can measure modern passive components such as Surface Mounted Devices (SMD) of different size and shape.

Which makes the PM 6303 unique, because you can now measure the dominant quantity and corresponding dimension of **all** passive components.

In addition to character readout, the PM 6303's 4-digit LCD panel simultaneously displays the equivalent-circuit symbol.

So you can also instantly identify the dominant component characteristic!

A 9-parameter menu and fully automatic operation make the PM 6303 fast and easy to use, while a variety of options enhance its application flexibility.

Philips' PM 6303 - the unique RCL meter that gives you accurate measurement results of **all** passive components.



For further information, call your local supplier:

Austria (222) 60101, **Belgium** (2) 5256692/94, **Denmark** (1) 572222, **Finland** (0) 5026371, **France** (1) 49428080, **Germany** (561) 5010, **Great Britain** (223) 358866, **Ireland** (1) 952501, **Italy** (39) 3635240/8/9, **Netherlands** (13) 352455, **Norway*** (2) 680200, **Portugal*** (1) 683121, **Spain** (1) 4042200, **Sweden** (8) 7821800, **Switzerland** (1) 4882211.

*For Philips products only.


For countries not listed, write to: Philips I&E, T&M Department, Building HKF, 5600 MD Eindhoven, The Netherlands.

ADVANCED TECHNOLOGY
MADE TO MEASURE

PHILIPS



Fast SRAM and DSP Products, Duly Noted.

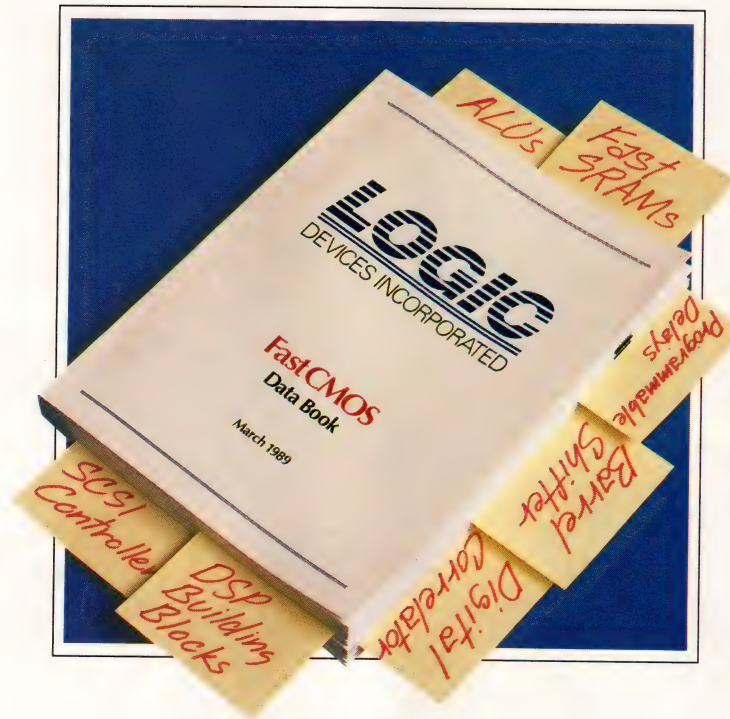

Return the coupon and get our note-worthy 428-page data book – free.

Logic Devices announces its latest anthology of technical specs on ultra-fast CMOS SRAMs, logic parts and DSP building blocks – our newest volume for high-volume specifiers. Designers will take note of its application notes and technical articles. And its information on QA, packaging and how to order. Order yours today.

Yes, please:

EDN072089

- ☐ Send me a Free Data Book
- ☐ My product interest is _____
- ☐ Have a Representative call

Fill out or attach your business card here.

Name _____

Title _____

Company _____

Address _____

City _____

State _____ Zip _____

Phone () _____ Ext. _____

Return to: Logic Devices, Inc.
628 East Evelyn Avenue, Sunnyvale, CA 94086

For faster action call:

(408) 720-8630

1-800-851-0767

In California:

1-800-233-2518

Telex:


172387

Fax:

(408) 733-7690

LOGIC
DEVICES INCORPORATED

Computers and Peripherals

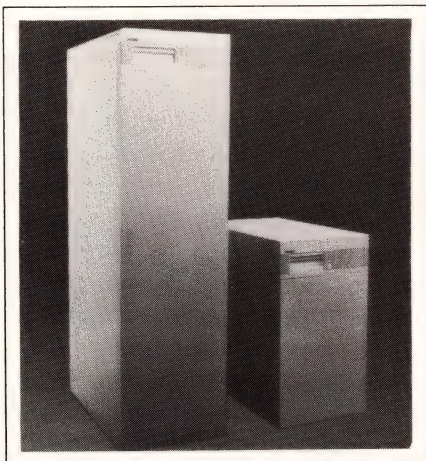

LIBRARY UNITS

The model MW-5G1-B library unit houses as many as 152 double-sided 5¼-in. WORM optical-disk cartridges. The unit has a total formatted storage capacity of 90G bytes. Sometimes called a "jukebox," the unit has a robotic arm that accesses and exchanges the cartridges in <13 sec. The smaller-version model MW-5G1-A holds as many as 56 cartridges with a total formatted capacity of 34G bytes. This version can access the cartridges in <10 sec. Each cartridge can hold as much as 300,000 pages of ASCII text. The units come with one of the company's high-speed WORM drives and provide options for additional drives. The MW-5G1-B can accommodate as many as four drives, and the MW-5G1-A can accommodate two drives. From \$31,500.

Mitsubishi Electronics America Inc., Computer Peripherals Div., 991 Knox St, Torrance, CA 90502. Phone (213) 515-3993.

Circle No 690

COPROCESSOR BOARD


The Z485 communications coprocessor board for the IBM PC, PC/AT, and compatible computers provides two asynchronous, full-duplex communications channels, operating at speeds as high as 57,600 baud. Board-jumper programming can set the output-signal level to RS-232C

or RS-485 specifications. A 9.316-MHz HD64180/Z180 μ P with 64k bytes of RAM supervises the data transfer. Options include 256k bytes of RAM and 6.144-MHz operation.

Communications between the host and the board is via a memory window that can be set to either 256 or 4096 bytes. The window base address occupies a fixed address in the PC's memory such as C4C00. The host can control the base address in 256-byte increments within the board's 256k-byte memory map. The board can interrupt the host and vice versa. A host can house multiple boards with different bus addresses. Z485-64, \$295; Z485-256, \$395.

Z-World Engineering, 1340 Covell Blvd, #101, Davis, CA 95616. Phone (916) 753-3722. FAX 916-753-3722.

Circle No 691

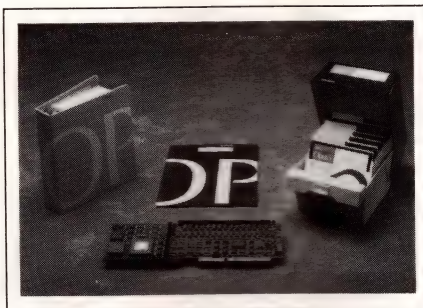

UNIX COPROCESSORS

The models 260PM and 270PM are part of the company's 200 Personal Mainframe family. The series consists of 32-bit Unix coprocessors that reside in IBM PC/XT, PC/AT, and PS/2 model 30 or 35 computers as I/O processors and subsystems for workstations and multiuser systems. The models 260PM and 270PM use National Semiconductor's 32532 μ P to provide simultaneous use of the MS-DOS and Unix System V operating systems. The 260PM operates at 25 MHz and achieves 8.5 MIPS of processing speed with 4M to 20M bytes of physical memory in a 4G-byte vir-

tual address space. The 270PM operates at 30 MHz and a similar configuration provides 10 MIPS of performance. The boards utilize the 32381 floating-point processor for single- and double-precision IEEE format calculations. Model 260PM, \$6995; model 270PM, \$7995; floating-point unit, \$895.

Opus Systems, 20863 Stevens Creek Blvd, Bldg 400, Cupertino, CA 95014. Phone (408) 446-2110.

Circle No 692



COLOR PRINTER

The 5232-Color Postscript Printer prints Adobe Postscript images and text at 300 dpi on A- or B-size paper and transparencies. There are three ink sheets available: 4-color (yellow, magenta, cyan, black); 3-color (yellow, magenta, cyan); and monochrome (black). The print controller uses a 16-MHz 68020 μ P and either 4M bytes of RAM for A-size printing or 8M bytes for B-size printing. It has 35 Adobe resident fonts in ROM and supports downloadable fonts. The printer interfaces with a host through an RS-232C/422/423 serial port or a Centronics parallel port. It can print a 3-color A-size drawing in 90 sec; a B-size drawing takes 180 sec. An internal 20M- or 80M-byte disk drive is also available. Prices range from \$16,900 to \$22,900.

Schlumberger Graphics, 385 Ravendale Dr, Box 7169, Mountain View, CA 94039. Phone (415) 964-7900. FAX 415-961-6152. TLX 491178.

Circle No 693

Computers and Peripherals



SERVO CONTROLLERS

The 800 Series single-axis, stand-alone servo motion controllers execute stored-motion profiles, having a velocity accuracy of 1 part in 8 million. You can program and command the units through an RS-232C port that connects to an IBM PC, a "dumb" terminal, or a handheld programmer. In addition, the units have 14 discrete I/O lines for programming and directing. The units can control brush or brushless ser-

vos, and they have real-time, adaptive gain control that automatically adjusts for load changes.

Other features include 1-MHz encoder input frequency, storage for eight motion profiles, digital filtering of encoder signals, velocity or torque command, and position and velocity data entry with 7-digit resolution. A variety of configurations range from a board-level unit with an integral power supply to housed units for rack or table mounting. \$1162 to \$1750.

Superior Electric Co, 383 Middle St, Bristol, CT 06010. Phone (203) 582-9561. TLX 962446. FAX 203-584-1483.


Circle No 694

SPEECH GENERATOR

The Speech Thing contains an 8-bit D/A converter that attaches to the DB-25 parallel-printer port on an

IBM PC, PC/XT, PC/AT, PS/2, or a compatible computer. It converts digitized speech or sound files into an analog signal for driving a speaker. When attached to the computer, the unit doesn't interfere with the operations of the printer. The package includes a speaker with volume control, demonstration software, and a 2-pg instruction manual. The demonstration software includes a talking calculator, a graphics-based sound editor, and several prerecorded sounds suitable for inclusion in user-written programs—all of which are recorded by the company's Voice Master PC Digitizer software. The package also includes two versions of the SmoothTalker text-to-speech software. Version 2 occupies 80k bytes of memory space in an IBM PC or a compatible computer. Version 3 has language rules that provide improved speech quality, but it re-

20X LOWER UPDATE COSTS THAN EPROMS. NO DISASSEMBLY.



Computers and Peripherals

quires an IBM PC/AT- or PS/2-compatible computer and occupies 160k bytes of memory space. You can call both versions from Basic or C programs. \$79.95.

Covox Inc, 675-D Conger St, Eugene, OR 97402. Phone (503) 342-1271. TLX 706017. FAX 503-342-1283.

Circle No 695



TRANSCEIVER


The Model 2875 bit-driver is a stand-alone, fiber-optic transceiver that's designed to replace the cable connection between wiring concentrators in an IBM token-ring LAN.

The unit provides optical isolation between concentrators and transmission capability over longer distances than cable. The maximum standard transmission is 2 km, and a 5-km option is available. The standard operating data rate is 4M bps; a 16M-bps version will be available in the near future.

To install a link you disconnect the cable connection and connect a transceiver at each wiring concentrator. You then connect the transceivers with fiber-optic cable. The front panel contains five LED status indicators for diagnostics. The LEDs indicate fiber transmission, fiber receive, test, energy or lock detection, and a wire fault. The unit measures 7.5 x 7 x 3-in. and weighs 3 lbs. \$950.

S I Tech, Box 609, Geneva, IL 60134. Phone (312) 232-8640. TLX 286177. FAX 312-232-8677.


Circle No 696

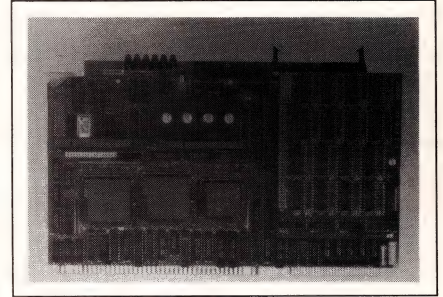

386 CPU BOARD

The ZX-386/16 single-board computer for Multibus I contains a 32-bit 80386 μ P; 2M, 4M, or 8M bytes of dual-ported RAM; 256k bytes of EPROM, and an 80387 coprocessor. The board is jumper selectable for 10-MHz asynchronous or 16-MHz synchronous operation. You can dynamically relocate memory space in increments as small as 64k bytes throughout the entire Multibus I/O memory map. In addition, the board has two RS-232C ports, two SBX connectors, and an 82380 inte-

100X THE SPEED OF DISK/DRAM. NO MOTOR.



CIRCLE NO 91

Computers and Peripherals


grated peripheral controller, which provides eight DMA channels, three programmable timers, and a 20-channel interrupt controller. An optional NCR 53C90 SCSI controller for its local bus is also available. The unit employs the company's TRU-32 bus-expansion capability, which reserves the lines on the P2 connector for full 32-bit-wide data transfers on the Multibus I. TRU-32 also expands the address range to 256M bytes. \$2195 (25). Delivery, six to eight weeks ARO.

Zendex Corp, 6700 Sierra Ln, Dublin, CA 94568. Phone (415) 828-3000.

Circle No 697

DELAY GENERATOR

The DG135 is a dual-channel digital-delay generator card for the IBM PC, PC/XT, PC/AT, and compatible computers. The card provides

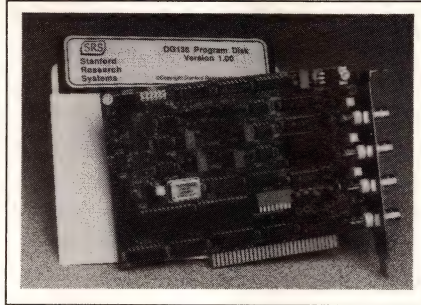

two output channels, A and B, with a delay resolution of 25 psec, a delay accuracy of 25 ppm, and a delay range of 6.5 msec. You can configure the A and B outputs to provide a gate pulse that begins with A and ends with B. The device also has a T0 output line that can be programmed in 100-nsec increments relative to an external trigger input.

The output drive levels are either TTL or ECL compatible and can drive 50Ω loads. An optional fast rise-time module provides a 100-

psec transition time on the output signals. You can use multiple cards as slaves to a common clock in order to prevent drift between channels. The half-size card consumes 7W and comes with a 90-day warranty. Software, which demonstrates the features and performance of the board, is supplied on disk. \$1075.


Stanford Research Systems Inc, 1290D Reamwood Ave, Sunnyvale, CA 94089. Phone (408) 744-9040. FAX 408-744-9049. TLX 706891.

Circle No 698


OPTICAL DRIVE

The OD112-1 rewritable optical-disk drive conforms to the ISO standards for 644M-byte drives. The 5¼-in. drive has an average access time of 75 msec and a data-burst transfer rate of 925k bytes/sec. Its companion formatter and controller module, the OF112S, provides a

4X THE DENSITY OF AN EEPROM. 1/4 THE COST. NO WEAROUT.



Computers and Peripherals

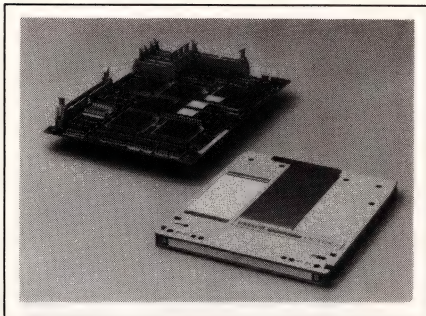

SCSI interface and a 1.5M byte/sec data-burst transfer rate. The drive uses magneto-optical recording technology. Features include read-after-write capability, data verification, a 1-msec polarity changeover, a track recording density of 16,000 tpi, a linear recording density of 24,000 bpi, and a continuous tracking servo. \$5000.

Hitachi America Ltd, Computer Div, 950 Elm Ave, San Bruno, CA 94066. Phone (415) 872-1902. FAX 415-872-1907. TLX 176308.

Circle No 699


DISPLAY CARD

The nuVista HR is a plug-in display card for the Macintosh II computer that can drive a display with 1280×960-pixel resolution. It can simultaneously display 256 colors from a palette of 16.7 million colors. A 2M-byte version of the card provides a virtual canvas of 2k×1k pixels, and a 4M-byte version provides a virtual canvas of 2k×2k pixels. The card uses the TI 34010 graphics processor for graphics manipulations. It also drives noninterlaced displays, provides square pixels, and can pan the entire video memory. It works with high-resolution monitors with 64-kHz horizontal and 60-Hz vertical frequencies, such as Sony's GDM-1953 or JVC's GD-H6020US. The board is fully compatible with Apple's QuickDraw software package. The card can accommodate an additional 2M, 4M, or 8M bytes of memory using an

optional NuVMX memory expansion module. 2M-byte version, \$3995; 4M-byte version, \$5995.

Truevision Inc, 7351 Shadeland Station, Indianapolis, IN 46256. Phone (800) 858-8783 or (317) 841-0332. FAX 317-576-7700.


Circle No 700

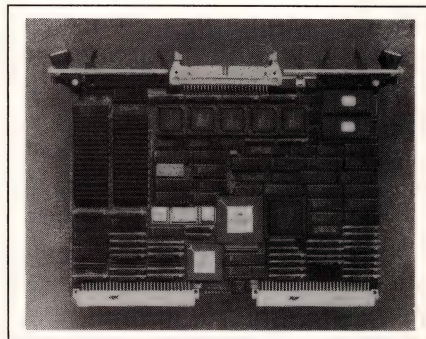

CPU BOARD

Designed for real-time embedded control applications, the HK68/V3E CPU board for VMEbus systems

4X THE DENSITY OF AN SRAM. 1/2 THE COST. NO BATTERY.

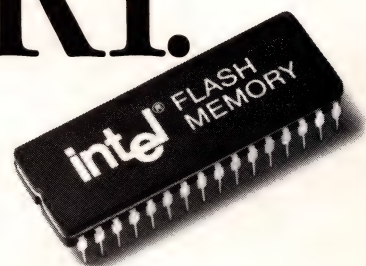

CIRCLE NO 92

Computers and Peripherals

features a 32-bit 68030 μ P; 1M, 2M, 3M, or 4M bytes of static-column dynamic RAM; and 2M bytes of EPROM. The unit is compatible with 8M-, 12M-, and 16M-byte DRAMs when they become available. A VSB Bus provides high-speed memory expansion. Other features include a SCSI controller, a 68881 or 68882 coprocessor, four RS-232C ports, four 8-bit counter/timers, a mailbox interrupt, a time-of-day clock, and a Centronics parallel port.

By combining the 68030's burst mode with static-column access, the board achieves high-speed cache refills. The board provides 128 bytes of nonvolatile memory for storing device parameters at boot time. Available software tools include the VxWorks and VADSWorks networked real-time development systems. The interface between the Unix host and the board is via Eth-


ernet, ProNet, or a common backplane using the Berkeley 4.3 BSD TCP/IP. The OS-9 operating system and the VRTX32 real-time executive is also available. HK68/V3E, \$4495; VxWorks, \$12,000; VADSWorks \$27,500; OS-9, \$1000.

Heurikon Corp, 3201 Latham Dr, Madison, WI 53713. Phone (800) 356-9602; in WI, (608) 251-8715. FAX 608-831-4249.

Circle No 701

INTERFACE BOARD


The ZT 88CT41 4-channel interface board for the STD Bus features four 82050 UARTs that operate at speeds as high as 56k baud in DTE or DCE configurations. The card provides four RS-232C channels with two of them configurable as RS-422/485 ports. The board is a TTL backplane-compatible CMOS interface with low power consump-

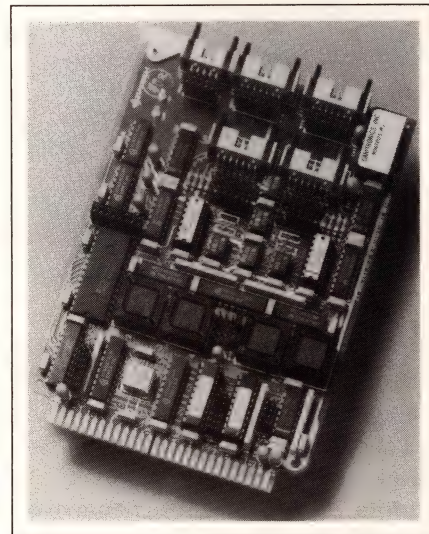

tion and an operating range from -40 to $+85^{\circ}\text{C}$.

You can use the ZT 88CT41 with either TTL or CMOS STD Bus boards. An 8259A programmable interrupt controller can operate in a slave or master configuration. An option optically isolates the RS-422/

NOW YOU CAN HAVE IT ALL. IN A FLASH.

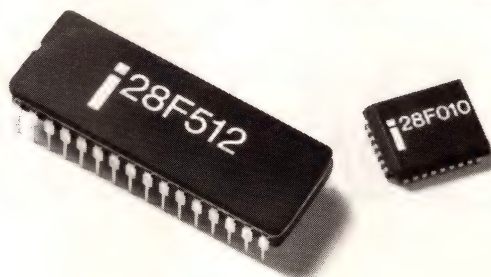

Computers and Peripherals


485 channels from the input cable. The isolation voltage is 600V. An other option provides dual, 4-byte, transmit-and-receive, FIFO buffers for each serial channel. ZT 88CT41, \$395; optical-isolation option, \$100; FIFO buffers, \$45.

Ziatech Corp, 3433 Roberto Ct, San Luis Obispo, CA 93401. Phone (805) 541-0488. TLX 4992316. FAX 805-541-5088.

Circle No 702

80386 SBC

The QPC-5142 80386 single-board computer for passive backplane systems is compatible with the IBM PC/AT and contains as much as 8M bytes of dynamic RAM in SIMMs—1M byte is standard. The board is available for either 16-, 20-, or 25-MHz clock speeds. It has an IBM PC/AT-compatible BIOS in 64k bytes of EPROM that can be

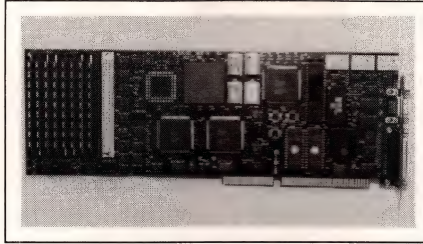

jumpered to 128k bytes for custom code. You can transfer the BIOS to RAM for faster access, using a shadow RAM feature.

Other features include a keyboard board port with a keyboard-lock feature, a clock/calendar with internal battery backup, an 8Ω speaker port, and a watchdog timer. The board provides two RS-232C ports and one parallel port. You can jumper one of the serial ports as an RS-422 port. The board also has a 68-pin socket for an optional 80387 coprocessor. The board operates from a 5V supply and consumes 14W. Boards with no memory: 16-

MHz, \$1595; 20-MHz, \$1995; 25-MHz, \$2495.

Qualogy, 1751 McCarthy Blvd, Milpitas, CA 95035. Phone (408) 434-5200. FAX 408-434-5242.


Circle No 703

SCSI ADAPTER

The SCSI-11 is a SCSI host adapter board for the VMEbus. The board's 4-bus architecture for eliminating bottlenecks, a VMEbus, a VSB Bus interface, a SCSI port, and an advanced-processor-extension (APEX) bus, accesses a quad-ported RAM that decouples the data transfer to each interface. Essentially, each bus operates independently. The board provides a master/slave interface to the VSB Bus and a high-speed DMA channel. In addition, the board uses VTC's VIC068 chip to interface to the VMEbus. The chip provides an

Intel's new Flash Memories. At first, they might sound too good to be true.

But the more you know, the better they get. Because flash gives you the

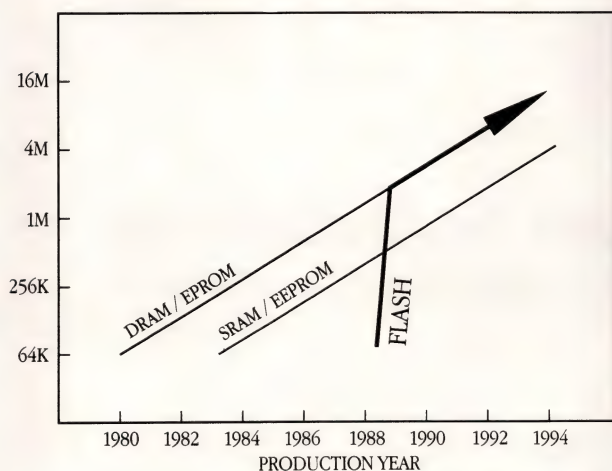

Flash Memories have overtaken EEPROMs and battery-backed SRAMs. They also give you the density of EPROMs, with rewrite capability, or the density of DRAMs with nonvolatility.

advantages of mainstream memory technologies. Without any of the drawbacks.

In one chip, you get high density.

Read/write capability. Random access. And nonvolatility. All at the lowest system cost.

In fact, Intel's new 28F010 and 28F512 Flash Memories offer so much that they give you a powerful new alternative to EEPROMs. EPROMs. Battery-backed SRAMs. And disk/DRAM combinations. Whether you compare them on performance. On price. Or on reliability.

No matter how you look at it, this is a memory solution you should learn more about. Before your competition does. So call (800) 548-4725, Lit. Dept. #6A14. And we'll send you everything you need to know. In a flash.

intel®

©1989 Intel Corporation.

CIRCLE NO 93

Computers and Peripherals

independent DMA channel to the VMEbus. The APEX bus provides 32-bit access to the μ P. A selection of PEX and APEX modules are available for more functionality such as IEEE-488 and parallel I/O interfaces. \$2195. Delivery, 90 days ARO.

Radstone Technology, 20 Craig Rd, Montvale, NJ 07645. Phone (800) 368-2738; in NJ, (201) 391-2700.

Circle No 704

INDUSTRIAL PC

The DataTough 286 industrial computer is based on an 8-MHz 80286 μ P. A base unit contains 1M byte of RAM, a 720k-byte, 3 $\frac{1}{2}$ -in. floppy-disk drive, a 20M-byte hard disk, two serial ports, one parallel port, three available 16-bit slots, a travel-sealed keyboard, and a monochrome monitor capable of

720 $\times$ 348-pixel resolution. The unit can operate over a 32 to 131°F range in humidity levels of 5 to 95%. In addition, the unit can withstand shocks as high as 10g during operation. The unit is built with heavy-gauge aluminum, and all openings are sealed with gaskets. The keyboard is made of a contaminant-resistant membrane. The computer measures 11 $\times$ 21 $\times$ 18 in. and weighs 65 lbs. \$4950.

Cimpoint, 1807 W Braker Lane, Suite S, Austin, TX 78758. Phone (800) 622-2993; in TX, (512) 837-3707.

Circle No 705

VME CPU BOARD

The MVME143 single-board computer for the VME Bus features a 68030 μ P with three versions: 16.7, 20, and 25 MHz. The board also contains a 68882 floating-point copro-

cessor operating at the same speed as the CPU. The board has 4M bytes of dynamic RAM and four 28-pin sockets for ROM, EPROM, or EEPROM. Using a Z8530 serial communications controller, the board provides two multiprotocol serial ports; it also has an RS-232C debug port on the front panel, using the MC68901 multifunction peripheral (MFP) chip. The MFP also provides four 8-bit timers. An MC68230 parallel interface/timer IC supplies a 24-bit timer that can generate autovectorized interrupt to the CPU on level 4. Mostek's MK48T02 provides a battery-backed real-time clock and 2k bytes of battery-backed static RAM. \$2995.

Motorola Microcomputer Div, Marcom Dept, DW283, 2900 S Diablo Way, Tempe, AZ 85282. Phone (800) 556-1234, ext 230; in CA, (800) 441-2345, ext 230.

Circle No 706

Replace metal can oscillators!
WITH COST EFFECTIVE AUTO-INSERTABLE EPSON PLASTIC OSCILLATORS

High speed EPSON auto-insertable SG-51 CMOS Plastic DIP Crystal Oscillators fit the same hole pattern as metal can oscillators...and they are better:

- **Cost Effective Auto Insertable.**
No Hand Placement or Lead Trimming.
- **Fast Rise and Fall Times**
5 nanoseconds TYP
- **Tri-State Output.**
- **Low Power Consumption.**
- **Good Symmetry**
45/55% TYP
- **Improved Shock and Vibration Characteristics.**
- **Available from 1.50 MHz to 55 MHz.**

SPECIFICATIONS
CMOS Crystal Oscillator SG-51 Series
Input Voltage: 5V $\pm$ 0.5V
Access Time: 8 nsec MAX, 5 nsec TYP
Frequency Stability: C = $\pm$ 100 ppm
Duty: 40/60% symmetry, 45/55% TYP
Current Consumption: 18mA MAX, 10 mA TYP at 12 MHz

Call your sales rep today.

EPSON **EPSON AMERICA, INC.**
Component Sales Department Telephone: 213/373-9511

EPSON Sales Representatives: AL-GA-TN-NC The Novus Group 205/534-0044 • CA-No. Costar 408/446-9339 • CA-So. Bager Electronics 714/957-3367 • CO-UT Wn. Region Mktg. 303/469-8088 • FL Dyne-A-Mark 305/771-6501 • IL-WI LTD Technologies 312/773-2900 • IN-KY C C Electro 317/255-1508 • IA-MO-IA Microtronics 913/262-1444 • MA-NH-CT Rosen Assoc. 617/449-4700 • MD-VA Tech. Sales Assoc. 301/461-7802 • NJ JMR Sales 201/254-8484 • NY Elcom Sales 716/385-1400 • OH-MI J. D. Babb Assoc. 216/323-7081 • OR-WA E. E. Sales 503/639-3978 • PA Omega Sales 215/947-4135 • TX-OK Component Tech. 214/783-8831

A scope so good you have to see it.

© 1989 Hewlett-Packard Co. TM001912F



Unequaled value in a 100 MHz Digitizing Oscilloscope. The HP 54501A.

- 100 MHz bandwidth
- Four channels
- 8-bit vertical resolution
- Instant hardcopy output
- Full HP-IB programmability
- Automatic measurements

Call your local sales office
to see the best price/performance,
portable, digitizing oscilloscope

on the market. You'll see the power
of glitch, dropout and TV trigger-
ing, measurement limit test and
dual timebase windowing. The
HP 54501A outperforms analog
oscilloscopes and delivers extra
capabilities found only in expen-
sive digitizing oscilloscopes.
See the ease and versatility
of the HP 54501A.

See the HP 54501A in action.

Contact your local HP sales office
for more information.



**HEWLETT
PACKARD**



COMPUTER-AIDED ENGINEERING

Mixed analog-digital simulators

are picking up speed

Doug Conner, Regional Editor

Whether you need a simulator for chip-level, board-level, or system-level design, products to meet your needs are beginning to proliferate.

Because even those systems that are mostly digital start or end in the analog world, you'll need both analog and digital simulation capability to simulate your entire system. Until recently, most designers approached this problem by either avoiding simulation altogether or by using separate analog and digital simulators and hoping that the interface would work. Now, however, you can use mixed-signal simulators that not only accurately simulate the analog and digital portions of a circuit, but also successfully span the interface between them.


If you're designing a mixed-signal ASIC, it's even more urgent to perform mixed-signal simulation. Without full simulation you run the risk of ending up with an ASIC that does everything it was supposed to do but has to be redesigned because the rest of the system doesn't behave the way you thought it would.

Surprises that show up after you have silicon are seldom pleasant.

The traditional simulation method, using separate analog and digital simulators and segregating the circuit appropriately for simulation, speeds up the digital simulation but causes some problems. First of all, because the interface between the analog and digital portions of the circuit is not simulated, you have to be very careful to connect the analog and digital sections perfectly. No simulator can verify your connections.

For example, if you connect data lines incorrectly to an A/D converter after a successful simulation of the analog and digital portions of a circuit, all your effort will be wasted, especially if the circuit is an ASIC. That is admittedly a foolish mistake, but the last engineer to make it has yet to be born. A true mixed-signal simulator lets you verify the entire circuit, including

TBC1948.1(SQM) C-17"x22" 6:15

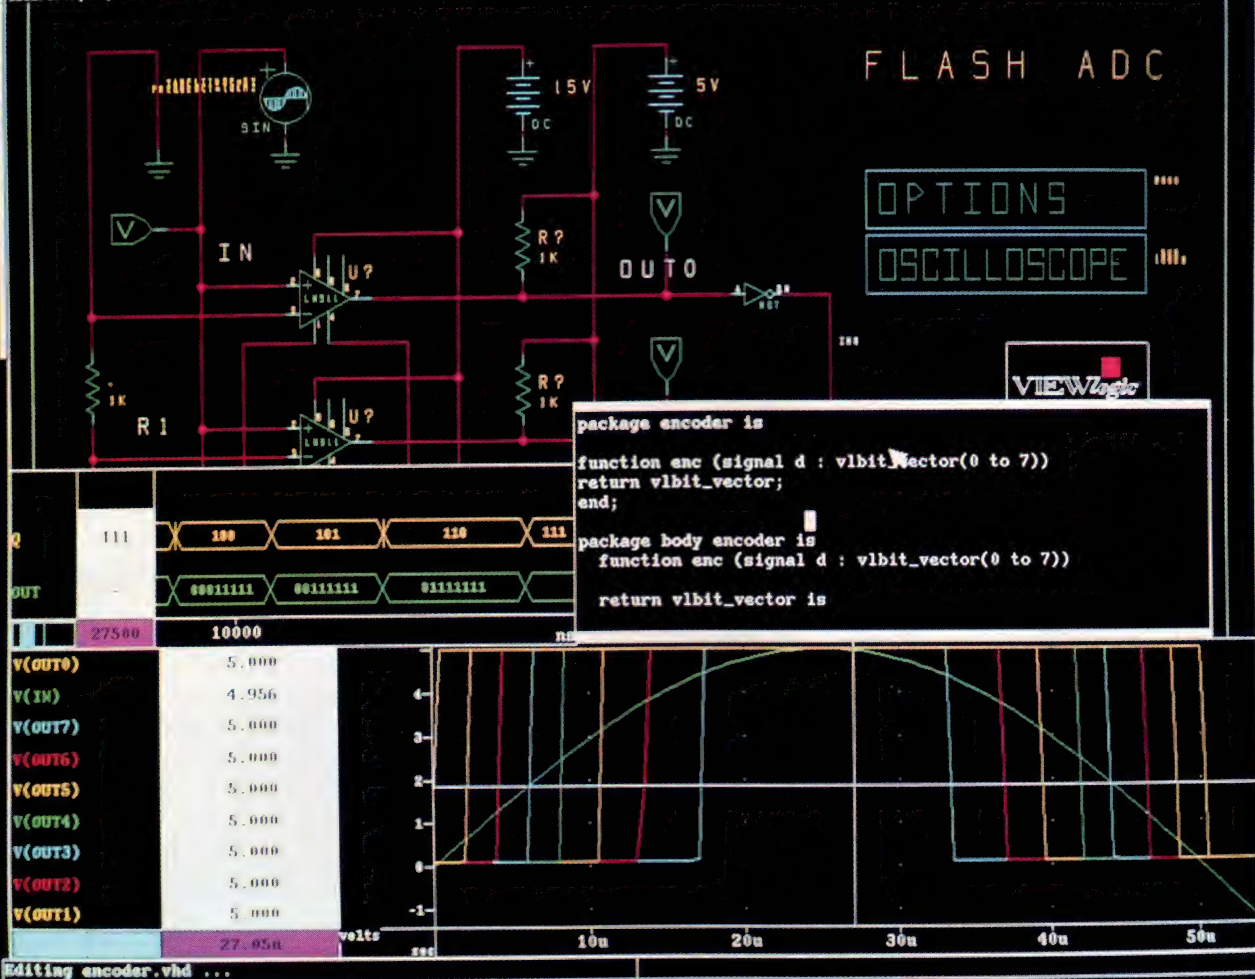

feedback paths between the analog and digital blocks.

Another situation where separate simulations are inadequate is in cases where there is a feedback link between analog and digital circuits. For example, in motor or engine control where you have analog sense or drive circuits and the control equations are implemented digitally, you're going to have a difficult time simulating the system without mixed-signal simulation. You can't break up the analog and

digital sections and have an effective simulation of your control loop.

These problems notwithstanding, separate analog and digital simulation does have some advantages, one of which being that most designers can find analog and digital simulators that fit their needs. At present, trying to find a mixed-signal simulator that combines the features you need from both analog and digital simulators is still difficult because the choices are few.

Before comparing particular

Viewsim A/D combines the Viewsim digital simulator with the PSpice analog simulator (Viewlogic Inc)

It's important to simulate the entire circuit board containing an ASIC, or better still, the entire system.

mixed-signal simulators, it's important to know what to look for. Mixed-signal simulators typically comprise separate analog and digital simulators that run in unison. These separate simulators need the net list split into analog and digital sections before they can run the simulation. A tightly integrated combination of the two simulators will handle the net list split internally. A looser gluing of the two simulators may leave the net list split to be performed by the user. The separate analog and digital simulators operate independently except when an analog input to a digital device crosses a threshold or a digital input to an analog device changes state.

Communications between the digital and analog simulators is made difficult by the fact that most analog simulators work in time steps that are independent of the event-driven time steps of a digital simulator. To get the best simulation speed, you need to let both simulators work with their optimum time steps. When data needs to be exchanged between simulators, time must be synchronized.


Interface models between analog and digital

Another problem that must be solved is the interface between analog and digital models. In the analog simulator, you need more information on the source and load of digital circuits than you need in the digital simulator. You also need to resolve digital output states and strengths, including high-impedance states. Generally, you need special device models that translate data between the analog and digital simulators.

You have several options when choosing a mixed-signal simulator. One is to simulate the entire circuit with a low-level circuit simulator such as Spice. Because simulation of digital circuits on a low-level simulator is slow in comparison with digital simulation, using Spice is only practical with circuits containing very few digital circuits.

On the other hand, analog simulation is typically the bottleneck when it comes to mixed-signal simulation, though it depends on the ratio of analog elements to digital elements in a design. Despite this, Spice and some other low-level circuit simulators are often on the receiving end of bad press. Two more points should be mentioned regarding Spice.

First, although Spice certainly isn't fast, execution time does not increase with the square of the circuit size, as some marketing literature would have you believe. Spice simulation time is consumed by model evaluations and matrix equations. Model evaluations

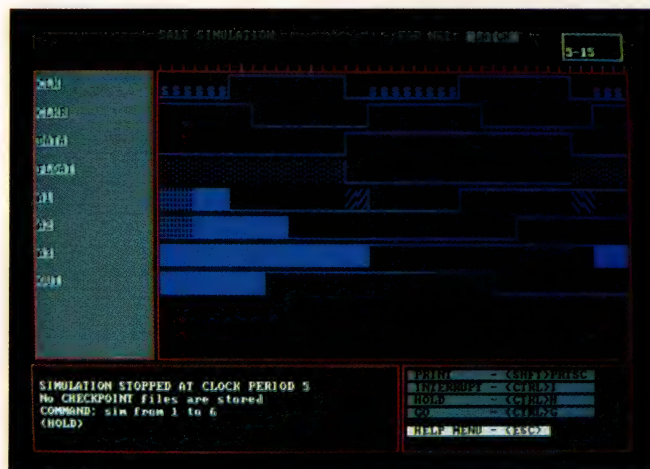

The SALT simulator (Cad Group Inc)

increase approximately linearly with circuit size and matrix equations increase exponentially, but with an exponent of around 1.2. If every element in a circuit were connected with all others the exponent would be two, but this does not happen in actual circuit design.

The second problem, convergence, also is not quite as bad as it is usually made out to be. Quotes on convergence problems are normally in reference to an unrefined version of Spice 2G. Every major vendor of Spice derivatives has refined Spice models to minimize these convergence problems. This isn't to say that convergence problems don't exist, but any simulator that solves differential equations to simulate circuits has to deal with the inherent realities of mathematics when solving them.

Accuracy takes time

If you want the simulation accuracy provided by Spice or other low-level circuit simulators, you usually have to pay the price of significant amounts of time spent in simulations. But there is an alternative. You can sacrifice some of the accuracy of low-level circuit simulators for speed. One approach is to use behavioral simulation.

The concept of behavioral simulation is simple. Model a device or block of circuitry as a black box. At the system level, it isn't necessary to model everything that happens in a circuit, just how the outputs respond to the inputs. In contrast, a low-level circuit simulator such as a Spice tries to replicate the functions of every component in a circuit.

The power of behavioral modeling is not in replacing

TABLE 1—REPRESENTATIVE MIXED-SIGNAL SIMULATORS

MANUFACTURER	PRODUCT	PRICE	COMPUTER PLATFORMS
ANALOGY	SABER	\$20,000	APOLLO, SUN, DEC VAX
ANALOGY/HHB	SABER/CADAT	\$49,000	APOLLO, SUN, DEC VAX
CAD GROUP	SALT	\$3500	APOLLO, SUN, DEC VAX, IBM PC/XT/AT, PS/2, MAINFRAMES ²
MICROSIM	PSPICE	\$4950	APOLLO, SUN, DEC VAX, IBM PC/XT/AT, PS/2, APPLE MACINTOSH II
NCR	DESIGNSIM A/D	\$64,000	APOLLO, SUN, DEC VAX
SIERRA SEMICONDUCTOR	MONTAGE	\$29,500 ¹	SUN (APOLLO 3RD QUARTER 1989)
SILICON COMPILER SYSTEMS	LSIM	\$25,000	APOLLO, SUN, DEC VAX
VIEWLOGIC	VIEWSIM A/D	\$25,000	SUN, DEC VAX

NOTES: 1. \$19,500 WITH LSIM

2. ALLIANT, CDC CYBER, CREY, ELXSI

low-level transistor models but in replacing groups of models, such as op amps and even higher-level blocks. These higher-level behavioral models of analog blocks can speed simulation significantly.

One important advantage of obtaining faster simulation of circuits is the ability to use the simulator as a real design tool, allowing you to try different design tradeoffs and to check the feasibility of different approaches. When simulation runs too slowly, it becomes nothing more than a verification tool.

Behavioral modeling also adapts well to the hierarchical approach of circuit simulation. You can make a behavioral model to simulate the actions of any size of circuit. Using a top-down design methodology, you can simulate a system before the actual system is designed in detail. Each behavioral model can be broken down into sub-models before simulating the detailed circuit design.

Once the detailed circuit has been designed and simulated in a low-level circuit simulation, the blocks can be replaced with behavioral models that describe more accurately how each circuit block will function.

For all their good points, however, behavioral models also have some problems. The simplifications that are often made in making a behavioral model restrict your use of the model. If you use a behavioral model in an unexpected way or look for behavior it was not made to simulate, you might obtain erroneous results. Ideally, when models are made the proper checks are built into them, but that isn't necessarily the case. Analog circuits can be legitimately used in many and sometimes bizarre ways.

One-thousand times faster than Spice

Every mixed-signal simulator in Table 1 lets you use behavioral models to simulate analog circuits. The Montage simulator from Sierra Semiconductor is unique in that it is intended *only* for behavioral simulation. Montage uses detailed analog behavioral models that integrate tightly with the digital simulator. Sierra Semiconductor claims Montage runs at least 1000 times


faster than Spice, yet is accurate enough that the company guarantees that any ASIC you design with Montage will work when they build it.

Several things probably allow the company to make this guarantee. Montage is intended only for ASIC design. Sierra Semiconductor has a library of about 300 analog and digital cells for which it has written detailed behavioral models. It has tight control over the building blocks you use in your design, and the simulator includes extensive error checking to make sure you use the models as intended.

Don't forget board-level simulation

Having a mixed-signal simulator developed by the ASIC vendor to be compatible with their IC process is ideal from the standpoint of developing ASICs. Possibly the only disadvantage of this approach is that this simulator is only appropriate for ASIC design. If you want to simulate the ASIC in a board-level application, you'll have to turn to another simulator.

If you like the idea of Montage but still want to have access to Spice simulation of circuits, there is a

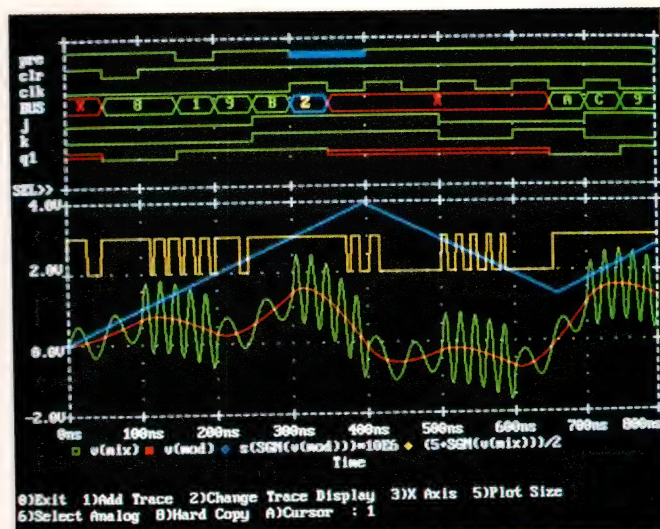

PSpice includes a 28-state logic simulator (Microsim Corp)


Surprises that show up after you have silicon are seldom pleasant.

solution. Montage is actually based on the Lsim product from Silicon Compiler Systems, a full mixed-signal simulator in its own right. Montage uses the digital simulator within Lsim but Sierra Semiconductor has developed the analog portion of Montage independently.

Lsim includes an interface to HSpice from Meta-Software (Campbell, CA) in addition to analog behavioral modeling. As with other mixed-signal simulators, Lsim lets you simulate some blocks with Spice and others behaviorally. Lsim also lets you use what Silicon Compiler Systems calls multimode simulation, which lets you switch between high-level and low-level models at critical times during a simulation. Lsim's digital simulator includes switch-level, gate-level, and behavioral-level simulation, plus serial and statistical fault simulators. It is intended primarily for IC simulation.

Two simulators that address both the chip-level and board-level simulation problem are PSpice from Microsim and Saber from Analogy. Though these simulators are intended primarily as analog simulators, both have built-in digital simulation capability that is adequate for limited digital simulation. However, the built-in digital simulators are not quite as versatile as dedicated digital simulators. For example, neither of them supports fault simulation, a feature you expect to find with true dedicated digital simulators.


Though PSpice and Saber have considerable overlap in their capabilities, they are totally different packages. PSpice, as the name implies, is a Spice-based simulator. Saber has low-level circuit simulation capa-

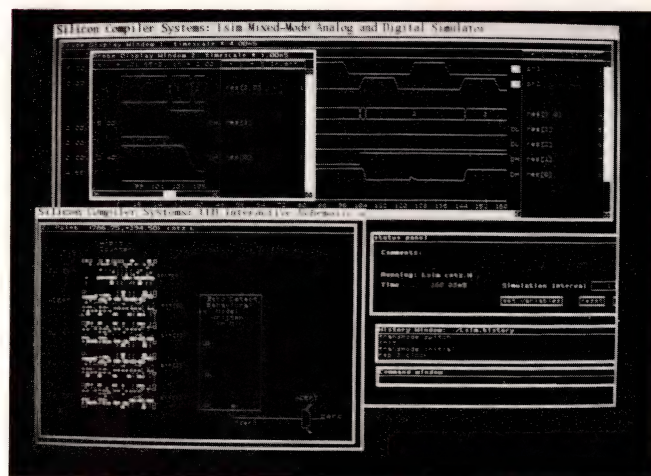


Lsim provides mixed-signal simulation chip- and system-level designs (Silicon Compiler Systems)

bilities similar to Spice, but is completely different from Spice. For example, whereas Spice has models built in to the simulator, Saber has its own modeling language with models separate from the simulator. Both simulators accept Spice models and have extensive libraries of models; both provide software to assist you in developing your own models.

For mixed-signal simulation of circuits requiring more sophisticated digital simulation, both PSpice and Saber have been paired with digital simulators. PSpice has been integrated with Viewlogic's Viewsim and also supports HHB's CADAT simulator. Saber has been teamed with CADAT and is working on interfaces to

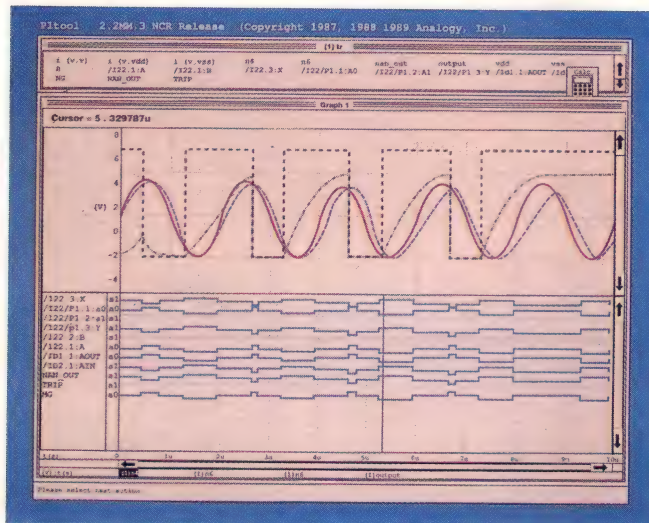

DesignSim A/D uses Saber/CADAT combination (NCR Corp)

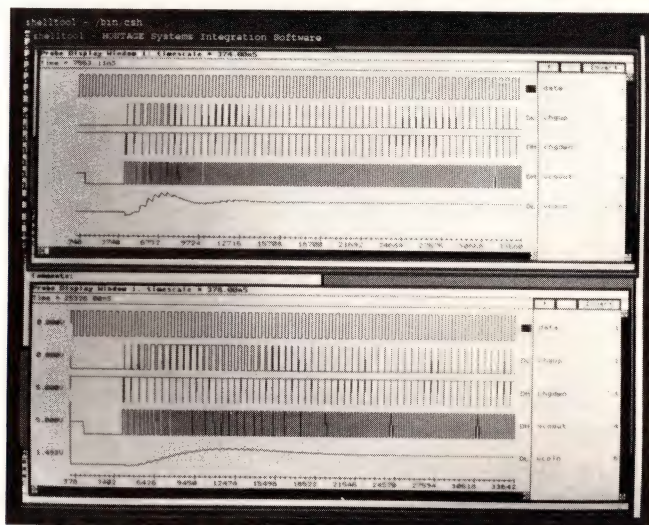

Montage's speed lets you perform design tradeoffs quickly (Sierra Semiconductor)

Signetics 68070

Moto dives into RISC chip pool

NEW YORK—Motorola finally takes its plunge into the RISC pool today as it announces its long-awaited 68070 chip set. More

chip from a semiconductor manufacturer to find a place in the computer and workstation world. Major system companies are pushing the RISC theme with own architectures, shutting the door on standard products

Advanced Micro Devices positions its 29K for the embedded micro market

AMD, with its new 29000 microprocessor, probably the most recent addition to the microprocessor family.

80286

the 80286 chip in many machines, particularly lower-end machines. They also expect the huge market to be replaced by the 80386 chip. But the 80286 chip is still a major player in the market.

Intel unveils long-awaited 80386SX microprocessor control chip

Intel Corp. of Santa Clara unveiled on Thursday its long-anticipated 'P-9' computer chip, which will create less expensive personal computer systems that run more sophisticated software.

Introduction of the new 80386SX chip, which analysts say eventually will supplant Intel's widely used 80286 chip as the "brain" of certain IBM PC and compatible computers, essentially is a marketing move that allows computer makers to offer lower-cost alternatives in their high-powered 80386-based product line.

For example, prices of computers—like the IBM 80286—range from \$4,500. Systems based like the IBM Model 5150 start at \$4,995.

The 80386SX chip—start at \$4,995. The software of the chip is all the software of the 80286, although more slow. The new chip also will run 8086 software, Intel said. While analysts said they expected

Although National Semiconductor's NS32332 microprocessor has a dedicated math coprocessor (the NS32331), its 1-MFLOPS floating-point calculation speed is deemed too slow for many tasks. To meet speed demands, National came up with the NS32380, a dedicated coprocessor-control chip that ties Weitek's WTL3164 fast floating-point data path in the 32-bit 32332 microprocessor. The combination yields a peak floating-point performance of 15 MFLOPS for single- and double-precision tasks.

Now, what about the other 95% of your design?

Signetics We've got the guts!

It takes more than a microprocessor to improve product performance.

At Signetics, we haven't developed proprietary MPUs. Instead we've concentrated on the other 95% of your system. We call it "the guts."

That's why we're known as your dependable, worldwide supplier of quality ICs. Producers of devices that are processed with leading-edge technology and supported with customer-oriented service.

We provide everything essential to the total performance of your design. And we make it easy for you to get it. From one vendor. In less time. With less paperwork. For less cost.

We're Signetics. We've got the guts! Make us prove it. Call (800) 227-1817, ext. 982D and ask for our new capabilities brochure.

© 1988 NAPC

Signetics

Philips Components



PHILIPS


Separate simulators are inadequate in cases where there is a feedback loop between analog and digital circuits.

Gateway's Verilog (Westford, MA) and GenRad's HiLo (Milpitas, CA).

Viewlogic's Viewsim A/D product integrates PSpice with its Viewsim digital simulator to provide a powerful simulator capable of low-level circuit simulation through high-level system simulation of mixed-signal circuits.

Another case of integrating two packages under one roof is DesignSim A/D from NCR, which has taken the Saber/CADAT combination and integrated it to fit the company's needs. The Spice models NCR had previously been using were translated for Saber. DesignSim A/D can take advantage of all the models available for board-level simulation as well as the models NCR has developed for its ASIC process. As a result, you can simulate systems, boards, or ICs all on the same simulator. An additional benefit is realized by having a single company provide the digital simulator, analog simulator, and foundry.

Another mixed-signal simulator approach is the

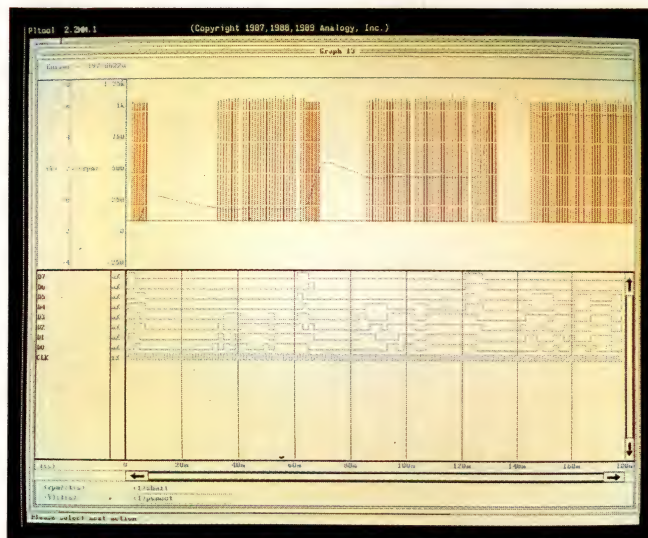

Saber includes a native mixed-signal capability (Analogy Inc)

For more information . . .

For more information on the mixed-signal simulators discussed in this article, circle the appropriate numbers on the Information Retrieval Service card or use EDN's Express Request service. When you contact any of the following manufacturers directly, please let them know you saw their products in EDN.

Analogy Inc
Box 1669
Beaverton, OR 97075
(503) 626-9700
FAX 503-643-3361
Circle No 420

Cad Group Inc
3911 Portola Dr
Santa Cruz, CA 95062
(408) 475-5800
Circle No 421

HHB System
1000 Wyckoff Ave
Mahwah, NJ 07430
(201) 848-8000
Circle No 422

Microsim Corp
20 Fairbanks
Irvine, CA 92718
(714) 770-3022
TLX 265154
Circle No 423

NCR Corp
Microelectronics Div
2001 Danfield Ct
Fort Collins, CO 80525
(303) 226-9550
(800) 334-5454
Circle No 424

Sierra Semiconductor
2045 N Capitol Ave
San Jose, CA 95132
(408) 263-9300
FAX 408-263-3337
Circle No 425

Silicon Compiler Systems
2045 Hamilton Ave
San Jose, CA 95125
(408) 371-2900
FAX 408-559-4916
Circle No 426

Viewlogic Systems Inc
313 Boston Post Rd W
Marlboro, MA 01752
(508) 480-0881
FAX 508-480-0882
Circle No 427

SALT simulator from Cad Group. SALT uses an analog simulator that is less accurate but faster than Spice. The accuracy of a Spice simulation is often much greater than you can measure in a real circuit. Cad Group has tried to reach what they feel is a better balance than Spice has between speed and accuracy.

SALT also has features to speed up other parts of the simulation process. For example, SALT uses an incremental compiler so that circuit or model changes made between runs can be performed quickly. This simulator saves the state of the simulation as often as you'd like during execution so that you can restart the simulation from any point rather than having to start from the beginning.

SALT also offers features to help you troubleshoot circuit problems after the simulator has uncovered them. For example, a feature called traceback lets you determine all the sources driving a node, helping you spot errors when multiple sources are driving a bus line.


If you need a mixed-signal simulator you have several alternatives immediately available. By the end of this year you can expect products from every major electronic design automation company that isn't currently offering any. Many companies are working on new solutions to mixed-signal problems, not just re-packaging products that are already available. **EDN**

Article Interest Quotient (Circle One)
High 497 Medium 498 Low 499

"Vroom!"

Turbocharge your memory for zero wait state design with Signetics fast 7.5ns PAL[®]-type devices.

Vroom! Now you can get the zero wait state performance that will allow memory to keep pace with the new ultra-fast microprocessors. And you won't have to pay top price for your memory to do it!



7.5ns PAL-type device improves system performance.

Vroom! Boost system speed, lower memory cost. Signetics offers the fastest (7.5ns) PAL-type devices for high-speed decoding. Now you can design with slower, less expensive, more available memory devices and still enhance system speed. And all Signetics PLDs are easily supported by ABEL, CUPL or our powerful AMAZE design software.

7.5ns 20-pin		7.5ns 24-pin	
PLUS16L8-7	PLUS16R6-7	PLUS20L8-7	PLUS20R6-7
PLUS16R4-7	PLUS16R8-7	PLUS20R4-7	PLUS20R8-7

Vroom! We've got the guts! That's right, we have those essential PLDs you need to improve total system performance. Programmable Macro Logic, Logic Arrays, Logic Sequencers and our PAL-type products that cut system cost while boosting system speed.

Turbocharge your memory now! Call Signetics at (800) 227-1817, ext. 985D, for a free High-Speed Decoder Handbook. For surface mount and military product availability, contact your local Signetics sales office.

PAL is a trademark of AMD/MMI. ©1988 NAPC

Signetics

Philips Components



PHILIPS




Think of it. Building the first laptop computer with the speed and graphics of a high-end workstation. Now imagine taking it from design to manufacturing in months, instead of years.

ASIC is the only way to do it. And LSI Logic is the only logical choice.

With an ASIC Design Methodology and in-depth support to help you design more ASIC devices across the board: on-chip RISC microprocessors, logic, A/D conversion, cache memory, everything.

It's what sets us apart from other ASIC companies: an end-to-end solution that combines the highest quality development tools with state-of-the-art IC fabrication technologies.

Like our Modular Design Environment™ software, with more than 400 complex

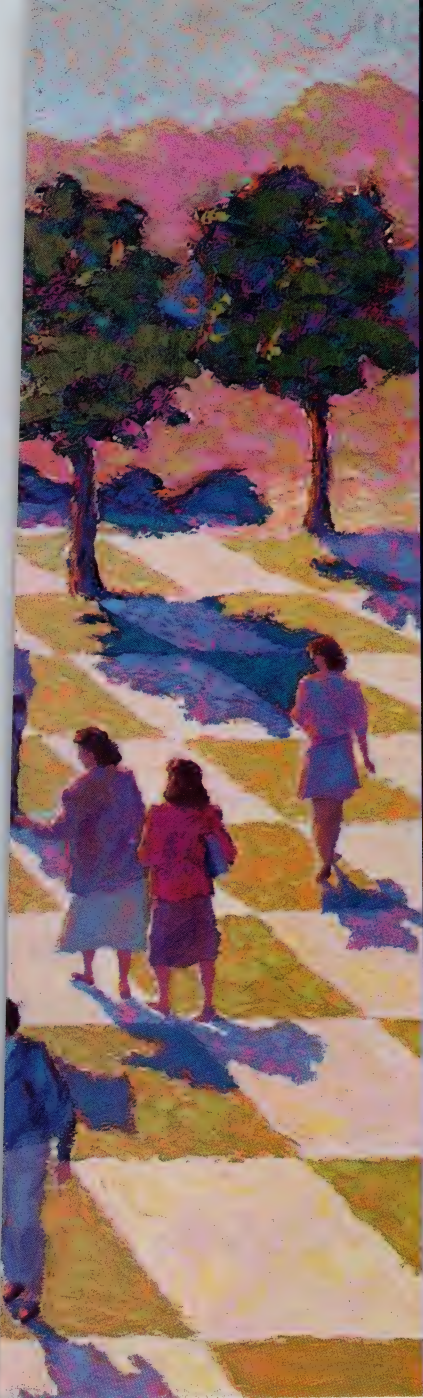

ASIC ACROSS THE BOARD.


building blocks containing accurate and fully functional timing models. You'll save time and money by performing complete simulations of your whole system before committing to silicon.

And our advanced technologies that can replace hundreds of standard devices with a single ASIC device: 0.7-micron technologies with up to 200,000 useable gates; Channel-Free™ array and cell-based architectures in CMOS or BiCMOS; integrated RISC technologies; three-layer metal; and plastic packaging so advanced you can specify up to 524 pins.

LSI Logic's ASIC Design Methodology. It's more than just a practical approach to system design. It's why we outperform other ASIC companies where it matters most. Across the board.

LSI LOGIC®

ACROSS THE BOARD

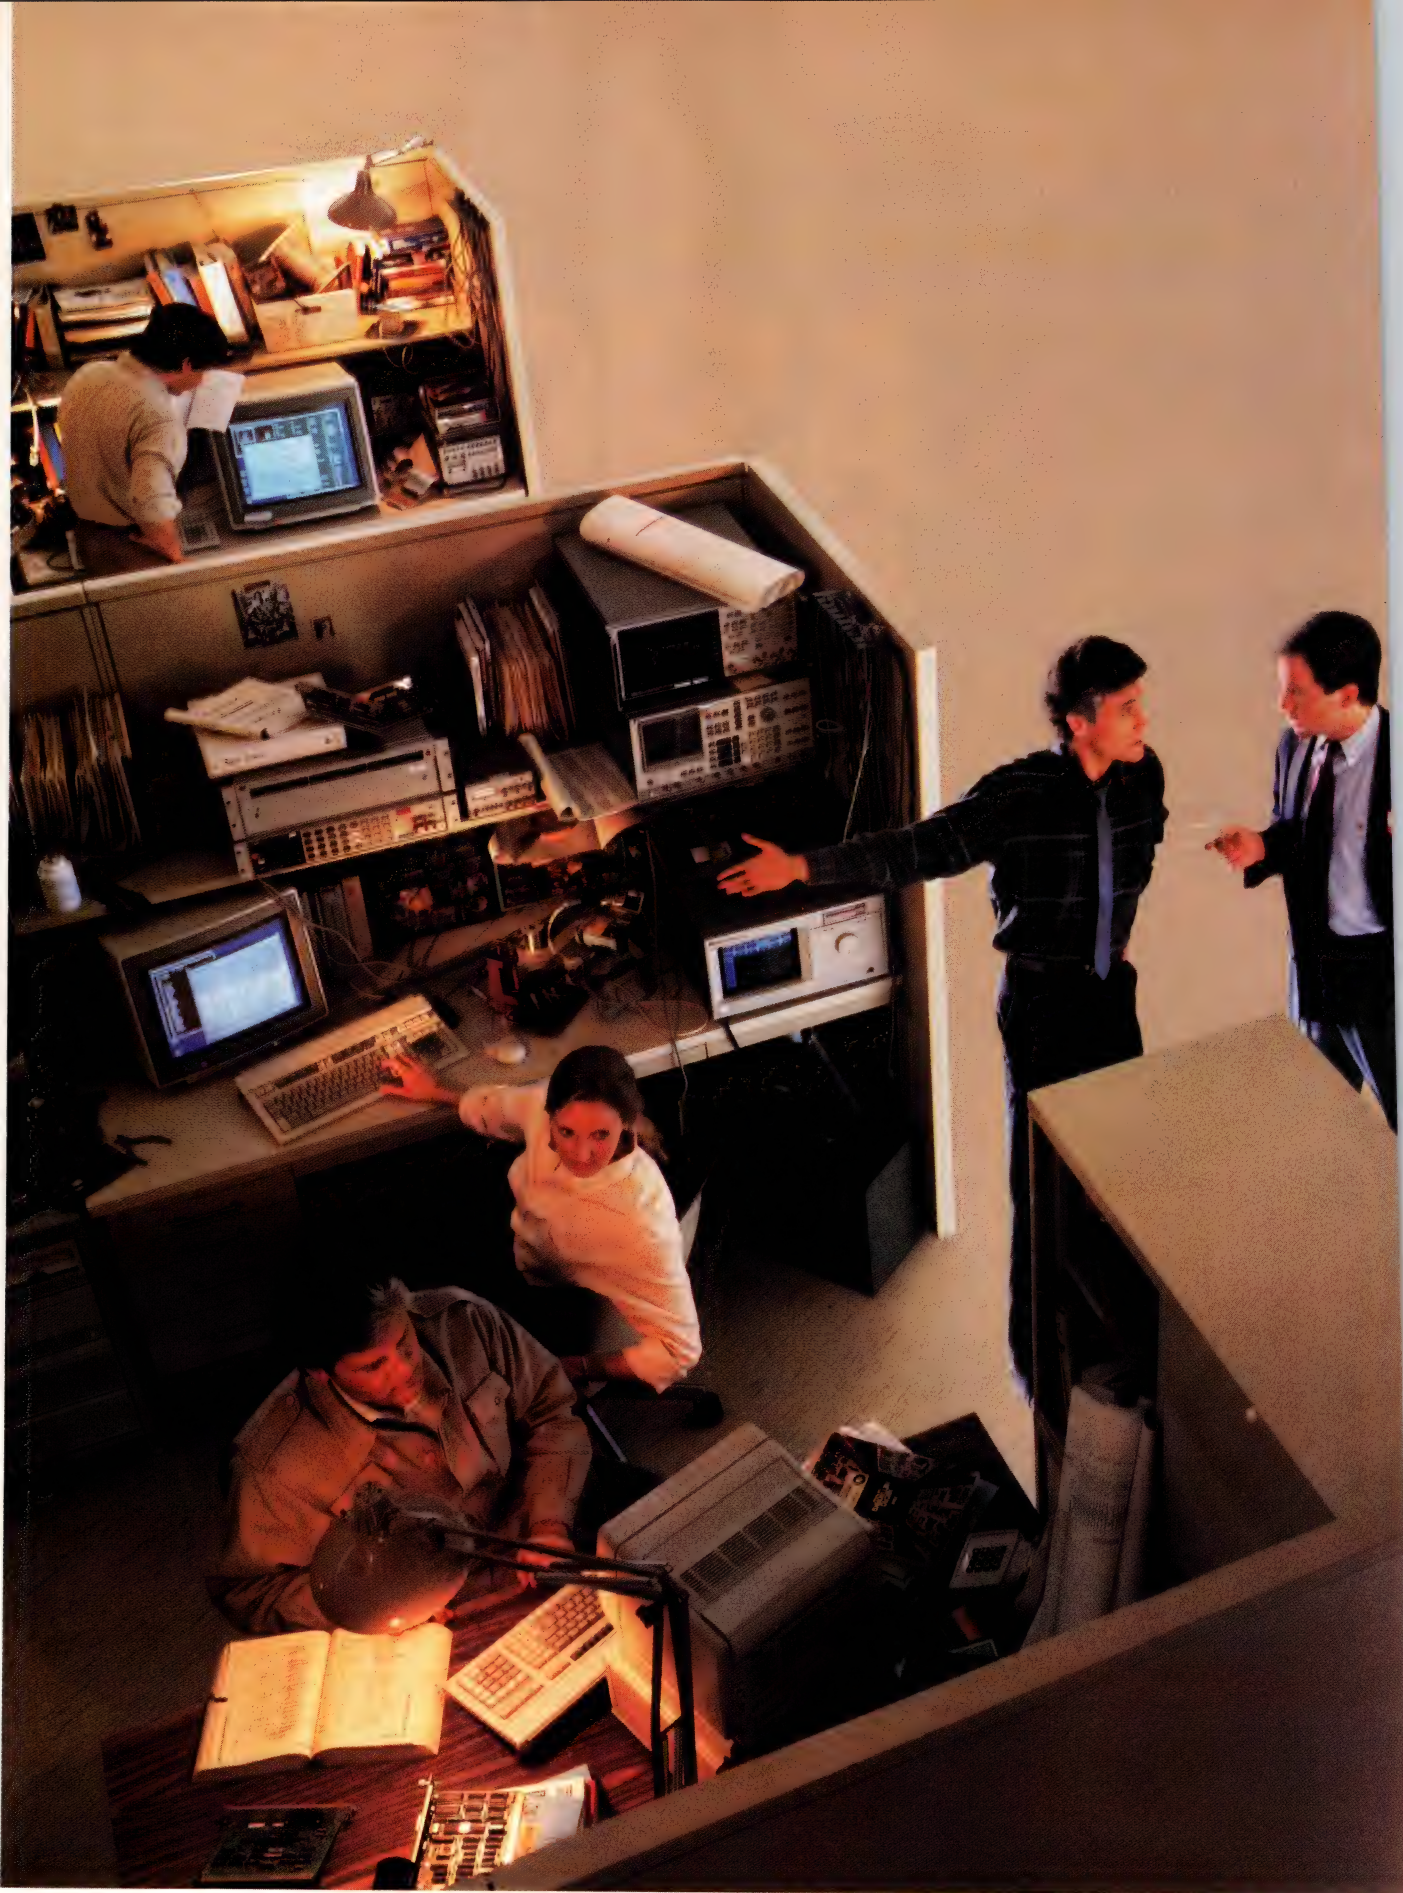

“We’re getting to market late because prototype revisions are killing us.”

“At HP we faced the same problem. So we developed electronic design automation tools that we use to get designs right before we build expensive prototypes.”

We haven't made prototype revisions a thing of the past...yet. But HP's Electronic Design Automation (EDA) tools can catch most problems while designs are still in their infancy. Where you can fix them faster. At less cost.

As part of DesignCenter, HP's EDA tools handle the spectrum of technology for systems design. From digital to analog and microwave. In designs with ASICs, hybrids and PCBs...even microprocessors. From design capture and simulation to layout and enclosure design. All the resources you need to make sure designs are right before you commit to prototypes.

Once you've built prototypes, HP supports you with the industry's finest test and measurement equipment. Along with the links to integrate design and prototype test.

But it's not just a question of choosing the right tools. It's also the right company. You want a company that's fully committed to support. When you need it. Where you need it. A partner you know you can trust in electronic design automation. That's HP.

Find out how HP EDA tools and support can put you on the competitive track. Call **1-800-752-0900**, Ext. C215 and ask for your FREE EDA "Tool Kit."

There is a better way.



**HEWLETT
PACKARD**

Your C Code has never run faster.

The Microtec® Research C Compiler family has everything you need to create the fastest native or embedded C Code in the world:

- Generates code for Motorola 680X0, Intel 80X86, Zilog Z80/64180 & other microprocessor families
- Full ANSIC including prototypes and keywords CONST & VOLATILE
- ROMable, re-entrant code and libraries
- Position-independent code & data
- Produces in-line floating point instructions or calls to run-time library
- Comprehensive listing options including interleaved C and assembly and Cross Reference Table
- Manufacturer-compatible assembler & linker included
- Supports high-level debugging with full optimization

Microtec Research C Compilers run on IBM PC, Sun, HP, Apollo, DEC, and most other workstations.

For a complete development package, you can add our popular XRAY Debugger™.

And you can debug your C code in any environment, such as emulators, simulators, real-time operating systems and target monitors.

But, in addition to all these features, you get something more:

Blazing speed.

Our first-generation compilers set performance benchmarks for the industry, but that was just the beginning. Call now for free information about our *newest*, speediest, generation of C, Fortran and Pascal compilers.

Your C Code will run faster than ever.

Call now.

Don't delay. We'll rush you latest benchmarks and technical data.

800-950-5554.



**Microtec
Research Inc.**

Creators of the XRAY development environment.

2350 Mission College Blvd. Santa Clara, CA 95054 408-980-1300
London 0256-57-55-1 Munich 089-609-6020 Tokyo 03-502-5598

CIRCLE NO 99

```
console XRAY MAIL CPU 100 /bin/
cmdtool - /bin/csh
% dhry.Microtec V 4.0
Dhrystone(1.1) time for 50000 passes = 16
This machine benchmarks at 2955 dhrystones/second
% benchm.Microtec V 4.0
Perm Towers Queens Intmm Mm Puzzle Quick Bubble Tree FFT
920 1500 400 520 1660 2520 400 560 1220 3440
Nonfloating point composite is 1281
Floating point composite is 3293
```


CD-ROM component-selection tool runs on Sun-3 workstations

CAPS (Computer-Aided Product Selection) is a tool that gives you fast, query-driven access to technical specifications, applications data, and the complete text and graphic images of manufacturers' data sheets for hundreds of thousands of ICs and discrete semiconductors manufactured by more than 375 companies. All component information is stored and indexed on more than 12 CD-ROM disks that your workstation reads with the aid of a CAPS-supplied 4-disk CD-ROM reader unit.

You access the database via a menu-driven user interface that lets you search for a part on the basis of fabrication technology, function, and dc or ac parameters. You can identify equivalent devices and alternate sources, find mil-spec parts, locate functionally identical components with different reliability ratings, and look up replacements for obsolete components. The CAPS database also includes in-depth ref-



erence data covering component upgrades and downgrades, military and DESC (Defense Electronics Supply Center) part numbers, reliability ratings, QPL (qualified parts list) sources, and manufacturers' addresses and phone numbers. If needed, you can print data sheets and applications notes directly from the database.

The CAPS system is available on an annual subscription basis from

Cahners Technical Information Service for \$7950. Update disks are issued at 90-day intervals and include information on new components as well as revisions to existing information.

Cahners Technical Information Service Div, 275 Washington St, Newton, MA 02158. Phone (617) 964-3030.

Circle No 357

In-circuit ASIC verification tool checks designs before prototypes

The Rapid Prototype Machine (RPM) Emulation System is a real-time, in-circuit ASIC verification tool based on Xilinx's Logic Cell Array (LCA). You can design a circuit for ASIC implementation, transfer the design to the RPM hardware, plug the RPM emulator into your target system, and prove that the logic works in concert with the target system. If the logic doesn't work, the emulation system lets you reconfigure the LCAs to debug and correct problems.

The basic RPM configuration

supports the real-time emulation of designs that have as many as 25,000 gates. Modular expansion permits the gate capacity to grow to 100,000 gates. Stimulus generation and logic analysis are built into the basic configuration. Interface cables and plug adapters insert into standard ASIC sockets, and optional component adapters let you use standard components, such as memory devices and μ Ps, as part of the emulation system.

The RPM Emulation System consists of stand-alone emulation hard-

ware and software. The software consists of the emulation-setup and embedded-design-analysis tools. An Ethernet interface or a SCSI port connects to your Daisy, Valid, or Mento workstation and lets the workstation control the emulation system. Pricing for the RPM Emulation System starts at \$125,000.

Quickturn Systems Inc, 1023 N Shoreline Blvd, Mountain View, CA 94043. Phone (415) 967-3300. FAX 415-967-3199.

Circle No 358

Analyzer package features test-fixture accessibility

The DFA (design for accessibility) Analyzer is a member of the Test-bridge family of design-for-test products that are part of the vendor's Allegro pc-board-design system. The analyzer lets you incorporate access for automatic-test-equipment test fixtures when you place and route components on your board.

Using the DFA Analyzer, you can evaluate the accessibility of signals on boards that use fine-line technology, including micro vias and blind or buried vias. You can

also evaluate boards that have surface-mount devices on both sides for accessibility to clamshell-type fixtures and fixtures that probe only one side of a pc board.

The analyzer lets you automatically identify existing via holes and pads that meet test-fixture requirements; the software will limit test points to those locations where the fixture has probes. In addition, the software inserts test points on the proper grid for those nets that don't have a readily accessible test location. To guide the selection and in-

sertion process, you can use the vendor's defaults or introduce your own test rules. In addition, a numerically controlled (NC) drill-hole feature generates NC drill and route tapes of test-point locations to drive the equipment that produces custom test fixtures.

Allegro runs on Sun 3 and 4 workstations and DEC VAX stations. Prices start at \$20,000.

Valid Logic Systems, 2820 Orchard Pkwy, San Jose, CA 95134. Phone (408) 432-9400.


Circle No 359

Analog simulation package offers enhanced convergence and large library

AccuSim, an analog simulation package, provides enhanced convergence performance that lets you concentrate on circuit design rather than on how to make the simulation converge. Among its enhancements is a timestep control, which, the vendor claims, will work on circuits having more than 5000 transistors.

For cases where the standard simulation doesn't converge, AccuSim provides you with five interactive convergence-assistance algorithms. The likelihood of convergence is much greater if the program is able to compute abrupt changes in small steps. The AccuSim lets you enable or disable any of the five algorithms and control the number of convergence-assisted iterations performed by the simulator.

AccuLib, a library of models for AccuSim, contains open models for 1800 parts, including bipolar transistors, diodes, JFETs, MOSFETs, ICs, and power supplies. The ven-

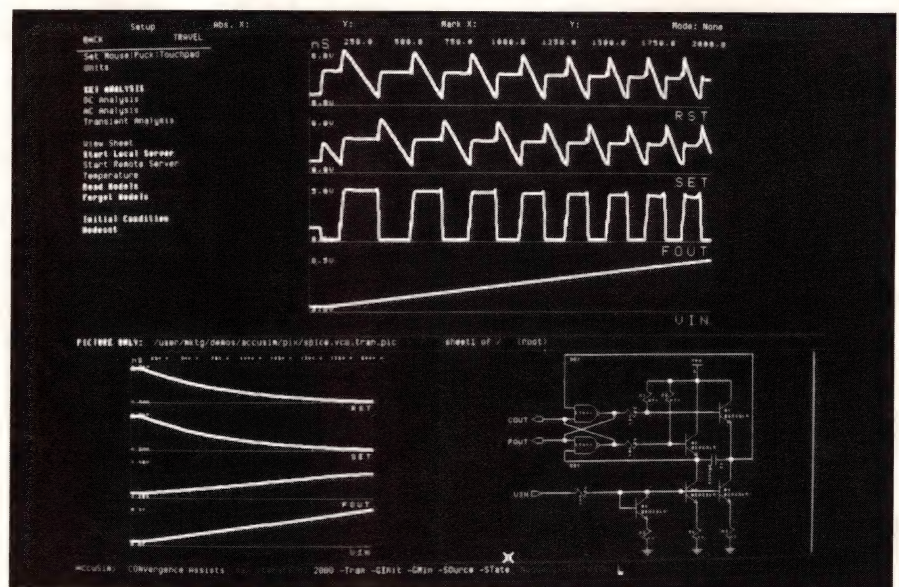

dor plans a library growth of 600 parts per year, provided in quarterly updates.

The cost of adding AccuSim to an existing Idea Series workstation is \$22,000; AccuLib, as a site subscription with quarterly updates, sells for \$22,000. A Monte Carlo up-

grade is available for \$7500. Pricing for the full Analog Station, including Apollo DN3010 hardware, starts at \$31,900.

Mentor Graphics Corp, 8500 SW Creekside Pl, Beaverton, OR 97005. Phone (503) 626-7000.

Circle No 360

THE SEAT IS CHEAP. THE POWER IS AWESOME.



Our low-cost OS/2 tools put more muscle in your PCB design.

Tired of paying up to \$80,000 per PCB design seat? Look at LEDAX™ Plus. For \$8,795, you can put our complete workstation-proven, workstation-powerful toolset on every OS/2™-Presentation Manager PC platform.

LEDAX Plus is tightly coupled and highly interactive, with fast, easy control from schematic capture step-by-step through design to photo-tooling. Advanced functionality and network-

ing with complete Sun/Apollo/VAX compatibility. True multi-tasking. "Point and click" mouse/icon-based graphical interface. Virtual memory with no MS-DOS constraints. Result: reduced design time, improved manufacturability and reliability.

Get in touch with LEDAX Plus. For more information, call toll-free: (800)-663-6226. Put more punch in your product development.



LEDAX

by Microtel Pacific Research. Tel: (604) 294-1471.

LEDAX is a trademark of Microtel Pacific Research Limited. OS/2 is a trademark of International Business Machines Corp. All other brand and product names are trademarks or registered trademarks of their respective companies.

Digital-signal-processing workstation performs algorithmic verification

The Signal Processing WorkSystem (SPW) does for signal-processing design what schematic capture did for logic design. Starting from software descriptions of primitives, you can interactively capture DSP system algorithms. You can then apply stimuli to your system's inputs and tweak the system to verify and optimize performance.

The menu-driven SPW features a Block Diagram Editor (BDE), which supports hierarchical design; you use the BDE to focus on algorithmic design. Because the BDE has revision control and offers transparent location and relocation of design data on a network of workstations, you can partition de-

signs among a team of engineers.

The components you use to construct and simulate a DSP system come from the Function Block Library (FBL). This library contains about 100 software-coded function blocks. If you need a function that's not included in the library, you can write source code in C or Fortran to create a custom block. While the simulation is running, FBL lets you view signals, modify simulation parameters, and observe the results.

The Simulation Program Builder takes the signal-flow block diagram from the BDE and converts it into a program that simulates the signal-flow behavior of an entire DSP system. Your design can incorporate

multiloop, nested, and hierarchical feedback paths.

The Signal Display Editor creates, edits, displays, and analyzes signals within your DSP system. Its interactive commands let you cut and paste signals, thereby decreasing the amount of time you devote to signal construction and analysis.

The Signal Processing WorkSystem costs \$25,000 and runs on the DEC VAXstation 3000 and on Apollo DN3000 and DN4000 workstations; it will soon be available for Sun 3 workstations.

Comdisco Inc, 101 California St, 38th Floor, San Francisco, CA 94111. Phone (415) 421-1800.




Circle No 361

260°C FOR 20 SECONDS True Surface Mount Crystals & Oscillators

Now, for the first time, you can surface mount crystals and CMOS crystal oscillators with complete confidence. That's because Epson has developed new materials that will withstand 260°C for 20 seconds (see curve), well above standard IR and Vapor Phase Reflow processing temperatures. And our CMOS oscillators give you high-speed 5 nsec rise and fall times, 45/55 symmetry (typ) and low power consumption.

Also ask about our Surface Mount Real Time Clocks.

MAX RATINGS

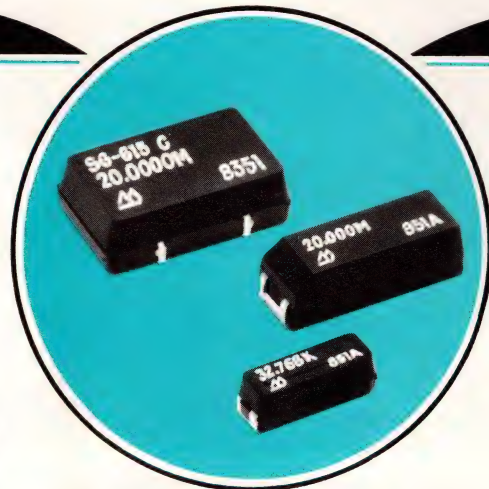

EPSON SURFACE MOUNT CRYSTAL/OSCILLATOR SPECIFICATIONS

CRYSTALS		CMOS CRYSTAL OSCILLATORS	
PART NO.	FREQUENCY	PART NO.	FREQUENCY
MC-405	32.768 KHz	SG-615	1.5000 MHz ~ 25 MHz
MA-505	12 MHz ~ 25 MHz (4 MHz ~ 12 MHz) 9/88 (25 MHz ~ 60 MHz) 1/89		(25 ~ 50 MHz) 1/89

Call your sales rep today.

EPSON®

Component Sales Department

EPSON AMERICA, INC.

Telephone: 213/373-9511

EPSON Sales Representatives: AL-GA-TN-NC The Novus Group 205/534-0044 • CA-No. Costar 408/446-9339 • CA-So. Bager Electronics 714/957-3367 • CO-UT Wn. Region Mktg. 303/469-8088 • FL Dyne-A-Mark 305/771-6501 • IL-WI LTD Technologies 312/773-2900 • IN-KY C C Electro 317/255-1508 • KA-MO-IA Microtronics 913/262-1444 • MA-NH-CT Rosen Assoc. 617/449-4700 • MD-VA Tech. Sales Assoc. 301/461-7802 NJ JMR Sales 201/254-8484 • NY Elcom Sales 716/385-1400 • OH-MI J. D. Babb Assoc. 216/323-7081 • OR-WA E. E. Sales 503/639-3978 • PA Omega Sales 215/947-4135 • TX-OK Component Tech. 214/783-8831

EVERYBODY'S TALKING ABOUT THE FUTURE OF EDA.

WE'RE

Talk is fine.


But the competition's breathing down your neck. Designs are getting more complex. And your market windows are shrinking.

It's time to stop talking about EDA's future—and do something about it.

That's why DAZIX was created.

Formed by the merger of Daisy and Cadnetix, DAZIX is the only brand new EDA company with over 10,000 satisfied users. And a record of innovation no one else can touch.

Design Capture




Digital Analysis




Analog Analysis



Mechanical Design



Thermal Analysis



Computer-Aided Manufacturing




Right now, we're creating the next generation of EDA. And making it what it should have been all along. A complete set of the industry's richest, most powerful design tools. The best graphic interface. Open systems and industry standards. And the most comprehensive support in the business.

STARTING WITH A COMPLETE SET OF THE WORLD'S MOST POWERFUL TOOLS.

Taking it from the top, we now have the richest set of EDA tools ever assembled in one place. Bar none.

There are 170 ASIC design kits and over 4,500 standard components. An Automatic Test Pattern Generator (ATPG) for

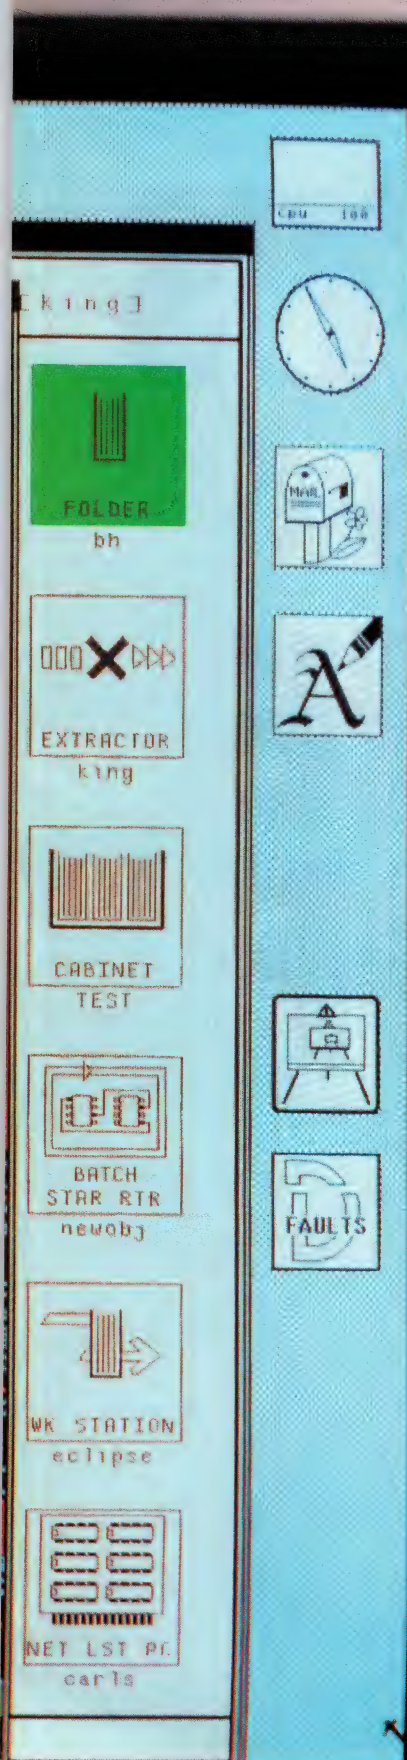

CREATING IT.

the most complete fault coverage of complex sequential ASIC designs. The industry's most popular physical modeler. Powerful hardware accelerators for simulation and routing. PCB layout with 100% auto-routing. And the EDA industry's most intelligent CAM workstation.

Best of all, it's all yours today.

WITH A COMMON INTERFACE THAT'S UNCOMMONLY SIMPLE.


You'll see a visible difference in DAZIX

EDA. It's the industry's best user interface.

It uses graphic icons, function keys and a mouse. Just point and click.

With just one uniform interface to learn, there's


Computer-Aided Design




Manufacturing Documentation



Auto-Routing



Fabrication



minimal training. So your design teams are up and running from nearly the first day they sit down.

ON AN OPEN SYSTEM BUILT TO THE HIGHEST STANDARDS.

Our design tools play all your favorites. Including UNIX, DOS, Ethernet, IEEE 802.3, TCP/IP, NFS and the X-Windows system —plus the EDIF, IGES and IPC data exchange standards.

Our design environment is also open to today's most open platforms. Soon to include the entire Sun family. And that leaves you open to integrate supporting hardware and third-party software. And have it all work together.



BACKED BY THE GREATEST BODY OF SYSTEM KNOWLEDGE EVER ASSEMBLED.

Some of our best design tools are the experience and talent of the industry's largest R&D staff. All 435 of them. All supported by the industry's largest R&D budget. All focused on EDA. And our sales and support staff in 44 offices in 17 countries worldwide.

All dedicated to expanding the capabilities of your design environment. Proof we're putting our money where our mouth is.

IT'S TIME TO CREATE YOUR FUTURE, TODAY.

Ready or not, the future's here. And you're going to need the best tools to deal with it. For details, write or call DAZIX, 200 Parkside Drive, San Fernando, CA 91340, 1-800-556-1234 ext. 32; in California, 1-800-441-2345 ext. 32.

It's time to turn talk into action.



DAZIX™

DAISY / CADNETIX INC.

© 1989, Daisy/Cadnetix Inc. Sun, IBM, AT&T, UNIX, X-Windows, Ethernet, EDIF, IGES, IPC, TCP/IP and NFS are registered trademarks of their respective manufacturers.

SPACE AVAILABLE



LT 1180/81
+ 4 x 0.1µF Caps

Call Linear Technology
800-637-5545

Rugged. Low Power. RS232 Space Saver.

Part Type	Drivers	Receivers	Power Supply Required	Shutdown	Drivers Fault Tolerant to ±25V	Charge Pump Cap Size Req'd.
LT1030	4	0	±12V	YES*	YES	N/A
LT1032	4	0	±12V	YES*	YES	N/A
LT1039	3	3	+5V, ±12V	YES*	YES	N/A
LT1039-16	3	3	+5V, ±12V	NO	YES	N/A
LT1080	2	2	+5V	YES*	YES	1µF
LT1081	2	2	+5V	NO	YES	1µF
LT1130	5	5	+5V	NO	YES	1µF
LT1131	5	4	+5V	YES*	YES	1µF
LT1132	5	3	+5V	NO	YES	1µF
LT1133	3	5	+5V	NO	YES	1µF
LT1134	4	4	+5V	NO	YES	1µF
LT1135	5	3	+5V, ±12V	NO	YES	N/A
LT1136	4	5	+5V	YES*	YES	1µF
LT1137	3	5	+5V	YES*	YES	1µF
LT1138	5	3	+5V	YES*	YES	1µF
LT1139	4	4	+5V, ±12V	YES*	YES	1µF
LT1140	5	3	+5V, ±12V	YES*	YES	N/A
LT1141	3	5	+5V, ±12V	YES*	YES	N/A
LT1180	2	2	+5V	YES*	YES	0.1µF
LT1181	2	2	+5V	NO	YES	0.1µF

*RS232 3 state outputs.

Linear's 1180/81 product using 0.1µF Caps and RS232 family:

- Save board space
- Save Cap costs
- Guarantee no latchup
- Sustain ±25V faults without disrupting supplies
- Consume power comparable to CMOS
- 1µA supply current in shutdown
- Up to 100k baud
- Start at \$2.95 in 100 piece quantities

For a copy of our RS232 handbook, contact Linear Technology, 1630 McCarthy Blvd., Milpitas, CA 95035. Or Call 800-637-5545.



TOUGH PRODUCTS
FOR TOUGH APPLICATIONS.

Computer-Aided Engineering



PARAMETER EXTRACTOR

The Xtract program performs linear and nonlinear modeling characterization of microwave and RF GaAs FETs. The vendor's AnaCat computer-aided test program collects measurement data that Xtract uses to perform FET modeling characterization. From this data, Xtract generates transistor characterization files for a proprietary Bias-Dependent Transistor model. Xtract also supports other FET models to augment model extraction performance. The program's comparison feature lets you verify the quality of modeled results. You can use Xtract to simulate large signal microwave performance and generate s-parameters and dc voltage characteristics of the FET. Xtract runs on Apollo, Sun, and DEC hardware as well as HP 9000 Series 300, and IBM PCs running MS-DOS, PC-DOS, and OS/2. The software includes AnaCat Version 1.2; the Xtract program; an FET kernel; and training, which covers one FET extraction. From \$34,500.

EEsof Inc, 5795 Lindero Canyon Rd, Westlake Village, CA 91362. Phone (818) 991-7530.

Circle No 707


LOGIC SIMULATOR

Lice is a low-cost, menu-driven logic-circuit emulator program. The simulator has three main menu selections: a logic-default editor,

which initializes circuits and sets up the tabular output display; a TTL-family-component dictionary listing; and a logic-circuit entry, which accepts keyboard or diskfile schematics. Lice requires DOS 2.0 or higher with an IBM CGA or equivalent and needs 256k bytes of RAM. It comes with a tutorial manual. \$49.

BSoft Software, 444 Colton Rd, Columbus, OH 43207. Phone (614) 491-0832.

Circle No 708

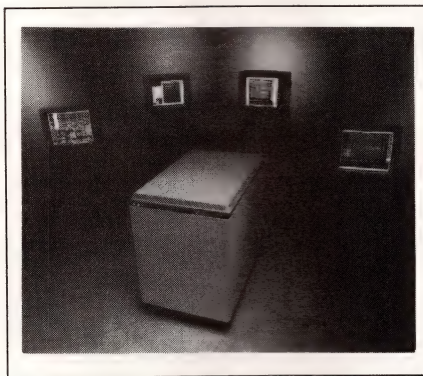

HARDWARE MODELER

The LM-1000 hardware modeling system addresses some of the problems associated with doing system-level simulations of designs involving semicustom ICs. It lets you create a logic model of an ASIC when you have prototypes available. After you mount a device on a device adapter, the modeling method lets you create a functional software shell in which you define the pinouts. A verification utility automatically checks software syntax and semantics.

For standard devices, the LM-1000 hardware modeling system supports a library of more than 600 logic models. Each includes a physical device mounted on a device adapter, shell software that defines I/O, and functional test vectors. Most of the models cost between \$1000 and \$2000. Because the models utilize the actual physical device, they are by definition correct. As long as the shell software is cor-

rect, the model will perform as the actual device—because it is, essentially, the actual device.


You can drive the LM-1000 from a variety of computers, including the Sun-3 and Sun-4; Apollo Series 3000, 3500, 4000, and 4500; DEC VAXstation, MicroVAX, and VAX; and IBM PC/386 and compatibles. It starts at \$50,000 for the minimum unit and is available through Gateway Design Automation, GenRad, Valid Logic Systems, Vantage Analysis, or Viewlogic.

Logic Modeling Systems Inc, 1520 McCandless Dr, Milpitas, CA 95035. Phone (408) 954-5200.


Circle No 709

SCHEMATIC EDITOR

SuperCAD is a low-cost, schematic-entry package that runs on an IBM PC or compatible with 320k bytes of RAM, an IBM CGA, EGA, or Hercules graphics card, a Microsoft mouse, and DOS 2.0 or higher. In addition to the schematic editor, it

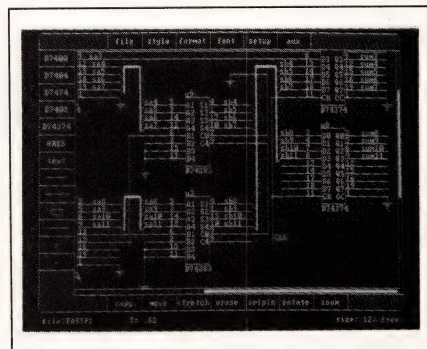

comes with a netlist generator, a library-parts builder, and an ASCII screen editor. The parts libraries are organized into five categories: generic (TTL and CMOS), memory, microprocessors, PLDs, and DSP chips. A library of package outlines makes it possible to perform rudimentary board layout with the schematic editor. Menus covering about 40% of all commands are visible at all times, and other commands are accessible via pull-down or pop-up menus. Regardless of page size, SuperCAD allows you to

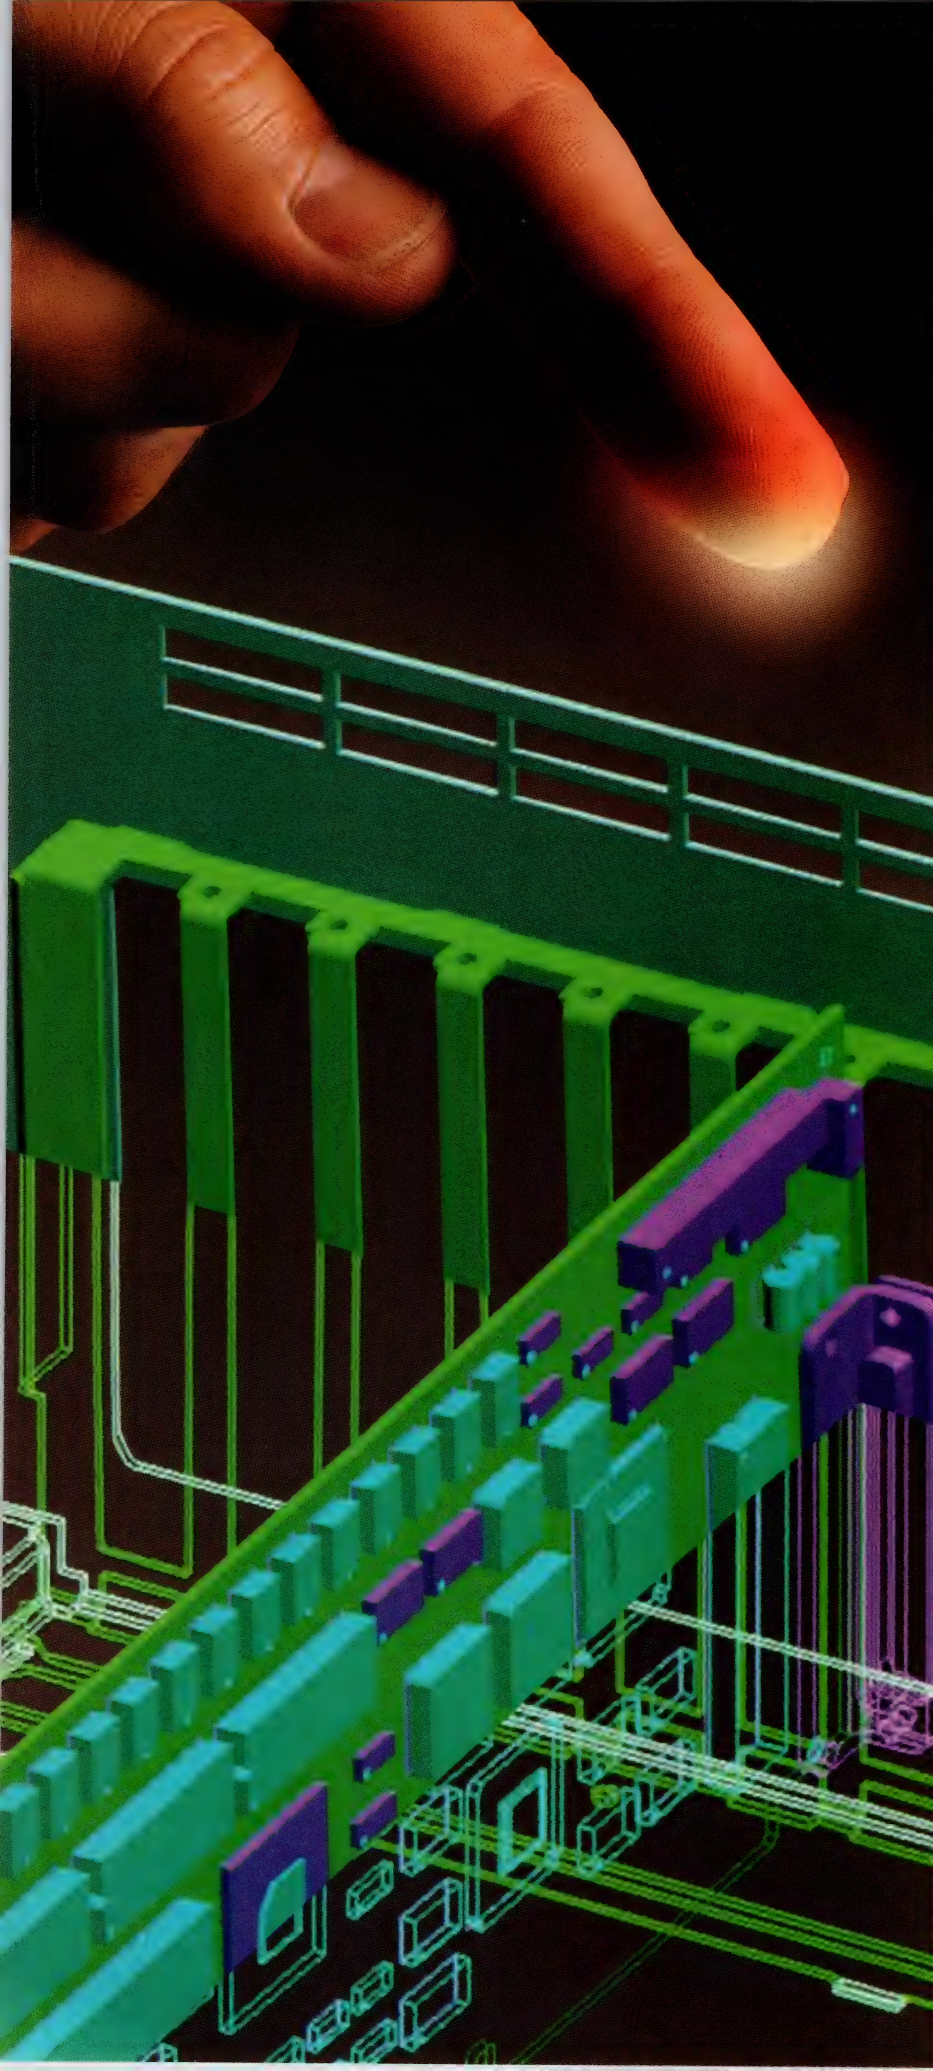A large, close-up image of a human hand with the index finger pointing towards a 3D wireframe model of an electronic package. The model is composed of green and purple rectangular blocks connected by thin lines, representing a complex assembly. The background is dark, making the glowing wireframe and the hand stand out.

From wireframe to solid with just a touch.

Mentor Graphics lets electronic package designers automatically convert 3D wireframes to solid models.

That's right. The benefits of solid models. Directly from wireframe. Automatically.

Just enter your design using familiar, efficient wireframe techniques. Then automatically convert to solids. With shaded images. Geometric and mass properties. And hidden line removal.


Package Station is the first CAE/CAD system designed expressly for the electronic package engineer. With geometric modeling, drafting, technical documentation and thermal analysis all in a single system. And tight links to Board Station, our PCB layout system.

For the first time, PCB and package designers can share vital design information. Immediately. Accurately. And perform thermal analysis that includes conduction, forced convection and radiation.

At last, you head off both mechanical and thermal problems before they ever reach manufacturing.

So let us show you why we've got the right touch in electronic package design.

Phone 1-800-547-7390.

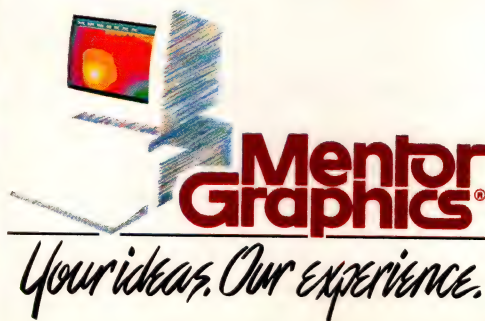


Computer-Aided Engineering

view the entire schematic and zoom in on a small portion. Further, function-key operations include undraw last object, recenter schematic, toggle-mouse mode, and redraw screen. The basic package supports narrow- and wide-carriage Epsom/IBM-compatible dot-matrix printers and can print A- through E-size pages in high or low resolution. \$99.

Mental Automation Inc, 5415 136th Pl SE, Bellevue, WA 98006. Phone (206) 641-2141.

Circle No 710

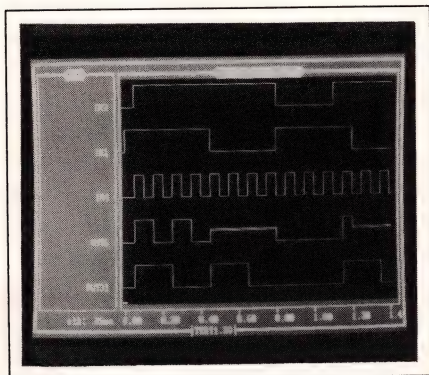

PLD DESIGN TOOL

The CUPL version 3.0 enhancement lets you compile the entire design without concern for the architecture of any one PLD. You then perform simulation as a design-verification step. After you're satisfied that the design is correct, CUPL 3.0 creates a symbol table that indicates the PLD resources you need. You can then choose, either manually or through a database program, the device that best meets your price, availability, and performance requirements.

Highlighting CUPL version 3.0 are models of large devices having as many as one million fuses. To prevent the appearance of bias toward any one PLD supplier, CUPL's designers purposely avoided automating the PLD selection process. Other enhancements include the ability to accept standard EDIF (Electronic Data Interchange Format) output from other vendors' graphics entry packages;

many high-level constructs; repeat commands that allow indexing of equations; and a waveform generator that lets you simulate large PLDs that have asynchronous architectures.

The software is free for users on the vendor's 2-year Maintenance and Update Program. An update package for existing MS-DOS users costs \$250; for new users, prices start at \$1250.

Logical Devices Inc, 1201 NW 65th Pl, Fort Lauderdale, FL 33309. Phone (800) 331-7766; in FL, (305) 974-0975. TLX 383142.

Circle No 711

LOGIC VERIFIER

The Personal Logic Design Verification System (PLDVS) allows you to perform functional tests and develop test programs for your ASIC- and PLD-based designs. The sys-

tem comprises hardware and software that combine with your IBM PC/AT or compatible computer to form a test workstation.

The hardware portion of PLDVS includes plug-in cards for the computer and a generic socket adapter to receive the device under test. The adapter accepts devices with as many as 128 signal pins and is configurable to any device pinout and package style. The software portion allows you to create test programs using a Pascal-like language. You can enter test vectors in tabular form or generate them with algorithms. By using algorithms, you can quickly generate large numbers of test vectors, allowing you to exercise your design thoroughly. A 25-line program, for example, generates 65,000 test vectors for a counter design. The system software also includes a variety of utilities that allow you to design

LEXAN

POLYCARBONATE RESIN


Saving Labor

in structural cell brackets for innovative Intelligent Automation Series control modules from Foxboro.

Outstanding strength and ductility for snap-fit assembly and significantly reduced manufacturing costs. Application-tailored material performance backed by creative technical support—only from GE.

For more information, call:

(800) 845-0600

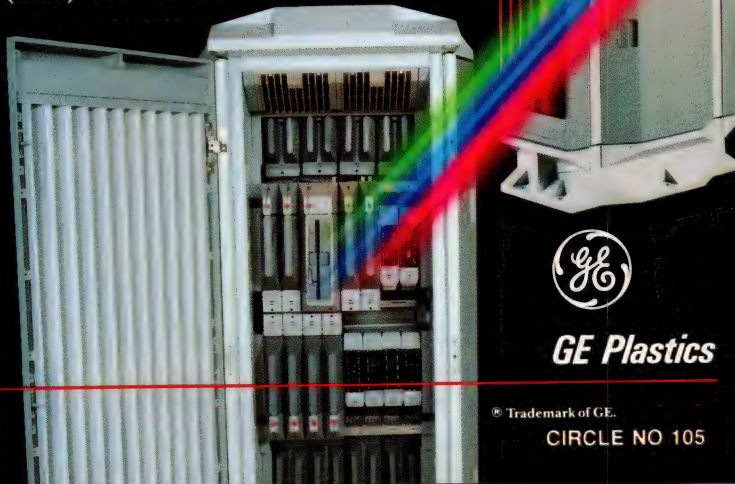

© Trademark of GE.

CIRCLE NO 105

Computer-Aided Engineering

custom test-result displays.


The PLDVS costs \$6595, including software, interface, adapters and documentation. The graphical interface design software costs an additional \$3400. Both require an IBM PC/AT or compatible computer.

Altera Corp, 3525 Monroe St, Santa Clara, CA 95051. Phone (408) 984-2800.

Circle No 712

CAE TOOL

The MAXI/PC schematic-capture and pc-board layout package can execute double-sided, surface-mount designs with as many as 16 signal layers; it also handles multiple power and ground planes having a resolution of $\frac{1}{1000}$ in. High-speed automatic features include placement, gate- and pin-swapping, component renaming, back-annotation,

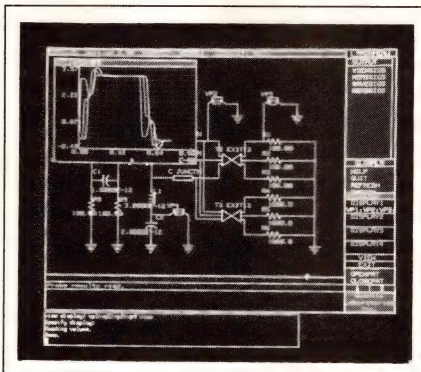

and routing. The package runs on IBM PCs and compatibles. \$995.

Racal-Redac Inc, 238 Littleton Rd, Westford, MA 01886. Phone (508) 692-4900.

Circle No 713

MULTISOURCE ASIC KIT

The Design Kit enables users of IBM PC-based workstations to design an ASIC and compare its performance in alternative gate-array

or standard-cell technologies before committing the design to a vendor. Working within the Viewlogic CAE workstation environment, the kit allows you to reimplement a design in an alternate ASIC technology, resimulate, and compare the design's performance and gate utilization. Vendor technology files provide the data that the software tools use to verify a design's performance. The library contains 109 logic and I/O cells. The verification tools generate delay values that match the vendor's mainframe simulation numbers. The Design Kit checks for spikes, setup- and hold-time violations, and release-time and pulse-width errors. To operate the system, you need an IBM PC/AT or compatible with at least 640k bytes of RAM, an IBM CGA or EGA graphics board, and both a serial and a parallel port. The package includes the generic library, twelve software tools, and a choice of two technology files. \$9950. Additional technology files, \$1200.

Custom Silicon Inc, 600 Suffolk St, Lowell, MA 01854. Phone (508) 454-4600. FAX 508-458-4931.

Circle No 714

PC-BOARD ROUTER

The HiWire-Plus Autorouter is a rip-up-and-reroute, gridless, via-minimizing, multilayer, IBM PC-based autorouter. It lets you make trace-specific design rules; for example, you can tell the autorouter to route power networks with 21-mil width and 11-mil spacing, some signal traces with 12-mil width and 8-mil spacing, and other signal traces with 5-mil width and 5-mil spacing. HiWire-Plus Autorouter completes board routing; it lets traces cross each other and violate other design rules during the early stages of routing. In subsequent phases of routing, Autorouter optimizes, rips up, and reroutes vias for each network. During the final passes, the router centers traces in

LEXAN

POLYCARBONATE RESIN

Saving Space

in advanced, injection-molded enclosures for Intelligent Automation Series process control consoles from Foxboro. Specified instead of metal for impact strength and corrosion resistance in harsh industrial and field environments. Parts consolidation for compact design. Marketable advantages, all-out design and engineering support—only from GE.

For more information, call:
(800) 845-0600



GE Plastics

CIRCLE NO 105

® Trademark of GE.

Computer-Aided Engineering

the routing channels and further optimizes vias. For critical traces, you can prewire before starting the autorouter. To operate the HiWire-Plus Autorouter, you need the HiWire-Plus CAD package and an IBM PC/XT, PC/AT, or PS/2 with 640k bytes of RAM. A utility program can translate FutureNet, OrCAD, Schema, and Tango netlists; Algorex, Cadnetix, and SciCards netlist translators are being developed. \$895.

Wintek Corp, 1801 South St, Lafayette, IN 47904. Phone (317) 742-8428. FAX 317-448-4823.

Circle No 715

tation or from the layout. The ACADEMY package, which integrates the vendor's Touchstone, Libra, and MiCAD tools, creates a single simulation database that contains all the information regarding the schematic, the layout, and the design parameters of the circuit. As a result, changes in the schematic cause the layout to be updated and, conversely, changes in the layout are immediately reflected in the layout diagram; in either case the netlist is automatically updated. The element-macro feature lets you create custom elements. The program produces fully annotated drawings or schematics for production and design notebooks; if you use other programs such as AutoCAD or Hewlett-Packard's EGS, optional utilities can convert the layout to these formats. The package also provides interfaces to a wide variety of other CAD pro-

grams and mask-making tools. Price ranges from \$6000 to \$14,000, depending on the type of host computer and the number of options selected.

EEsof Inc, 5795 Lindero Canyon Rd, Westlake Village, CA 91362. Phone (818) 991-7530. FAX 818-991-7109.

Circle No 716

ASIC DESIGN TOOLS

ChipCrafter/AX and ChipCrafter/ICX are ASIC-design tools that use expert-system techniques to incorporate custom modules into an ASIC designed with the aid of a fully automated proprietary design tool. Until now, bringing custom modules into an ASIC system has been difficult because the foreign block is rarely compatible with the standard ASIC-simulation system. ChipCrafter/AX provides menus



MICROWAVE CAD TOOL

ACADEMY is a graphical design system for microwave and rf engineers, which covers all design phases from schematic entry, through mask layout and circuit simulation, to documentation. You can create a schematic in the standard way, or you can place your layout elements directly (without first having to create a schematic diagram) and then initiate simulation, in which case the program automatically creates a schematic from your component layout data. If you want to change elements or topology, sweep, tune, or optimize your circuit, or perform any other simulation function, you can do so either from the schematic represen-

NORYL[®]

MODIFIED PPO[®] RESIN

Saving Weight

in interior covers, louvers and other internal components for the Foxboro Company's unique Intelligent Automation Series control consoles.

Specified for high strength and maintenance of properties in operating temperatures exceeding 80°C. Rugged performance at a fraction of the weight of metal. Total systems for productivity—only from GE. For more information, call:
(800) 845-0600



GE Plastics

CIRCLE NO 105

Computer-Aided Engineering

that let you define the layer assignments and port locations of your custom module, a simulation model of the module, and a schematic symbol in the workstation's format. The vendor's ChipCrafter ASIC-design workstation will then be able to compile the module as a block of standard cells or as an arbitrarily sized block. The large number of rulesets include a wide variety of CMOS fabrication options such as 1.0- μ m features and RAD-hard capabilities. ChipCrafter/ICX provides all the features of ChipCrafter/AX, and provides tools and utilities that allow you to export all or part of a design to another design system. Because you have access to the layout in GDS or CIF formats, you can complete design-rule checking, electrical-rule checking, and layout-vs-schematic verification at the design site, and then take the design to any qualified foundry for fabrication. Both tools come with an automatic interface to Mentor Graphics (Beaverton, OR) IDEA workstations. ChipCrafter/AX, \$108,000; ChipCrafter/ICX, \$149,000.

Seattle Silicon Corp, 3075 112th Ave NE, Bellevue, WA 98004. Phone (206) 828-4422. FAX 206-827-4224.

Circle No 717

SIMULATOR

DesignSim A&D lets you simulate both analog and digital circuits concurrently, and provides a single-screen display of analog and digital signals that are synchronized in time and use the same time scale. You can run simulations of electronic devices at the system, cell, or transistor level with the accuracy of Spice. You can also model electromechanical interfaces. DesignSim A (the analog portion) is based on Analogy Inc's (Beaverton, OR) Saber simulator; DesignSim D (the digital portion) is based on HHB Systems Inc's (Mahwah, NJ)

Cadat simulator. DesignSim supplements, and is accessible from, the vendor's Product Design Series I (PDS I) ASIC-design tool set, and is fully integrated into the newer PDS II tool set. When you run a mixed-signal simulation, each simulator schedules its own time steps for optimal execution speed, and both simulators analyze information simultaneously so that feedback is propagated through the analog and digital simulators as required. The simulation and analytical algorithms maintain a high level of accuracy and result in a decrease of simulation time. Pricing for PDS II with DesignSim A&D for a single user, from \$64,000.

NCR Corp, 2001 Danfield Ct, Fort Collins, CO 80525. Phone (303) 226-9500.

Circle No 718

PC-BASED PCB CAD

Cadstar 4 is a moderately priced tool in the vendor's trio of pc-board design packages. Cadstar 4 accommodates complex boards with surface-mount devices on both sides of the board and handles multiple power and ground planes. It provides autoplacement routines that let you interactively optimize connections during component movement for higher density and shorter track lengths. The software can handle as many as 1023 components and 3500 connections per design. Cadstar 4 runs on IBM PC/ATs and compatibles as well as on 80386-based systems. \$4850.

Racal-Redac Inc, Box 365, Westford, MA 01886. Phone (508) 692-4900.

Circle No 719

PLD COMPILER

The PLDASM-EKF assembler/compiler for a range of programmable logic devices, including PALs, GALs, and MegaPALs, runs under the OS-9 operating system for

68000 family processors. The device accepts Boolean equations for data input and has a macro capability that allows you to define more complex Boolean functions. As you step through generated source-code files, the PLDASM-EKF marks and comments on syntax errors and checks physical restrictions of the selected PLD device. If required, you can display the compiled fuse plot on a terminal, or plot it on a hardcopy device. The PLDASM-EKF generates a standard JEDEC format output file that's suitable for inputting into a variety of PLD programmers. Approximately \$500.

EKF-Electronik-Messtechnik GmbH, Wedekampstrasse 1a, 4700 Hamm 1, West Germany. Phone (02381) 12630. TLX 828621. FAX 02381-15067.

Circle No 720

PC-BOARD DESIGN TOOL

Scepter PCB is a pc-board production tool suitable for use with multi-layer analog, digital, and surface-mount boards. The layout editor lets you define component libraries, designate digital and analog packages, and assign I/O pins without the use of text files. The program can place as many as 2000 schematic elements automatically and imposes no limit on the number of components you place manually. Scepter PCB can route as many as 5000 signal nets automatically or 64,000 nets interactively; it can accommodate packages with as many as 2000 pins and can display and edit as many as 50 layers at one time. The Graphical Routing-Feasibility Analysis program uses colors to indicate routing density, allowing you to quickly identify those areas on the board where potential routing-disconnects may occur. The design-rule checker not only identifies trace-to-trace spacing, but also examines all graphics primitives and identifies violations. For example, it accurately calculates clearances

CONTROLLING CHANGE

Lock Into Dynamic Design, Material And Processing Creativity With GE.

Total solutions from a single source. A spectrum of resin technologies. Advanced alloys, composites, copolymers. Leading-edge process development and expertise. The exclusive Engineering Design Database—unique design and analysis tools in a total system for plastics engineering.

The innovative Intelligent Automation Series from Foxboro. Enclosures of injection-molded LEXAN® resin. Cell brackets of foam-molded LEXAN resin. Internals of NORYL® and VALOX® resins. Over 300 parts in all.

Diverse technologies
and application development
resources—only from GE.

For more information call:
(800) 845-0600



GE Plastics

© Registered Trademarks of General Electric Company.

CIRCLE NO 105

Computer-Aided Engineering

around tapered polygons and identifies traces that may be shorted by any text or logos that are present on the board. \$19,999 to \$29,999.

Royal Digital Scepter Systems,
2855 Kifer Rd, Santa Clara, CA
95051. Phone (408) 980-9492.

Circle No 721

RULE CHECKER

The LRC-100 Layout Rule Checker works with the vendor's LTL-100/SUN pc-board-design package. You can check all your layout rules in batch mode. You can also interactively select specific design rules for checking, view error vectors, edit

the structure, and recheck. The LRC-100's hierarchical checking structure eliminates redundant errors. Its basic capabilities include width checks, spacing checks within a layer or between layers, and internal and external notch checks. You can also verify areas using the intersect, enclosure, and overlap capabilities. You can define rules with the Boolean operators (AND, ANDNOT, OR, and XOR), as well as by path length. In addition, the LRC-100 offers a perimeter check. The package runs on SUN 386i workstations. \$9850.

Integrated Silicon Systems Inc,
Box 13665, Research Triangle
Park, NC 27709. Phone (919) 361-5814.

Circle No 722

RELIABILITY TOOL

The Reliability Prediction Program, RPP-V-3.1, is an interactive program that presents component failure rates when you enter data through form-fill menus. You can enter your own generic parts data or you can use the data from libraries. Further, you can set defaults for the quality level of all parts, for junction temperature of ICs, and for the voltage applied to transistors and diodes. Editing features let you make changes and replicate and export data. RPP-V-3.1 runs on DEC VAX computers under VMS 4.6 or higher. Optional features include a batch-loader program and a component stress-analysis program. The standard Reliability Prediction Program includes library maintenance and global-change features and comes with a 30-day money-back guarantee. First-year charge for the basic program, from \$6000; annual renewal charge, 20% of the first-year charge.

Powertronic Systems Inc, Box
29109, New Orleans, LA 70189.
Phone (504) 254-0383.

Circle No 723

VMIC
THE DEC CONNECTION

When you need high performance, state-of-the-art VMEbus solutions, call VMIC, your one stop DEC CONNECTION specialists.

VMIMVE-DRB32E
HIGH PERFORMANCE
DEC DRB32-E CONTROLLER

VMIMVE-DRIIW-A
HIGH PERFORMANCE
DRIIW CONTROLLER

2-YEAR WARRANTY

VMIMVE-DRIIW-485
LONG LINE
DRIIW CONTROLLER

VMIMVE-DRIIW
STANDARD DRIIW CONTROLLER

VMIC is your one stop DEC CONNECTION. We offer the widest variety, highest quality and most mature DEC Computer links in the industry with hundreds of installations throughout the world. Our DEC compatible product line solves your VMEbus to DEC connection problems by providing:

- High performance DEC 88XX series DRB32-E Controller with 4.02 Megabyte/sec transfer rate (burst mode) and 32-bit per cycle DMA transfer on VMEbus;
- High performance DRIIW Controller featuring 32-bit data transfer, 32-bit addressing, byte and word swapping;
- Long-line DRIIW Controller providing links up to 2,000 feet;
- Standard DRIIW Controller featuring 16-bit data transfers and 24-bit addressing

VME MICROSYSTEMS INTERNATIONAL CORPORATION
12090 South Memorial Parkway
Huntsville, Alabama 35803-3308
(205) 880-0444 FAX No. (205) 882-0859
1-800-322-3616, ext. 1089

INTERNATIONAL DISTRIBUTOR: Diamond Point International, Inc. 9 Enterprise Close, Midway City Estate, Rochester-upon-Medway, Kent (44) (0634) 722390 • FAX: (44) (0634) 722398
CANADIAN DISTRIBUTOR: Tracan Electronics Corp. • 1200 Aerowood Dr., Unit 4, Mississauga, Ontario L4W 2S7 • (416) 625-7752


VMIC
DEC is a registered Trademark of Digital Equipment Corporation

CIRCLE NO 107

Demanding Designers Need the Best

OrCAD/SDT III

Schematic Design Tools for the PC

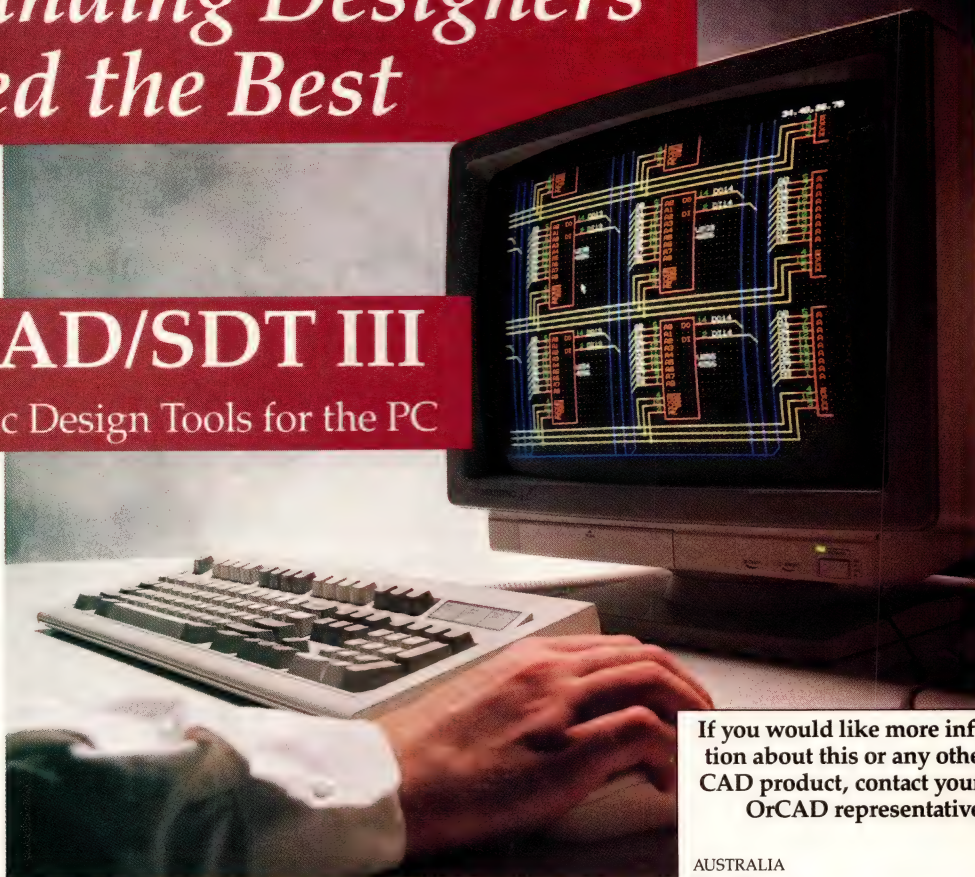

Ease-of-use + Power = Productivity

In today's tough design environment, good engineering tools aren't good enough. You need the best to get the job done.

OrCAD/SDT III offers the power

SDT III comes with the options you'd expect to pay extra for

- **Completeness:** A library of over 6100 parts that you can browse through in a breeze. Utilities to generate Bill-of-Materials, Electrical rules check, create custom library parts.
- **Compatibility:** Over thirty netlist formats; over 50 supported display adapters; over 50 printer drivers; a dozen plotter drivers. We conform to your system better than anyone.

- **Complexity:** 4000+ sheet design capacity for single designs. 200+ levels of hierarchy. Great support for small, simple designs to large, complex hierarchical systems.

- **Control:** SDT III gives you the ability to customize the work environment to make you more productive. This includes user definable macros, text/object sizes, sheet sizes, graphical object editor, even the colors on the screen.

OrCAD/SDT III makes it easy

The lightning fast operation saves time. The intuitive, pop-up menu displays your most likely next action. This means a short learning curve and immediate productivity.

Get our No-risk, Demo Disk

Try before you buy. Get our demonstration disk and see for yourself the solid performance SDT III has to offer.

Once you've given our demo disk a spin, you'll know one of the reasons why OrCAD is the world's leading supplier of PC based CAE tools.

All OrCAD products come complete with one full year of technical telephone support, free product updates and access to our 24 hour BBS.



1049 S.W. Baseline Street Suite 500
Hillsboro, Oregon 97123
(503) 640-9488

If you would like more information about this or any other OrCAD product, contact your local OrCAD representative.

AUSTRALIA
Prometheus
0 3862 3666

AUSTRIA
Dahms Elektronik GmbH
0316 640 300

BELGIUM
INEX
(322) 649-9991

DENMARK/NORWAY
NordCAD
0 817 3299

ENGLAND
ARS Microsystems, Ltd.
(0276) 685005

FINLAND
Elektrotel OY
0754 3122

FRANCE
ALS Design
(01) 46.04.3047

ITALY
BRM Italiana
(011) 7710010

ITALY
MicroData Systems
0187 966 123

JAPAN
Sotec Company, Ltd.
045 (641) 0802

SPAIN
Next-For S.A.
0261 2415

SWEDEN
Technology Partners
08 156815

SWITZERLAND
Logmatic AG
056 83 38 38

WEST GERMANY
COMWARE GmbH
040 - 818074

Call or write today for your Demo Disk!

Solid-state relays

satisfy a wide range of switching needs

Tom Ormond, Senior Editor

In diverse applications, ranging from replacing reed relays in low-power tasks to high-performance military needs, solid-state relays (SSRs) switch at higher speeds and have longer operating lifetimes than electromagnetic relays (EMRs).

Although, in the decades since their introduction, solid-state relays (SSRs) haven't eliminated the need for electromagnetic relays (EMRs), they do offer many major advantages over the earlier devices. For example, today's SSRs reliably switch ac or dc loads from current levels as low as 1mA to values approaching 100A. In addition, SSRs typically switch these loads 10 times faster and operate at least 10 times longer than EMRs. For almost any application, you can readily find a solid-state relay (SSR) to satisfy your needs.

Switching speed is a big plus for the SSR. At best, SSRs can outperform EMRs by a factor of 1000. Even at worst, SSRs are six times faster than most EMRs. Further, a typical SSR can easily outlive a comparable EMR by 10^4 operations.

SSRs also have no bounce problems because they have no moving parts. For this reason, they're not subject to any mounting restric-

tions. Noise, EMI, and RFI problems are practically nonexistent in SSRs, because the zero-voltage turn-on and zero-current turn-off capabilities available in most SSRs make them acoustically and electrically silent. Another benefit is the fact that SSRs employ no magnetic parts. SSRs can be mounted as densely as their package form factors allow—they have no relay-to-relay interaction problems.

Despite these obvious advantages, SSRs do present a few minor disadvantages. First, unlike EMRs, they have leakage current. In the off state, the output of an SSR isn't a true open circuit—there's always some leakage current flowing in the output switch. In high-power SSRs, this leakage current can be significant, reaching tens of milliamps. Further, when the SSR is turned off, you encounter such problems as a voltage drop across the output switch contacts. This voltage drop generates heat; when you're design-



Operating without a power supply, AQV214 solid-state relays from Aromat switch 100 mA/400V ac/dc loads. They feature 1500V ac I/O isolation and operate over -20 to $+80^{\circ}\text{C}$.

In the worst case, a typical SSR switches approximately six times faster than a comparable EMR.

ing with SSRs, you must take into account this dissipation in order to design an adequate cooling system.

SSRs present you with other considerations. SSRs' output flexibility is limited; they're normally available only in spst NO configurations. This constraint can be a problem in certain applications. Also, designing with SSRs is expensive—an SSR can cost twice as much as a comparable EMR. Nevertheless, the SSRs' higher performance and longer operating life more than make up for their higher cost.

Replacing reed relays in low-power tasks

Although some vendors are working on extending their SSRs' relay capabilities at high power levels, most are focusing on the low-power end of the load range. Let's look at some of the low-power SSR products these vendors offer.

International Rectifier's PVA Series solid-state relays are designed to replace conventional electromechanical and reed relays through long life, high speed, low pickup-power levels, bounce-free operation, and low thermal-voltage levels. These solid-state relays have life expectancies that exceed 10^{10} operations; 300- μ sec response time; pickup power as low as 3 mW; a maximum thermal offset of 0.2 μ V; a 1000 V/ μ sec dv/dt withstand capability; and a $10^{10}\Omega$ off-state resistance.

The PVA Series units are single-pole, normally open devices. Internal construction features a photovoltaic

generator. This generator consists of an alloyed, multijunction structure that drives a monolithic, bidirectional, N-channel power MOSFET called a "BOSFET." The input circuitry on this BOSFET output structure improves turn-off time and provides gate-protection functions. Further, this input circuitry on the BOSFET chip utilizes both bipolar and MOS technology to form npn transistors, P-channel MOSFETs, resistors, diodes, and capacitors.


The PVA Series solid-state relays switch ac or dc signals from thermocouple levels through 300V p-p. They easily control signal frequencies into the RF range and feature switching rates as high as 5 kHz. The series includes three part numbers. The PVA2352 operates from a 5-mA input and handles 100-mA loads at voltages ranging to 200V ac or dc. It has an off-state resistance of $10^8\Omega$. Respective figures for the PVA3354 are 100 mA at voltages of 0 to 300V ac/dc and $10^{10}\Omega$. Operating from a 2-mA input, the PVA3324 also handles output loads of 100 mA at voltages of 0 to 300V ac/dc, and it has an off-state resistance of $10^{10}\Omega$.

Output capacitance for all the PVA Series SSRs equals 12 pF at 50V dc; input capacitance measures 1 pF. The devices operate over -40 to $+80^\circ\text{C}$ and are housed in an 8-pin DIP measuring $0.42 \times 0.25 \times 0.15$ in. The PVA2352 costs \$2.87, the PVA3324 costs \$3.65, and the PVA3354 costs \$3.45 (1000).

The DIH-126, -127, and -136 solid-state relays from Dionics are designed for automatic test equipment (ATE) applications where speed, on-resistance, and leakage-current parameters are critical. These units incorporate an infrared LED input; a proprietary turn-off circuit; and a photovoltaic (PV) diode array connected to the gates of a pair of high-voltage MOSFETs, which serve as the output.

The PV array is a series-connected group of photosensitive diodes that are electrically isolated from—but optically coupled to—the input LED. When activated by the input LED, the array generates an open-circuit voltage that is proportional to the LED's input current. This array output voltage drives the gates of the output MOSFETs, causing the relay to conduct.

The DIH-126, -127, and -136 SSRs drive ac or dc loads, depending on how you configure them. You can also configure the units to accommodate two dc loads. For ac loads, the SSRs handle continuous current levels of 0.3 to 1.25A at ± 100 to $\pm 400\text{V}$. For dc loads, the SSRs handle 0.55 to 1.55A at 100 to 400V. In pulse-type applications (a 20-msec pulse with a 1% duty cycle), current ratings range as high as 18A for dc loads

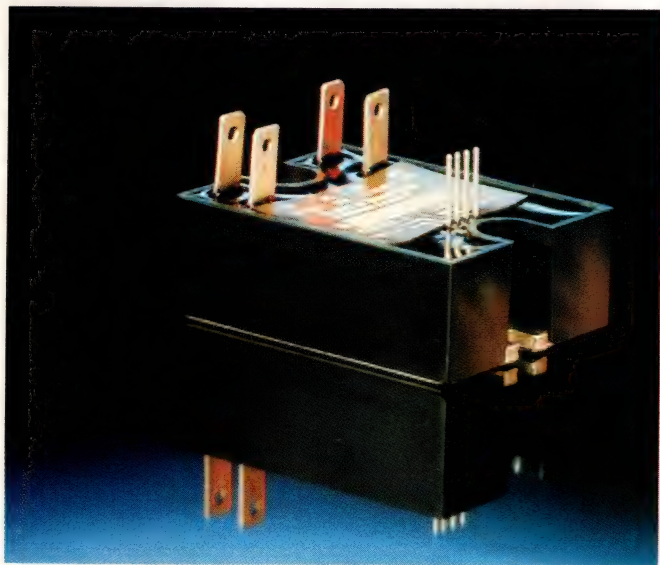

To conserve panel-mounting area, SSRD solid-state relays from Potter & Brumfield offer two independent output switches in one package. Models are available that have load ratings of 25 or 40A at 24 to 280V ac for each output switch.

and 12A for ac loads. The SSRs feature an on-resistance figure ranging from 0.2 to 8 Ω , typical output capacitance of 25 to 320 pF, and off-state leakage of 0.05 to 0.8 μ A.


The operating range for the -126, -127, and -136 solid-state relays spans either -20 to +85°C or -55 to +125°C. On-time figures range from 300 to 950 μ sec for ac loads and 350 to 1000 μ sec for dc loads. Off-time figures range from 400 to 450 μ sec and 450 to 550 μ sec. Minimum I/O isolation equals 500V ac and minimum I/O resistance measures 10⁸ Ω . The relays are priced at \$40.65 (1000).

Who needs a power supply?


Available in 6-pin miniature DIP and surface-mount versions, Aromat's Photo-MOS type AQV214 solid-state relay switches loads of 100 mA at 400V ac or dc. The device features a 5-pF output capacitance and is well suited for applications involving switching in the 50-MHz range.

The AQV214 employs an LED source, an optoelectronic element (solar cell), and two output MOSFETs. When a signal current flows to the input terminals, the LED emits light; this light passes through transparent silicon and reaches the solar cell, which is mounted opposite the LED. The photoelectric element converts the light to a voltage that is directly proportional to the amount of received light. This voltage passes through a control circuit designed for high-speed response, and it charges the gates of the output MOSFETs. The MOSFETs begin to conduct and turn on the load when the MOSFET gate voltage reaches a preset voltage level. When the input-control signal is removed, the LED stops emitting light. This decreases the voltage being generated by the solar cell and turns off the MOSFETs. Once the MOSFETs stop conducting, the control circuit rapidly discharges the FET gates and immediately turns off the load.

Key input specifications for AQV214 SSRs include absolute maximum ratings of 50 mA for LED forward current, 3V for LED reverse voltage, 1A peak LED forward current, and 75-mW power dissipation. On the output side of the SSR, output-switch on-resistance ranges from 12.5 to 50 Ω , and off-state leakage current equals 1 μ A max. Maximum turn-on time equals 0.5 msec and maximum turn-off time measures 0.2 msec. The SSRs' I/O isolation equals 1500V ac, and their operating range spans -20 to +80°C. Unlike mercury-type relays, AQV214 devices have no mounting-position restrictions, and they can be mounted in prox-

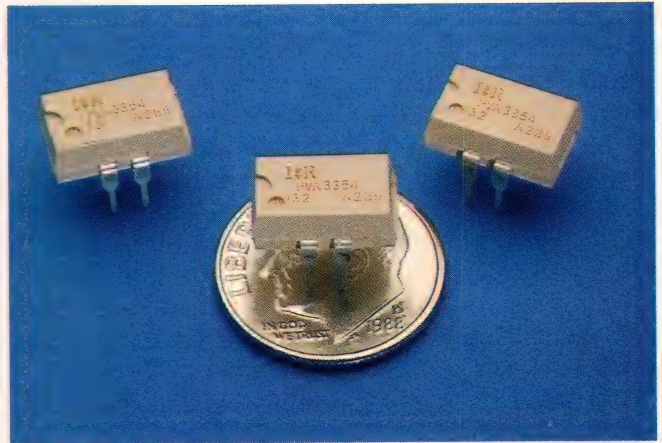

Capable of switching inputs ranging from thermocouple levels through 300V ac or dc, PVA Series units from International Rectifier have lifetimes as high as 10¹⁰ operations, pickup powers as low as 3 mW, and 0.2 μ V max thermal offset voltage.

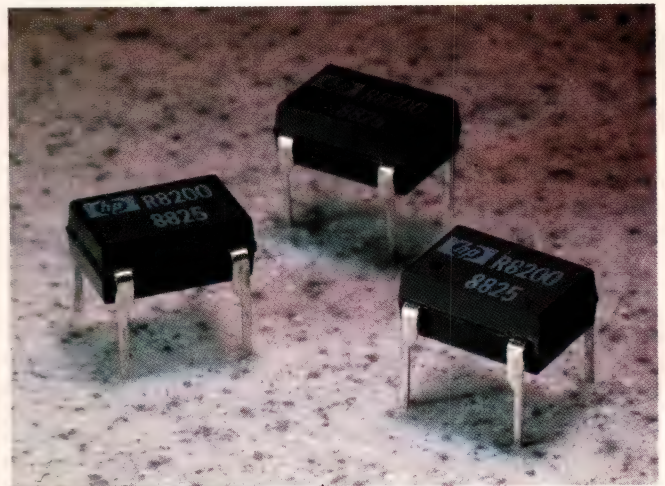

Designed for small-signal switching applications, HSSR-8200 solid-state relays from Hewlett-Packard feature 50- μ sec switching speed, 0.5- μ V max contact offset voltage, and a 5-mA max control current requirement. Housed in a 4-pin DIP, the SSRs operate over -40 to +85°C.

imity because they are unaffected by magnetic fields. AQV214 solid-state relays are priced at \$4.50 (500).

Hewlett-Packard's HSSR-8200 solid-state relay consists of a high-voltage integrated circuit optically coupled with an LED. The device is a solid-state replacement for single-pole, normally open electromechanical relays typically used for general-purpose switching of analog signals.

The LED controls the on/off function of the HSSR-8200. The detector IC contains high-voltage MOS transistors and a high-speed photosensitive drive circuit. When the solid-state relay is energized, a photodiode

SSRs have no mounting-position restrictions and can be stacked in proximity to other units.

array converts the LED's optical radiation to voltage and current levels that are sufficient to operate the switch driver as well as drive the gate-source electrodes of the two FETs. The photodiode array supplies all the power needed to operate the output contacts—no power is required from the circuit that is controlled by the switch. Low contact resistance, low offset voltage, and low level control are key features of these single-pole, normally open solid-state relays. Closed-circuit contact resistance equals 160Ω max, offset voltage equals $0.5\text{ }\mu\text{V}$ max, and control current equals 5 mA max.

The contacts of the HSSR-8200 solid-state relays are rated to switch loads of 200V ac/dc at 40 mA max. Maximum contact power dissipation equals 320 mW . In the off position, contact rating for resistance, leakage current, and capacitance are $10,000\text{ G}\Omega$, 0.02 nA , and 4.5 pF , respectively. Typical control reverse breakdown voltage equals 45V , and control-to-contact isolation measures 3000V dc .

The HSSR-8200 SSRs are housed in a 4-pin DIP. For a control current of 5 mA , typical turn-on and turn-off times equal 50 and $45\text{ }\mu\text{sec}$, respectively. The output switch is rated to withstand an electrostatic discharge of 8000V . All of these SSRs' specifications are guaranteed over an operating range of -40 to $+85^\circ\text{C}$. The HSSR-8200 relays cost $\$2.43$ ($10,000$).

Handling higher power loads

The Acculex SSR Series of industrial-quality solid-state relays are designed to interface μP -based controllers to real-world pumps, motors, heaters, and coolers. The SSRs' high reliability (MBTF equals 20^6 hours min), industry-standard form factor, and simple 4-wire operation allow them to accommodate high-power switching needs in even the harshest environments.

The SSR-10, -20, and -40 switch loads of 10 , 20 , and 40A , respectively, at 24 to 280V ac . These ratings are guaranteed only when the units are mounted on heat sinks; you must derate all SSR load ratings for free-air operation. All solid-state relays operate with TTL-level control signals from 3 to 28V dc —input-control current measures only 6 mA max. The SSR Series relays are housed in the industry-standard, $1.75 \times 2.25 \times 0.90$ -in. hockey-puck package.

All SSR Series solid-state relays employ zero-sense circuitry, which provides zero voltage turn-on and zero current turn-off, and virtually eliminates EMI/RFI problems. Relay turn-on and turn-off time equals 8 msec max. With 4000V-rms optical isolation and dielec-



To virtually eliminate EMI/RFI problems, SSR Series solid-state relays from Acculex employ zero-sense circuitry that provides long-life zero-voltage turn-on and safe zero-current turn-off.

tric strength greater than 3700V ac , the SSRs protect both personnel and costly equipment.

The SSR-10, -20, and -40 have surge-current ratings of 100 , 200 , and 650A , respectively. A built-in snubber network, which features a $200\text{ V}/\mu\text{sec}$ static dv/dt , provides protection against false triggering. The SSRs have built-in reverse-voltage protection on the input and are UL and CSA approved. The SSR-10, -20, and -40 solid-state relays cost $\$34$, $\$38$, and $\$46$, respectively.

Gordos also makes products for high-power applications. G Series solid-state relays are available in versions that switch 10 -to- 90A loads at voltages of 140 , 250 , 280 , and 480V ac max. Minimum load voltages measure 36V ac for 480V-ac versions and 24V ac for all other models. The 280V-ac versions have 600V blocking ratings, and the 480V-ac versions feature 1200V ratings to enhance transient protection.

All G Series SSRs operate from either ac (90 to 280V) or dc (3 to 32V) input-control signals. The devices employ back-to-back dual SCR (silicon control rectifier) outputs and feature snubber networks that have a static dv/dt rating of $200\text{ V}/\mu\text{sec}$. The solid-state relays employ optical techniques to provide 4000V-rms input-to-output isolation. All SSRs are available in either zero-voltage or random-voltage turn-on versions.

Housed in the industry-standard hockey-puck package, which requires a mounting area of $1.75 \times 2.25\text{ in.}$, G Series solid-state relays operate over -20 to $+80^\circ\text{C}$. Maximum on-state voltage drop equals 1.6V and maximum off-state leakage-current values range from 7.5 to 15 mA . Input-to-output capacitance measures 8 pF

max; turn-on and turn-off times are 20 and 30 msec, respectively.

G Series SSRs are UL recognized and CSA certified, and many models also carry VDE approval. A 90A, 480V G Series solid-state relay costs \$45.50.

Shrinking panel-mount needs

As noted earlier, most solid-state relays are spst NO devices. However, certain manufacturers offer relays that do let you satisfy high-packing-density needs.

The SSRD Series from Potter & Brumfield features two independent solid-state relays in a common hockey-puck package. There are two models in the series: a model in which each of the two 1 Form A (spst, NO) outputs are rated to switch 40A at 24 to 280V ac; and a model in which outputs are rated to switch 25A at 24 to 280V ac.

SSRD Series solid-state relays employ inverse parallel SCRs as output devices. To provide protection against false triggering, dv/dt snubber networks across the output switches restrict the rise of most voltage transients to within acceptable limits. The SSRs require an input of 4 to 15V dc and are available in both zero-voltage and random-voltage turn-on versions. They employ optical coupling to provide 2500V rms input-to-output isolation and are UL recognized and CSA certified.

The dual-output solid-state relays are housed in a package that measures $1.75 \times 2.25 \times 0.8$ in., excluding the terminals. Output connections are made via quick-connect terminals, and 0.025-in. square posts provide for the input terminations. All terminals are on the top of the package. SSRD Series solid-state relays in 25A,

zero-voltage turn-on models cost \$30 (100).


To provide even more real-estate savings, Potter & Brumfield offers SSRQ Series units that feature four 1 Form A solid-state relays. Each of the output switches in the hockey-puck package are rated for 20A at 24 to 280V ac. Each triac output features a dv/dt snubber network that prevents false triggering by restricting the rise of most voltage transients to within acceptable limits.

The input-control range spans 4 to 15V dc on both zero-voltage and random-voltage turn-on models. The optically coupled, UL-recognized SSRQ solid-state relay features 2500V-rms input-to-output isolation. Occupying a chassis area of 1.75×2.25 in., the SSRQ stands only 0.93 in. high. These SSRs have 0.25-in. quick-connect terminals for the output connections and 0.025-in. posts for the input terminations. The SSRs cost \$48 (100) for zero-voltage turn-on models.

Up to this point, we've dealt with industrial and/or commercial SSRs. When you consider military applications, solid-state relays surpass electromagnetic relays in a number of areas. As previously noted, SSRs have no contact bounce, arcing, or flashing problems—important factors in military systems, where false contact-closure indications (bounce) can be critical. In addition, SSRs are immune to shock and vibration problems. They are also immune to contact contamination and oxide formation—key advantages in dry-circuit applications.

Meeting high-performance military needs

Teledyne's Model M85C-2AS solid-state relays are designed to satisfy the requirements of military sys-

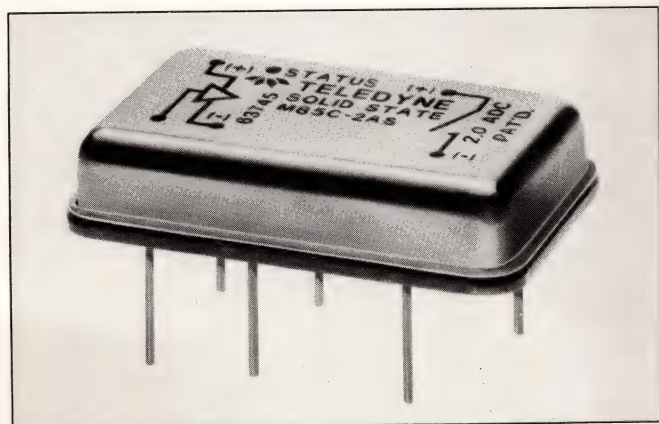

In addition to providing a true output-status indication, M85C-2AS relays from Teledyne feature integrated short-circuit overload protection that functions until you remove the fault condition and recycle the control input.




Offering load ratings to 90A at 480V ac, G Series solid-state relays from Gordos employ dual back-to-back SCRs for output switches and feature 4000V rms optical-type input-to-output isolation.

Zero-crossing switching is readily available in SSRs and virtually eliminates RFI/EMI problems.

tems. The SSRs utilize the latest power FET technology to minimize on-state resistance and bipolar offset voltages normally associated with SSR outputs. Built and tested to MIL-R-28750B utilizing the test methods of MIL-STD-883C, the SSRs meet MIL-STD-704 surge and spike requirements.

Housed in hermetically sealed metal DIPs, the M85C-2AS solid-state relays switch loads of 2.1A at 60V dc. SSR control parameters range from 0 to 18V dc at currents of 250 μ A to 1 mA. On-state resistance at 25°C equals 0.15 Ω max and output voltage drop measures 0.5V dc. Featuring an operating range of -55 to +105°C, the SSRs have a 1-msec max turn-off time. Turn-on time equals 1.5 msec from -55 to +25°C and 3 msec from 25 to 105°C. Maximum output capacitance, dielectric strength, and minimum insulation resistance equal 850 pF, 1000V ac, and 10⁹ Ω , respectively.

The M85C-2AS solid-state relay features an output pin that provides information on the status of the relay output. This output-status feedback provides a built-in test capability for the SSR. The SSRs also feature complete integrated short-circuit and current-overload protection for both the SSR and system wiring. Short-circuit protection is provided whether the relay is switching into a dead short or into a load that's inadvertently been shorted. In either case, the unit senses the short-circuit condition and initiates a shutdown within 5 μ sec. The M85C-2AS blocks the short-circuit condi-

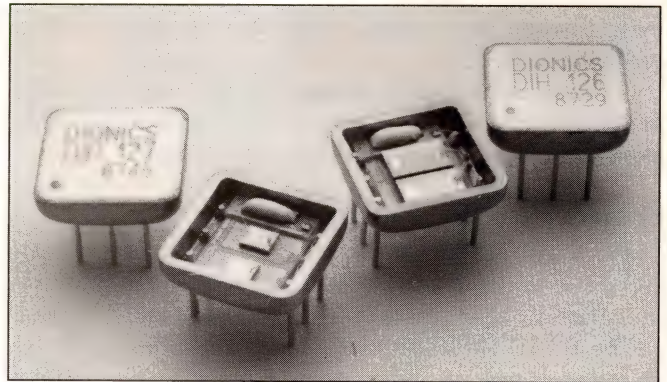

Featuring an I/O isolation of 500V ac, DIH Series relays from Dionics are housed in an 8-pin DIP and switch either ac or dc loads as high as 1.25A at 400V.

tion indefinitely until you remove the short circuit and recycle the input control. The SSR inputs and outputs are optically isolated to protect delicate input logic circuits from output-voltage transients. The SSRs cost \$90 (100).

Only a limited number of applications exist in which you can't use SSRs. The solid-state relay's long operating lifetime and high switching speeds make it the relay of choice for almost all of your switching needs. **EDN**

Article Interest Quotient (Circle One)
High 494 Medium 495 Low 496

For more information . . .

For more information on the solid-state relays described in this article, circle the appropriate numbers on the Information Retrieval Service card or use EDN's Express Request service. When you contact any of the following manufacturers directly, please let them know you saw their products in EDN.

Acculex

440 Myles Standish Blvd
Taunton, MA 02780
(508) 880-3660
TLX 503989
Circle No 382

Aromat Corp

629 Central Ave
New Providence, NJ 07974
(201) 464-3550
Circle No 383

Dionics Inc

65 Rushmore St
Westbury, NY 11590
(516) 997-7474
FAX 516-997-7479
Circle No 384

Gordos

Box 824
Rogers, AR 72757
(501) 636-5000
FAX 501-636-2305
Circle No 385

Hewlett-Packard Co

Components Group
370 W Trimble Rd
San Jose, CA 95131
Phone local office
Circle No 386

International Rectifier

233 Kansas St
El Segundo, CA 90245
(213) 772-2000
TWX 910-348-6291
Circle No 387

Potter & Brumfield

200 S Richland Creek Dr
Princeton, IN 47671
(812) 386-1000
Circle No 388

Teledyne Solid State

12525 Daphne Ave
Hawthorne, CA 90250
(213) 777-0077
TWX 910-321-4610
Circle No 389

Complete 12-Bit A/D Converters

AD9003/AD9005

ATURES


AD9003

12-Bit, 1 MSPS Word Rates
T/H and Timing Included
Single 40-Pin DIP
-80 dB Harmonics
70 dB SNR
 ± 0.5 LSB Differential Linearity
 ± 0.8 LSB Integral Linearity


AD9005

12-Bit, 10 MSPS Word Rates
T/H and Timing Included
Single 46-Pin DIP
-72 dB Harmonics
64 dB SNR
TTL-Compatible
Offset Binary Output

AD9003 FUNCTIONAL BLOCK DIAGRAM

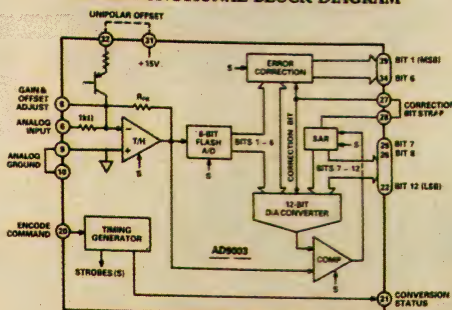

AD9005 FUNCTIONAL BLOCK DIAGRAM

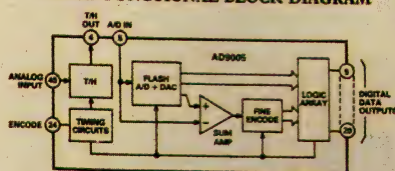

19003 DESCRIPTION

AD9003 DESCRIPTION
The AD9003 A/D Converter is a complete 12-bit, 1 MSPS analog-to-digital converter which combines low cost and high performance in a single 40-pin DIP. The unit includes track-and-hold (T/H), timing, and encoding functions with a power dissipation of only 2.2 watts.

This TTL-compatible device is capable of converting analog signals to the Nyquist limit at encode rates through 1 MSPS. Its 1.5 μ s conversion interval includes acquisition time for the internal 10-bit DAC, making it a true megasample-per-second converter.

proprietary conversion techniques achieve linearity equivalent to the best successive approximation ADC along with subranging conversion speeds. A conversion status signal simplifies transferring output data into system logic. Innovative thick- and thin-film technologies assure excellent performance over temperature without compromising AC characteristics.

The AD9003KM operates at case temperatures from 0 to 70°C; the AD9003SM and AD9003TM units operate from 25°C to +100°C.

AD9005 DESCRIPTION

The AD9005 A/D Converter is a complete 12-bit analog-to-digital converter featuring on-board track-and-hold (T/H), voltage reference, and timing circuits.


High speed and high resolution are combined by using sub-ranging converter architecture. Signal-to-noise ratios of 67 dB at 540 kHz inputs and 65 dB at 2.3 MHz inputs remain at 64 dB SNR when the input is 4.3 MHz.

This kind of performance is made possible by using advanced bipolar integrated circuits, custom designed for the AD9005 and manufactured by Analog Devices.

Despite its extraordinary combination of high speed and high resolution, the AD9005 dissipates only 3.1 watts. This characteristic and its small size make it extremely attractive for applications in which power or space are at a premium.

Commercial devices operate from 0 to +70°C case temperatures as model AD9005TM; the model AD9005TM covers the military range of -55°C to +125°C.

**TO TRACK COMPLETE 12-BIT HIGH-SPEED
A/Ds, HOLD ON TO THIS PAGE.**



If tracking down complete, high performance 12-bit A/D converters is a problem, get hold of our new AD9005

and AD9003. They completely eliminate the need for external support circuits. Because both contain track-and-hold, timing, reference circuits, and everything else needed to perform the digitizing function.

For guaranteed ac and dc performance, the AD9005 is the top choice. Signal-to-noise, harmonic distortion, and differential and integral nonlinearity are 100% tested. Harmonic suppression is typically 75 dB at 540 kHz, and 72 dB at 2.3 MHz

and 4.3 MHz. The AD9005 offers 10 MSPS encode rates and dissipates only 3.1 watts. And to simplify assessing performance, an AD9005 evaluation board is available.


For applications requiring 12 bits at 1 MSPS, you'll get unparalleled linearity and low power dissipation in the AD9003. And its ac performance is verified with digital signal processing. The AD9005 and AD9003 come in with the right performance, the right specs, and the right prices.

To track down more information, get a hold of applications help at (919) 668-9511, or call your nearest Analog Devices office.



Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106; Headquarters: (617) 329-4700; California: (714) 641-9391, (619) 268-4621, (408) 559-2037; Colorado: (719) 590-9952; Maryland: (301) 992-1994; Ohio: (614) 764-8795; Pennsylvania: (215) 643-7790; Texas: (214) 231-5094; Washington: (206) 575-6344; Austria: (222) 885504-0; Belgium: (3) 237 1672; Denmark: (2) 845800; France (1) 4666 25-25; Holland: (1620) 81500; Israel: (052) 911415; Italy: (2) 6883832, (2) 6883833; Japan: (3) 263-6826; Sweden: (8) 282740; Switzerland: (22) 31 57 60; United Kingdom: (932) 232222; West Germany: (89) 570050.

COAXIAL RF CABLE ASSEMBLIES

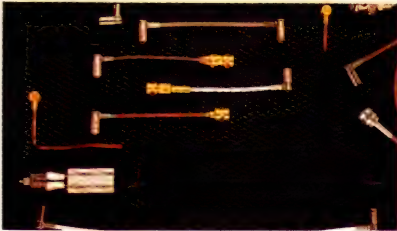

E. F. Johnson JCM commercial-grade equivalents to SMA, SMB and SMC subminiature connectors are now available as RF cable assemblies with any combination of A, B or C type connectors. Virtually any flexible, rigid or semi-rigid coaxial cable can be ordered with the appropriate JCM connectors. The JCM line includes screw and snap-fit connectors in a variety of mounting configurations. These include jacks and plugs in straight and right-angle configurations for bulkhead and PC board mounting, as well as standard mounts with mounting hardware included. In addition, Johnson can create custom modifications of standard items, as well as design and manufacture special connectors to customer specifications. Contact E. F. Johnson, 299 Johnson Ave., Waseca, MN 56093. Telephone: (800) 247-8256. In MN: (507) 835-6303. FAX: (507) 835-6485.

ELECTRONIC CIRCUIT HARDWARE



E. F. Johnson has long been a leader in the design and manufacture of Electronic Circuit Hardware. The same design expertise that created stripline plugs and jacks, a semi automatic termination system for volume production applications, can be yours for just about any special hardware application you may have. In addition to the standard plugs and jacks, many specials are made for particular customer applications. Plugs are supplied for crimp applications, with just about any plating, many shank lengths, diameters and thread sizes with many banana plug spring lengths and widths. Contact E. F. Johnson, 299 Johnson Avenue, Waseca, MN 56093. Telephone: (800) 247-8256. In MN: (507) 835-6303. FAX: (507) 835-6485.

SMB TYPE COAXIAL CONNECTORS



E. F. Johnson JCM-B-DC connectors are die-cast miniature coaxial connectors that can be interchanged and intermated with MIL-type SMB connectors, yet cost up to one-half less. They are available in right-angle crimp type plug, right-angle solder type for semi-rigid cable, bulkhead rear mount jack, or PC mount vertical jack with 0.200" mounting centers, in either gold-plated or nickel-plated versions. They accept RG-178, RG-188, and 0.085 semi-rigid cable and meet or exceed MIL-STD-202 for salt spray, vibration, shock, and temperature, while their construction minimizes RFI. Contact E. F. Johnson, 299 Johnson Ave., Waseca, MN 56093. Telephone: (800) 247-8256. In MN: (507) 835-6303. FAX: (507) 835-6485.

SUBMINIATURE RF COAXIAL CONNECTORS



E. F. Johnson JCM-A, -B and -C connectors are commercial versions of the popular SMA, SMB and SMC Mil types. The JCM-A cost saving difference is a brass body rather than stainless steel, but internally has the same Teflon dielectric material and beryllium copper contact as the Mil SMA.

The JCM-B and -C types use the same materials as their Mil counterparts. Cost reduced versions are die-cast construction and are interchangeable and intermated with Mil type connectors.

Because extensive and expensive documentation is not necessary for the JCM-A, -B and -C commercial types, a much lower cost connector, interchangeable with the Mil types, is available. Not only is the cost much lower, but the commercial versions provide the same performance characteristics as the Mil types.

Contact: E. F. Johnson, 299 Johnson Avenue, Waseca, MN 56093. Telephone: (800) 247-8256. In MN: (507) 835-6303. FAX: (507) 835-6485.

COMPLETE SPACER LINE



A complete line of spacers from E. F. Johnson, available in aluminum, stainless steel, nickel-plated brass, and nylon, serve as an economical means of mounting or stacking printed circuit boards or other devices in electronic equipment. A full range of mounting styles is available, including clearance holes, threaded holes, and male, female, and swage mounts. Metal spacers are available in both round and hexagonal shapes and are available in lengths from 0.125" to 2". Contact E. F. Johnson, 299 Johnson Ave., Waseca, MN 56093. Telephone: (800) 247-8256. In MN: (507) 835-6303. FAX: (507) 835-6485.



How To Make A Long Story Short.

If you don't need a component's life story, why pay for the government red tape? We build components to exactly the same mil-specs, without QPL paperwork. And save you up to 30%. Call 1-800-247-8256 for a free catalog and your nearest Johnson distributor.

JOHNSON
Component Products


© 1989 E.F. Johnson Company. A Company Of Diversified Energies Inc.

Color LCD panel uses TFT technology to achieve high contrast and sharpness

Using thin-film transistors (TFTs) in an active-matrix arrangement, each pixel in this 6.3-in. LCD panel is driven by its own transistor. Individual red, blue, and green filters over each pixel allow 8-color operation. Deleting the color filters yields a monochrome display of high resolution. The panel uses a fluorescent backlight.

Although its interface is multiplexed, when examined at the individual pixel level the display is statically driven by the individual TFT drive circuits, thereby preserving the simplicity of designing in a multiplexed display and eliminating the resolution vs contrast tradeoff normally associated with other LCD technologies.

The thin-film transistors are FETs. The drain leads form column-selecting terminals and the gate leads form row-selecting terminals. When the display selects a

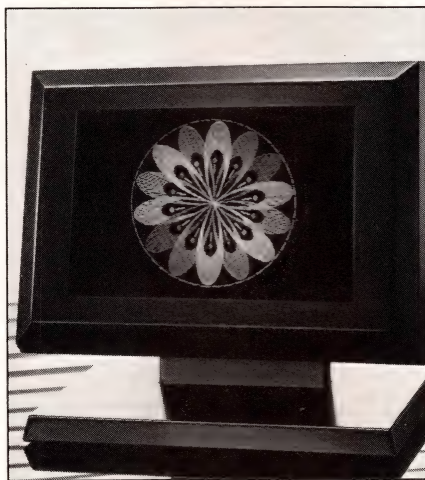

pair of row-column terminals, that FET turns on and activates the LCD pixel connected to that FET's source lead. This action provides high resolution, improved brightness, a wide viewing angle, and significantly improved contrast.

TFTs boast superior image quality because light passes straight

through the display without any defocusing on the pixel edges. Other active displays, such as CRTs and emissive flat panels, appear less sharp because the emitted light travels in several directions.

Specifications include a display area of 96×128 mm, a pixel resolution of $640 \times (200 \times 3)$ for color and 640×600 for monochrome, a contrast ratio of 40:1, and a viewing angle of $\pm 45^\circ$. The display's 40-msec response time is suitable for mouse-driven applications. Power consumption from 5 and 25V supplies is 5W with backlight and 1.5W without backlight. The LCD panel costs \$700 (OEM qty).


Hitachi America Ltd, Electron Tube Div, 300 N Martingale Rd, Suite 600, Schaumburg, IL 60173. Phone (312) 517-1144.

Circle No 390

Liquid-crystal display uses double-super-twisted-nematic technology

Designed for applications requiring high information content, the FLC640-480WSUB liquid-crystal display (LCD) uses double-super-twisted-nematic (DSTN) technology to achieve its performance. The display's polarizing layers consist of indium-tin-oxide coated-glass substrates that produce a 50° viewing cone and a crisp image in a 640×480 -pixel dot-matrix layout.

The black-and-white display features cold-cathode fluorescent side-lighting to reduce the panel's thickness to 0.8 in. A 3-piece, light-

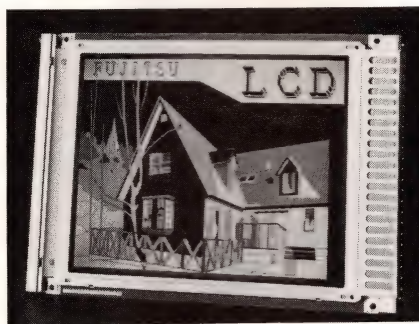

diffusion plate behind the panel disperses backlighting evenly over the entire viewing area. The panel has a typical brightness of 60 cd/m^2

(15.12 fL) and a contrast ratio of 15:1.

The panel's viewing area measures 8.3×6.2 in. Overall dimensions are 11.7×8 in., for a total of 73 in^3 . The display's 180-msec response time can support limited use of graphic pointing devices. The FLC640-480SUB LCD costs \$575 (1000).


Fujitsu Components of America, 3330 Scott Blvd, Santa Clara, CA 95054. Phone (408) 562-1000.

Circle No 391

IBM-compatible keyboards feature a choice of linear or tactile switches

Addressing the personal computer and terminal marketplaces, these advanced 101-key keyboards are plug-compatible with IBM PCs. The RT-101 keyboards operate with PC, PC/XT, and PC/AT systems; a slide switch located on the bottom of the keyboard determines the appropriate electronics.

The mechanical keyswitches, which offer 100 million operation cycles, are available in two versions—linear feedback or tactile feedback. Instead of the usual rubber boot, the linear switch incorporates a spring return mechanism, which significantly extends the switch life. An ergonomically placed cursor pad and dedicated screen-control keys

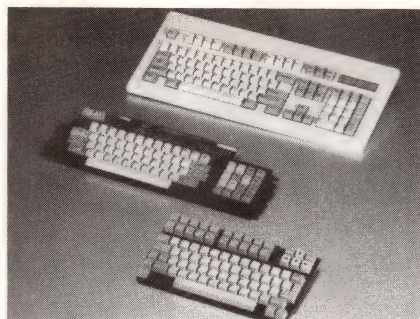

make software programs easier to use. You can simultaneously use the numeric pad and cursor keys without toggling the Num Lock key. Tactile bars on the the F, J, and 5 keycaps assist the typist in locating the home position for finger placement.

Other features include interchangeable key caps, an 8-ft cable that exits from either the left or right side of the keyboard, retractable legs to adjust the keyboard angle, and rubber pads on the bottom of the enclosure to provide a positive grip to the work surface. The RT-101 keyboards are available in OEM quantities or through a telemarketing program that offers 50-piece orders at \$37.50 each.

NMB Technologies Inc, 9730 Independence Ave, Chatsworth, CA 91311. Phone (818) 341-3355. FAX 818-341-8207.

Circle No 392

Sensors measure 0 to 300 psig, provide 4- to 20-mA output

Combining a silicon sensor and high-performance signal conditioning with the isolation of a stainless-steel diaphragm and package, the ST2000G4A Series pressure transmitters provide a calibrated 4-to 20-mA output signal. Designed for the measurement of hostile media in harsh industrial environments, the transmitters are available in a variety of pressure ranges from ± 15 through 0 to 300 psig.

The ST2000G4A Series features laser trimming and factory calibration to ensure field interchangeability without recalibration. The transmitters also feature a special diaphragm/oil-fill isolation technique that minimizes the amount of oil required for optimal performance. The transmitters can handle



extreme burst pressures—typically 10 times the normal operating pressure. A $\frac{3}{8}$ -in. NPT pressure-connection fitting accepts a variety of fit-


tings to meet almost any thread requirement, including metric, without unnecessary body-length extension.

All of the transmitters, which will operate from -40 to $+85^{\circ}\text{C}$, are temperature compensated within $\pm 1.5\%$ over the 0 to 70°C temperature range. Static accuracy, which includes linearity, hysteresis, and repeatability, is within $\pm 0.5\%$ of full scale. All ST2000G4As feature internal voltage regulation for operation with supply voltages from 12 to 30V dc. Pricing ranges from \$75 to \$125 (100).

SenSym, 1255 Reamwood Ave, Sunnyvale, CA 94089. Phone (408) 744-1500.

Circle No 393

Application-Specific Hybrid Packaging Solutions.

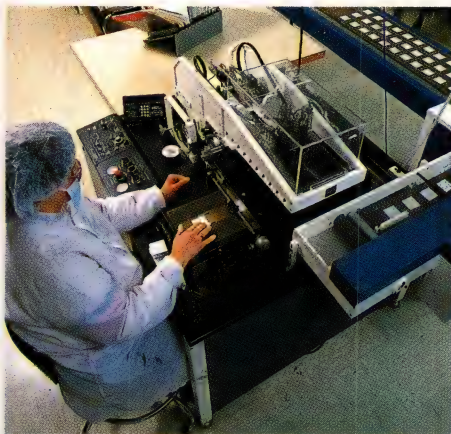

Our engineering staff can convert your circuit schematics or existing printed circuit boards into a thick-film or PCB-based hybrid circuit...which, when vertically integrated, increases your system functionality and reliability.

Our flexible, alternative hybrid packaging solutions can save you the hassle of ordering, testing, stocking and assembling components. You gain in overall system reliability, through fewer discrete components and fewer connections.

Philips Circuit Assemblies' hybrid circuits arrive 100% functionally tested and ready to integrate into your board-level product.


No capital investment.

When Philips Circuit Assemblies handles your total hybrid production, you get today's technology today...without long-term capital investments in process development and equipment.

To meet your system size and cost reduction goals with higher circuit reliability and fewer hassles, turn to America's largest supplier of custom thick-film hybrids — Philips Circuit Assemblies.

To get started, just call 1-800-522-7752 (in Wisconsin, dial 414/785-6359).

For our Capabilities Catalog, write to: Philips Circuit Assemblies, A Division of North American Philips Corporation, Corporate Advertising, 2001 W. Blue Heron Blvd., P.O. Box 10330, Riviera Beach, FL 33404.

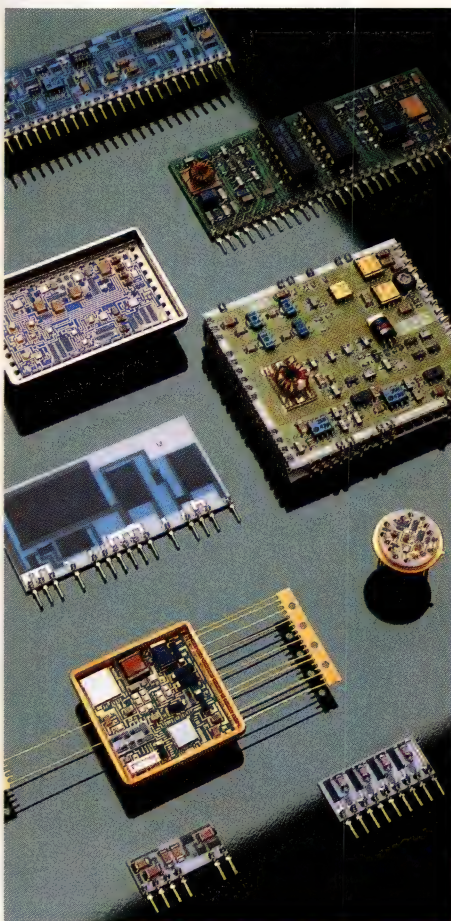


Philips Circuit Assemblies



16-bit DAC combines low cost and high accuracy

The AD1145 digital-to-analog converter (DAC) has a maximum differential nonlinearity of ± 0.75 LSB and a relative accuracy of $\pm 0.003\%$. These specifications compare with many other 16-bit DACs that have only 15 bits (or less) of accuracy. The two-chip hybrid also has a number of features that simplify the DAC-to- μ P interface.

You can load data into the DAC in a parallel mode for high-speed data transfers or in a serial mode to minimize wiring. Parallel loading accommodates 16 bits simultaneously or in two 8-bit bytes. The DAC can read back the data serially to ensure its validity. Double-buffered latches permit you to simultaneously update multiple AD1145s in multichannel applications, or you can make the input

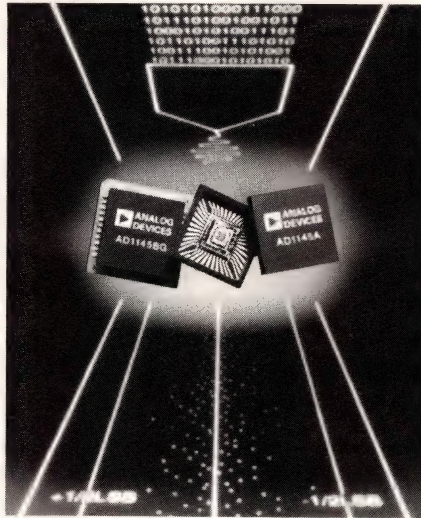

latches transparent for stand-alone operation. The DAC's output is reset to zero on power-up or upon command.

On-chip application resistors fa-

cilitate programming the output voltage ranges when the DAC is used with an external amplifier. The DAC's nominal output range is 0 to 5V. The 5V full-scale settling time is 6 μ sec to within ± 0.5 LSB. Digital input coding is binary for a unipolar output and offset binary or 2's complement for a bipolar output. Digital inputs are 5V CMOS/TTL compatible.

The AD1145 is available in accuracy grades of ± 0.75 LSB and 16-bit monotonicity over a 15 to 35°C temperature range, and ± 1 LSB and 15-bit monotonicity over the 0 to 70°C temperature range. Prices start at \$29.50 (100).

Analog Devices Inc., Box 9106, Norwood, MA 02062. Phone (617) 461-3643.

Circle No 394

Microwave motion-sensor module has an $11 \times 18^\circ$ beamwidth

The MSM10000 is a noncontact, motion-sensor module that combines a microwave transmitter/receiver with signal-processing electronics to detect objects moving within its detection pattern. The use of microwave energy at 10.525 GHz lets you use the unit in extreme industrial environments where dirt, dust, and humidity could reduce the effectiveness of other motion-detection technologies. The MSM10000, which features an $11 \times 18^\circ$ beamwidth, also permits the measuring of both metallic and nonmetallic objects and has the inherent ability to "see through" many optically opaque targets.

The internal circuitry, which includes a power supply, amplifiers,



a comparator, and an output switch, drives the microwave oscillator and converts the detected output to a switch closure. The switch closure provides an output of 60V/10 μ A in the off condition and 2.5V/500 mA in the on condition. The module


operates over a range of input voltages from 14 to 26V dc with a typical operating current of 350 μ A. The detection range is adjustable from 1 in. to 8 ft.

The \$250 MSM10000 comes in a plug-in module designed for easy incorporation into standard industrial enclosures. The cast aluminum horn antenna is protected by a window to seal out contaminants. The $4.375 \times 3.25 \times 2.875$ -in. unit plugs into a standard printed-circuit-board connector and is secured by four mounting screws on the antenna flange.

Alpha Industries, 20 Sylvan Rd, Woburn, MA 01801. Phone (617) 935-5150. FAX 617-935-4939.

Circle No 395

Tomorrow's manufacturing technologies today... without the investment.

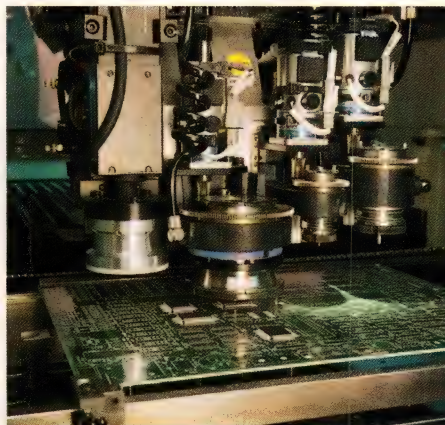

Philips Circuit Assemblies is your leading source for custom printed circuit board assemblies, subassemblies and complete box-level contract manufacturing of your electronic products.

We're specialists in PC board assembly, committed to long-term service to customers.


We'll work with you at any stage of product development — design the board to your specifications, adapt your existing circuitry to higher-density configurations, or reduce circuit size to meet system packaging goals.

Fast, economical solutions.

Our high-speed, flexible placement equipment can meet your most difficult demands — including high pin-count, fine-pitch placement. You take advantage of state-of-the-art technologies immediately, while reducing capital investment and limiting on-hand inventory costs.

Philips Circuit Assemblies provides you with both high-volume and low-volume turnkey manufacturing with total test capabilities — including in-circuit, functional, and burn-in. In addition, custom-designed hardware and software test systems can be developed for your specific requirements.

To learn more, write for our capabilities catalog: Philips Circuit Assemblies, A Division of North American Philips Corporation, Corporate Advertising, 2001 W. Blue Heron Blvd., P.O. Box 10330, Riviera Beach, FL 33404, or call 1-800-522-7752 (in Wisconsin, dial 414/785-6359).

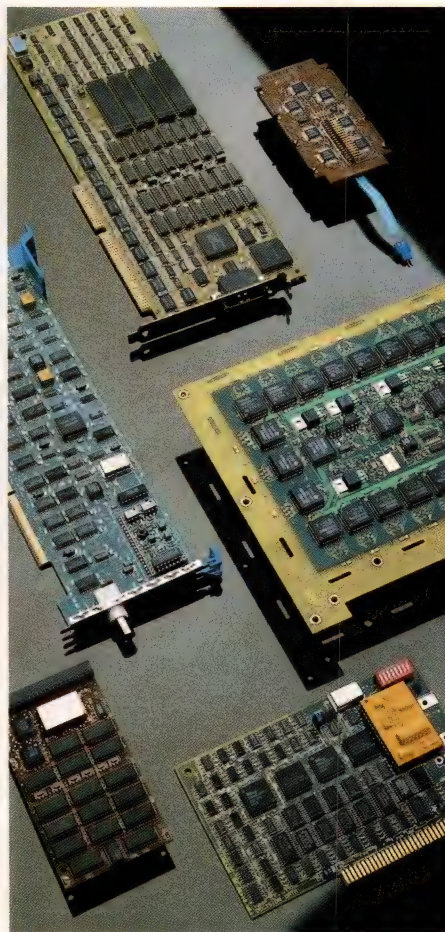

Philips Circuit Assemblies



TODAY'S **TEMPEST** APPLICATIONS HAVE CHOMERICS WRITTEN ALL OVER THEM

Exterior windows incorporate woven wire mesh or deposited metal EMI shields.

Keyboard shield prevents leakage of radiated EMI.

Clip-on combination double or triple layered wire mesh and elastomer gasket provides EMI shielding on cabinet doors and panels.

Molded-in-place conductive cover gasket provides integral EMI shield/environmental seal.

Honeycomb vent panel provides maximum EMI shielding and air flow.

Self-adhesive copper foil provides EMI shield beneath normal wall coverings.

EMI shielded raceway between equipment protects cables while providing easy access.

Chomerics CRT and display windows combine EMI shielding and glare reduction.

Whether your TEMPEST requirements are in military, institutional, or architectural applications, Chomerics' extensive experience will assure you the most cost effective EMI shielding in minimal time and with minimal expense.

At Chomerics we take a comprehensive program approach to TEMPEST protection. This approach, called "TEMPESTITE", starts at the initial system definition, proceeds through design/development/prototype, and ultimately to final TEMPEST

testing and certification.

Our unparalleled selection of standard TEMPESTITE™ EMI products provides the basis of most shielding solutions. For special situations, we have the capabilities to develop, test, and document performance of custom shielding products.

If you have a product or system that must meet TEMPEST requirements, you need Chomerics.

Circle the number below or call 617-935-4850 for additional information on our TEMPEST services.


CHOMERICS
a GRACE company

**LEADER IN EMI SHIELDING
INNOVATION, DESIGN, AND
TESTING TECHNOLOGY.**

77 Dragon Court
Woburn, MA 01888
Tel: 617-935-4850
TWX: 710-393-0173

© Chomerics, Inc. 1987

Components

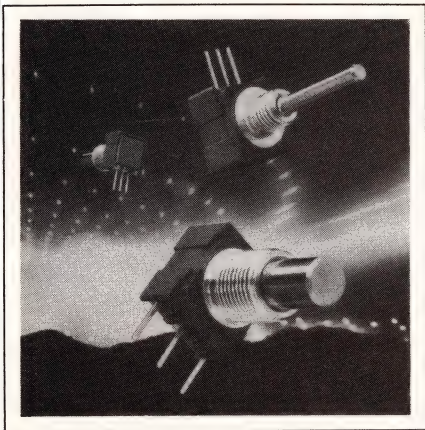

POTENTIOMETER

Featuring a 1/2-in.-square sealed package, the Model 50 panel control offers designers great flexibility where space is important. With a pc-board mounting bracket, the potentiometer can be easily installed and wave soldered. The Model 50, which has a rotational life of 50,000 cycles, can also serve as a drop-in replacement for other panel controls. Designers can select either conductive plastic or cermet elements, depending on resistance value and reliability needs. Standard resistance values range from 150 Ω to 1 M Ω in both linear and audio tapers. Depending on the element type, available tolerances are $\pm 5\%$, $\pm 10\%$ and $\pm 20\%$. Independent linearity is $\pm 5\%$, and contact-resistance variation is 2%. From \$1.75 (1000). Delivery, eight weeks ARO.

Bourns Inc, 1200 Columbus Ave, Riverside, CA 92507. Phone (714) 781-5500. TLX 676423.

Circle No 650

DRY-CIRCUIT RELAY

The TZ is a dry-circuit-type single X-bar contact pc-board-mountable relay. It features a 1500V ac breakdown voltage and a 3000V surge resistance between coil and contact. Contact material is silver palladium overlaid gold for dry-circuit switching. The relays will switch 1A at 24V dc or 120V ac. Coil voltage ratings range from 3 to 24V dc. Stan-

dard coil sensitivity at nominal operating voltages is 107 mA. The relays have a -25 to $+60^\circ\text{C}$ operating range and a 100,000 operations lifetime at rated load. The relays conform to UL, CSA, and FCC Part 68 requirements. \$0.96 (1000). Delivery, four to six weeks ARO.

Original Electric Mfg Co Inc, 123 Lincoln Blvd, Middlesex, NJ 08846. Phone (201) 271-5770.

Circle No 651



THERMOSTATS

The Series 6600 bimetallic thermostats are housed in gull-wing, leaded packages that are the same size as an 8-pin DIP. They have an spst, gold-plated contact that's available in either a normally open or normally closed configuration. The contact has a rating of 1A (resistive) at 48V dc. The thermostats can sense over a 40 to 120 $^\circ\text{C}$ ambient temperature range in 5 $^\circ\text{C}$ increments. The thermostats are compatible with pick-and-place equipment and are sealed to withstand wave-soldering and board-washing processes. \$3.30 (500). Delivery, stock to eight weeks ARO.

Airpax, Husky Park, Frederick, MD 21701. Phone (301) 663-5141.

Circle No 652


SENSOR SYSTEM

The LGI-LMS-001 sensor system consists of an ultrasonic level sensor that has a range of 35 ft and a control unit. The control unit powers the sensor and receives the digital

data from the sensor over a 50 Ω coaxial cable, which can be as long as 500 ft. The control unit compares the data against register data set by the operator and uses the information to control one or two pumps or sound an alarm in case of trouble. An LCD readout indicates the liquid levels and the pumps that are operating. The control unit prompts the operator for six register settings including low-alarm, pump 1 turn-on, pump 2 turn-on, pump 1 turn-off, pump 2 turn-off, and a high-alarm setting. The system features a 0.25-in. accuracy, a 0.1-in. resolution, and a -40 to $+60^\circ\text{C}$ temperature range. Internal battery backup, remote alarm relay, and a 4- to 20-mA output are optional. \$690.

Lagrange Instruments Inc, Kuchler Dr, LaGrangeville, NY 12540. Phone (914) 223-3336.

Circle No 653

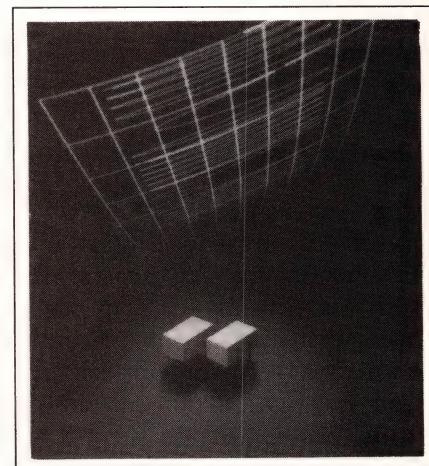

SWITCHING RELAY

The RK is a high-frequency switching relay with a 200-mW input sensitivity. A single-side stable device, the relay is sealed to accommodate dip-soldering processes. Nominal switching capacity is 10 mA at 24V dc. The 0.795 $\times$ 0.441 $\times$ 0.382-in. relay has a 1 Form C contact arrangement. Isolation at 1.5 GHz is 60 dB, and insertion loss at 900 MHz is 0.3 dB max. Coil voltage ratings range from 3 to 24V, and breakdown volt-

Components


age between contact and coil measures 1000V rms. One- and two-coil latching-type relays are also available. \$4.50 (500). Delivery, eight to 12 weeks ARO.

Aromat Corp, 629 Central Ave, New Providence, NJ 07974. Phone (201) 464-3550.

Circle No 654

CHIP CAPACITORS

The Type 14C multilayer ceramic-chip capacitors, which operate over the -55 to $+200^{\circ}\text{C}$ temperature range, are intended for surface-mount or hybrid applications that are subject to severe environments such as underhood automotive electronics. Manufactured in the com-

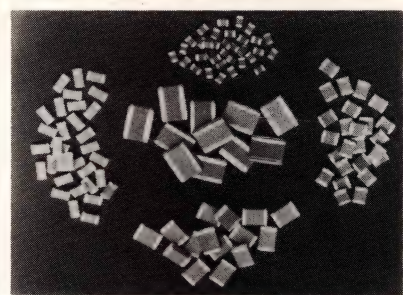

pany's proprietary wet-process ceramics technology, the chips offer high performance and high reliability. The capacitors, which have EIA characteristics X8S at 50V dc and X9T at 25V dc, range in value from 390 pF to $0.56\ \mu\text{F}$. Standard sizes range from 0805 to 1825. The devices are available in 8- or 12-mm tape-and-reel packaging to EIA-481A. Type 14C $0.1\text{-}\mu\text{F}$ capacitor, size 1210, \$0.19 (10,000). Delivery, eight to nine weeks ARO.

Sprague Electric Co, Box 9102, Mansfield, MA 02048. Phone (508) 339-8900.

Circle No 655

Turn Good Ideas Into Good Articles



With EDN's FREE Writer's Guide!

Would you like to get paid for sharing your clever engineering ideas and methods with your professional colleagues? If so, then send for EDN's new FREE writer's guide and learn how.

You don't need the skills and experience of a professional writer. And you don't need to know publishing jargon. All you *do* need are a little perseverance, your engineering skills, and the ability to communicate your ideas clearly.

Our new writer's guide takes the mystery and intimidation out of writing for a publication. It shows you how to write for EDN using skills you already have. Plus, it takes you step-by-step through the editorial procedures necessary to turn your ideas into polished, professional articles.

Get your FREE copy of EDN's writer's guide by circling number 800 on the Information Retrieval Service Card or by calling (617) 964-3030.

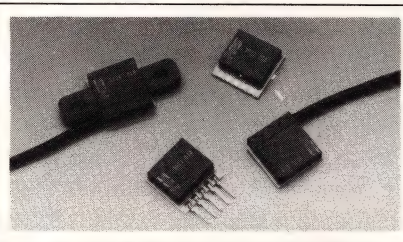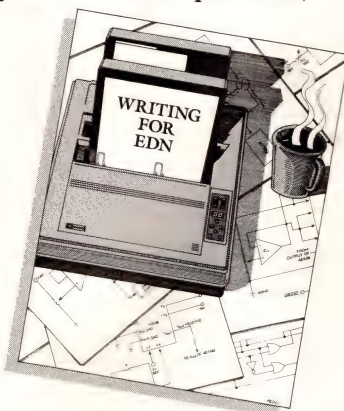

2G ACCELEROMETERS

With the addition of a $\pm 2\text{g}$ range, the 3021 and 3026 Series silicon accelerometers provide the highest sensitivity available in a low-cost, commercially available part, according to the vendor. The devices are also available in other standard ranges from ± 5 to $\pm 200\text{g}$. The 3021 and 3026 devices are general-purpose, solid-state, piezoresistive accelerometers on a ceramic substrate. The 3026 contains a mounting bracket that eases mechanical attachment. The 3031 comes in a surface-mount package for high-volume OEM applications. The 3110 uses the same sensing element and

TEK'S \$2995 LOGIC ANALYZER. NOW WITH SUPPORT FOR MORE THAN 20 MICROPROCESSORS.

Only the Tek 1230 lets you start with an entry-level logic analyzer—then, as time goes on, add channels and draw from a comprehensive list of 8- and 16-bit micro support.

The most recent additions to the 1230's long list of supported micros include Intel's

80286 and 8096 and Motorola's 68332, 68010 and 68HC11.

Bus analysis is also part of the 1230's exceptional support package.

Installation of probes and personality modules is

effortless; the disassembly itself is more complete and informative than anything else in its class. You can have a complete 8-bit micro-processor debug package, including logic analyzer, for under \$4000, and a 16-bit package for under \$6000.


Start with 16 channels. Expand in 16-channel increments to a maximum of 64.

On-screen help notes, pop-up menus and automatic prompts make the 1230 exceptionally easy to learn

and use. Yet you can access features like four 2K deep memories, sophisticated triggering and built-in babysit-

ting mode that are unprecedented in this price range.

Call 1-800-426-2200 for rapid ordering, to get your technical questions answered, or to request product information. **UL Listed**

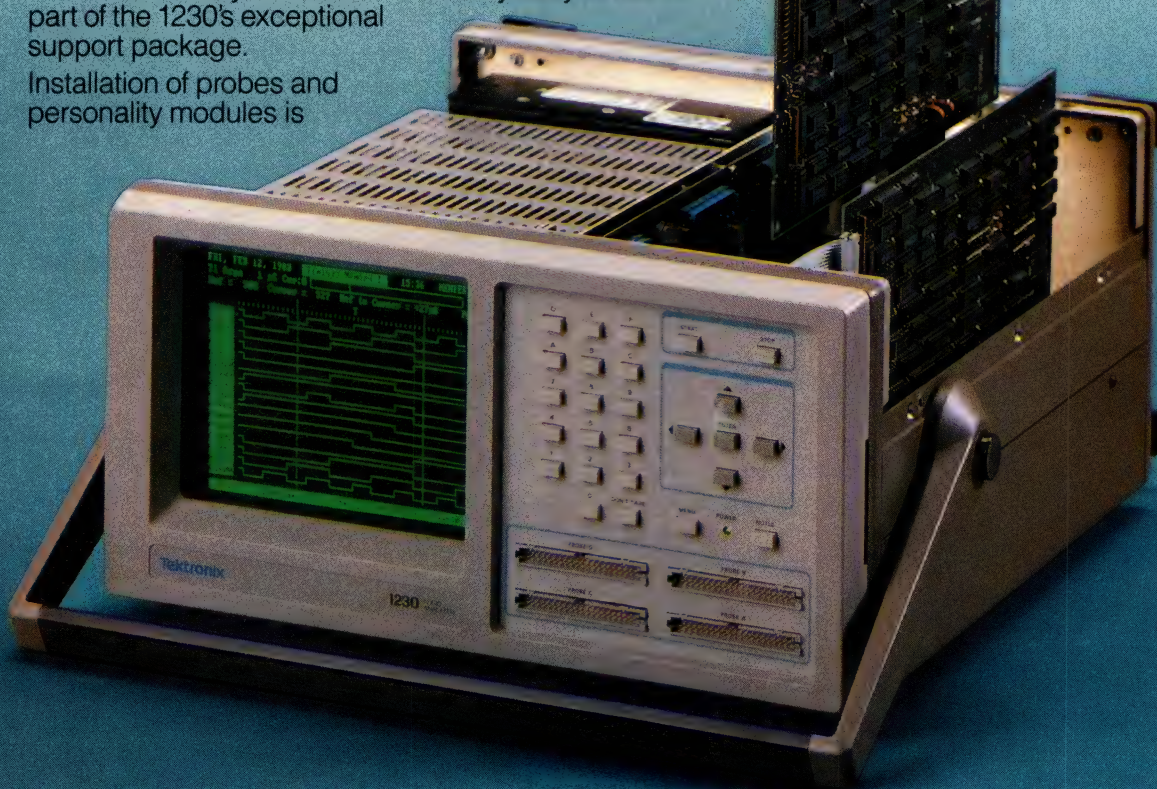

To order now, call (800) 426-2200. VISA, MasterCard accepted.

Tektronix
COMMITTED TO EXCELLENCE

Components


is a signal-conditioned, instrument-grade version that adds temperature compensation and amplification. In sample quantities, \$77 to \$268; 3031, \$5 (OEM qty).

IC Sensors, 1701 McCarthy Blvd, Milpitas, CA 95035. Phone (408) 432-1800.

Circle No 656

20-MHz FLASH ADC

The MN5820 8-bit, 20-MHz flash A/D converter contains, in a single package, all of the support circuits needed to implement flash conversion. Moreover, these support circuits are user configurable. Included in the MN5820 is a bandgap voltage reference, a top voltage-

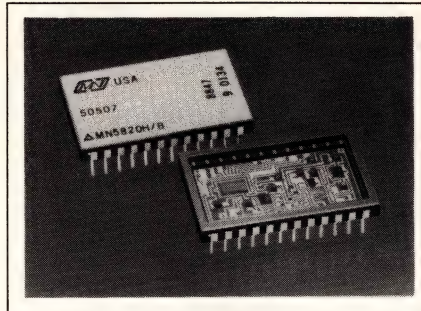

reference (VRT) amplifier, a bottom voltage-reference (VRB) amplifier, an analog-input buffer amplifier, and a 75Ω termination resistor.

The 1.2V bandgap reference is brought out for use with the inputs of the VRT and VRB amplifiers when selecting the MN5820's full-scale range of 0 to 1V, 0 to -1V, or $\pm 1V$. You can use the analog-input amplifier to buffer the complex input impedance associated with the flash A/D converter. The 20-MHz flash ADC contains an output 3-state buffer and an overrange flag. The MN5820 comes in a hermetic, 24-pin, double-wide DIP. Commercial version, \$150; military version, \$233 (100). Delivery, 12 to 16 weeks ARO.

Micro Networks, 324 Clark St, Worcester, MA 01606. Phone (508) 852-5400.

Circle No 657



EG&G

VACTEC
OPTOELECTRONICS

With EG&G Vactec LDR's there has never been a lead interconnect failure reported. The reason: superbly designed IBM lead pinners.

Automatic testers 100% test and characterize each unit (twice) to provide the precise performance you specify.



LIGHT DEPENDENT RESISTORS

(Photoconductive Cells)

World-class high-speed automation provides superb quality at very competitive prices. (You might say the cost is peanuts.) Over 1/3-billion already shipped to EG&G Vactec customers worldwide—a testimonial to their dependability.


APPLICATIONS:

- Use like any variable resistor—LDR resistance is inversely proportional to illumination.
- ON-OFF controls for day/night operation—general lighting, street lighting, controls, signs, safety equipment.
- Automatic adjustment of brightness of displays in automotive accessories, instruments, clocks, appliances, and TV sets.

Call or write for more information:

EG&G Vactec, Inc. • 10900 Page Blvd. • St. Louis, MO 63132
(314) 423-4900 • TWX 910-764-0811 • FAX 314-423-3956

CIRCLE NO 114

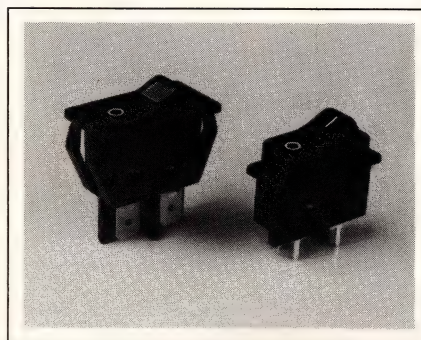

ROCKER SWITCHES

The 1550 Series rocker switches carry 16A ratings and are available in single-pole and double-pole versions. Both versions fit into a standard single-pole housing. The switches are available in both lighted and unlighted models and

We've put CMOS on display.



If you're looking for the right LED display solution, take a look at HP. We've got a full line of low-power, easy-to-use alphanumeric CMOS displays.

All featuring an integrated on-board CMOS IC. And all designed to provide you with a better way to meet your display requirements.

Take our eight-character 5 x 7 smart alphanumeric display, for example. It's the industry's only customizable display. With up to 16 user-defin-

able characters and the capability to generate foreign characters, special symbols and logos.

Or choose from four-character 5 x 7 CMOS displays in all four LED colors.

Smart 16-segment displays with built-in RAM, ASCII decoder and LED drive circuitry. Which also come in a drop-in 5 x 7 dot-matrix upgrade.

And single-character red hexadecimal displays with a 4 x 7 dot-matrix display.

Best of all, they're from HP. So you're always assured of HP's commitment to excellence in service, support and reliability.

For a free brochure describing our full line of CMOS display solutions, call **1-800-752-0900 ext. 233H**. And see how easy it is to shine.


There is a better way.



**HEWLETT
PACKARD**

ic[®] RZS

High Frequency Electrolytic Capacitors

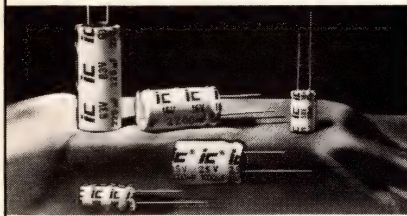

Proven Reliability
... 100% Burn-In Tested

- 22 Mfd. to 2,200 Mfd.
- 6.3 WVDC to 63 WVDC
- -55°C to +105°C
- $\pm 20\%$ Std. ($\pm 10\%$ Opt.)
- High Ripple @ 100KHz
- Solvent Tolerant Seal Std.
- Low ESR, Low ESL
- Tape & Reel Available

ic[®] TECH TIPS

ic type RZS is designed for a wide range of applications including high frequency filtering, high temperature ambients (up to +105°C), sinusoidal and nonsinusoidal waveforms, high ripple currents, and extremely low temperature (-55°C) environmental applications. Type RZS offers the high reliability desired in automotive, telecommunications, industrial process control, medical instrumentation and power supply applications. Featuring excellent electrical characteristics across the entire temperature and frequency range including very low impedance, type RZS is designed for long life operation. The low ESL design provides high frequency performance beyond 100KHz. The low ESR characteristics across the temperature and frequency range yield reliable cool operation at high ripple current levels. The solvent tolerant end seal design is perfect for use with many modern circuit board cleaning systems. Type RZS gives the designer a wide range of characteristics to choose from in a single series.

©1987 ILLINOIS CAPACITOR, INC.

**The source for Quality.
Performance and Delivery.**

ic[®]
ILLINOIS CAPACITOR, INC.
3757 West Touhy Avenue
Lincolnwood, Illinois 60465
(312) 675-1760


CIRCLE NO 116

Components

feature quick-connect, solder, or printed-circuit terminal options. The switches may be subpanel mounted or snap-in front-panel mounted, and carry all international approvals. \$2 and under. Delivery, stock to eight weeks ARO.

Marquardt Switches Inc., Box 465, Cazenovia, NY 13035. Phone (315) 655-8050. TLX 703287. FAX 315-655-8042.

Circle No 658

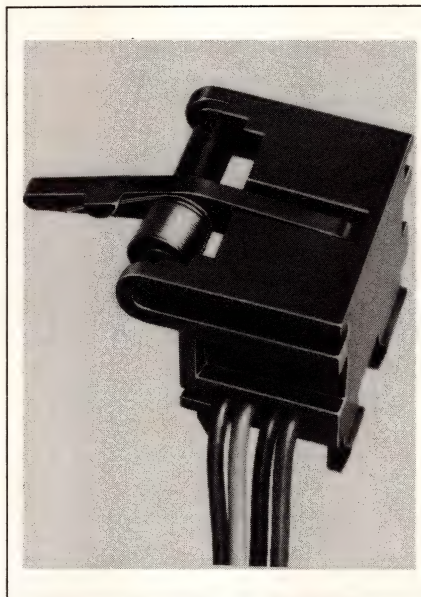

OPTICAL FLAG SWITCH


The OPB850 optical flag switch consists of an npn phototransistor coupled with a GaAs or GaAlAs infrared light-emitting diode in a molded plastic housing. A lever-arm-actuated flag interrupts the light beam, switching the transistor output between states that can readily drive logic gates. The device features snap-in mounting to allow easy replacement of mechanical, lever-operated switches. The OPB850 snaps into a rectangular opening of $0.315 \times 0.472 \times 0.039$ in. The company can design customized lever arms and spring torques for specific applications. \$2.44 (1000).

Optek Technology Inc., 1215 W Crosby Rd, Carrollton, TX 75006. Phone (214) 323-2200.

Circle No 659


WHEN PRECISION AND PERFORMANCE ARE CRITICAL, CHECK DELEVAN

☒ **For Custom-Engineered Surface Mountable Coils and Inductors:**

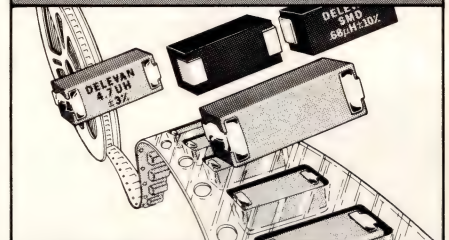

- 1%, 3% Tolerance for Unshielded Matched Parts, 0.022μ H to 1000μ H
- 5% Shielded, from 0.1μ H to 560μ H

☒ **For MICRO-i[®] chip inductors for hybrid circuits**

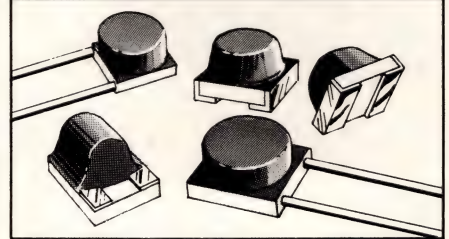

- Qualified to MIL-C-83446/4 MS 21367
- Chips, wire bondable ribbon leads or reflow solder pads
- .010μ H to 1000μ H

For the ultimate in engineering capability:

- Tight tolerance - 1%, 3%, 5%
- Laser marking
- Custom values
- Environmental lab qualification
- SPC program
- Hi-reliability performance

For fast answers to your really tough application problems call (716) 652-3600; Telex 91-293; Fax (716) 652-4814



DELEVAN / SMD Divisions
AMERICAN PRECISION INDUSTRIES
Electronic Components Group

270 Quaker Road,
East Aurora, NY 14052-0449

MADE IN AMERICA BY AMERICAN CRAFTSMEN
TO AMERICAN STANDARDS OF EXCELLENCE


CIRCLE NO 117

EDN July 20, 1989

NEW DUAL CURRENT SOURCE SIMPLIFIES CIRCUIT DESIGNS.

Versatile Circuit Building Block

Our new REF200 dual current source improves performance, simplifies designs, saves board space, and cuts costs in a wide variety of circuits. Try it for low voltage references, sensor excitation, precision biasing, op amp offsetting, duty-cycle modulation, current sinking, even precision waveform generation.



Low Cost, High Accuracy

REF200 combines two $100\mu A$ current sources and a current mirror on a single chip. The three sections are dielectrically isolated from each other and laser trimmed for high accuracy. The sections can be easily pin-strapped to produce currents of $50\mu A$, $100\mu A$, $200\mu A$, $300\mu A$, and $400\mu A$. With simple external components, virtually any current can be obtained.

Key features include:

- 0.5% accuracy
- 22ppm/ $^{\circ}C$ drift
- wide 2.5V to 40V compliance voltage
- 500M Ω output impedance
- 8-pin TO-99 plastic DIP, or plastic SOIC

FREE Applications Guide

In developing this part, we learned a lot about current sources. We put it all in our *Current Sources Applications Guide*, covering not only the REF200 but other approaches as well. Both the *Guide* and the product data sheet are available now from your Burr-Brown sales representative.

Burr-Brown Corp.,
P.O. Box 11400,
Tucson, AZ 85734
FAX (602) 889-1510



We're Building On A Proven Product Line...

You know Schaevitz as the leading source for LVDTs. With more than 400 standard designs, we have the right transducer for your linear displacement applications... and we keep making them better.

Our standard LVDT line offers:

- Ranges to 20", AC/DC models
- Linearity to $\pm 0.05\%$; infinite resolution
- Operation in extreme environments
- Compatible LVDT instrumentation


...To Bring You New Technology

Recent product developments at Schaevitz include an affordable DC-operated LVDT. This new generation sensor offers improved performance at a lower price tag than previous units. We've also extended our reach into linear position sensing with technology capable of long stroke measurement to 120".

To find out more about our linear displacement sensors and other Schaevitz products, call our **Hot Line: 609/662-8008** or write Schaevitz, 7905 N. Route 130, Pennsauken, NJ 08110-1489.

Grid Scale: $\frac{3}{8}$ " x $\frac{3}{8}$ "

Solid Solutions for Linear Position Sensing

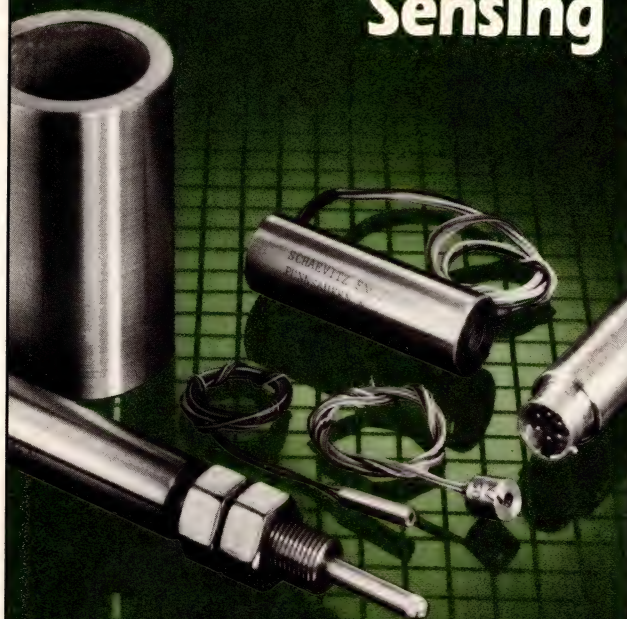


schaevitz

The Name In Sensor Technology
609/662-8008

CIRCLE NO 119

Components

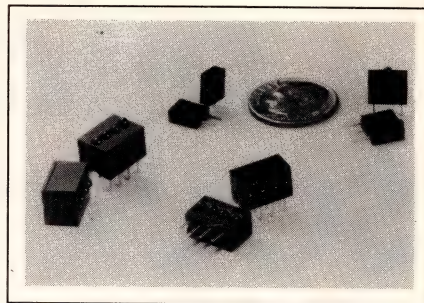

LOW-CURRENT LEDs

The 555 Series LEDs feature a luminous intensity of 0.6 mcd at 1 mA of current—in contrast to other LEDs that require 10 mA of current for the same luminous intensity. The increased efficiency is due to the use of a GaAlAs chip instead of the traditional GaAlP chip. The light source, which emits red light, was developed primarily for use with low-current gate outputs. The LED incorporates a current-limiting resistor to protect sensitive CMOS-driven circuitry. Designed for wave-soldering applications, the 555 Series comes in a variety of packages: right-angle; upright; Quad Bloc right-angle; and Quad Bloc upright. Model 2009, \$0.62; Model 3009, \$0.89; Model 4009, \$1.93; Model 5009, \$2.02 (1000).

Dialight Corp., 1913 Atlantic Ave, Manasquan, NJ 08736. Phone (201) 223-9400.

Circle No 660



HYBRID AMPLIFIERS

Available in five performance ranges, the 90178X line of RF hybrid amplifiers features screening that's in full compliance with MIL-STD-883. The manufacturing facility is certified to MIL-STD-1772.

Thanks to Elantec, ATE design engineers are no longer kept waiting on pins and needles.

With Elantec pin drivers and FET input buffers, the ATE industry can stop sitting on the edge of their seats.

Whether it's for IC or loaded PC board testers, our parts are higher performing than the competition. Not to mention more affordable.

As are Elantec analog ICs for all applications—from ATE, video and LANs, to instrumentation, disk drives, and more.

One product that pins down the fastest logic devices is our FET input EL2031 buffer amplifier. It drives $7000\text{V}/\mu\text{s}$ signals into 100 ohm loads. Or buffers those signals at the pin receiver.

Another example is our EL2021 monolithic pin driver. It supports in-circuit and functional testing with a programmable slewrate to $250\text{V}/\mu\text{s}$.

Plus it drives externally programmed voltages into difficult and reactive loads



and overdrives device outputs in the middle of loaded PC boards. Best of all, the

EL2021 costs less, so you can afford a part per pin and eliminate multiplexing.

For all high-performance applications, look to the full family of Elantec high-speed analog products. Everything from amplifiers and buffers, to comparators and transistor arrays. Each backed by the industry's only two-for-one guarantee. Elantec, analog that's ahead of the times.

There's No Wait For A Selection Guide. For your free copy, circle the bingo number or write Elantec.

Because when it comes to designing PC board or IC testers, you'll never need to be needled again.

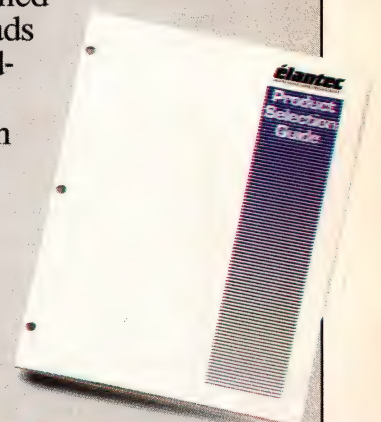

elantec
HIGH PERFORMANCE ANALOG INTEGRATED CIRCUITS

Elantec: 1996 Tarob Court, Milpitas, CA 95035. Telephone: (408) 945-1323, Fax: (408) 945-9305 © 1989 Elantec
European Sales: 87 Jermyn Street, London, SW1Y6JD, England. Tel: 44-1-839-3841, Telex: 917835, Fax: 44-1-930-0751


Components

The amplifiers, which are manufactured using thick-film technology, are cascaded 2-stage devices with transformer-coupled outputs to provide high output power under low bias-current conditions. Operating from a 12V supply, the 90178X hybrids offer gains of 24, 30, and 31 dB from 1 to 30 MHz, and gains of

21 and 31 dB from 2 to 150 MHz. The power output at 1 dB of compression ranges from 0 to 17 dBm. \$125 to \$140 (small qty).

CTS Corp, Microelectronics Div,
1201 Cumberland Ave, West
Lafayette, IN 47906. Phone (317)
463-2565.

Circle No 661

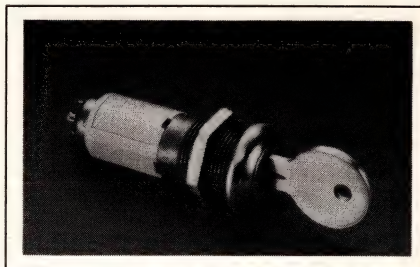



KEYLOCK SWITCH

Available with as many as six tumblers and in 1- or 2-pole versions, the Series 500 keylock switch provides as many as 12 switching positions. Rotational life can exceed 25,000 rotations at low currents. The sealed, explosion-proof switch has a firm detent with indexing at 30, 36, 45, and 90°. Five-disk keying is standard; 6-disk keying is available. Terminal contacts are silver alloy on copper alloy and gold plated. Single-pole version, \$8.50; double-pole version, \$13 (1000). Delivery, 12 weeks ARO.

Oak Switch Systems Inc, Box 517, Crystal Lake, IL 60014.
Phone (815) 459-5000.

Circle No 662

SMART SWITCH... SMART CHOICE

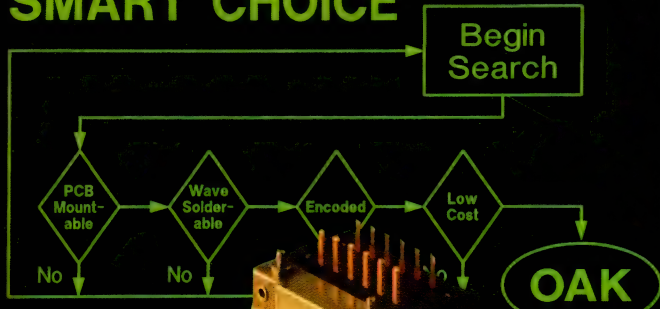

from Oak!

Oak's complete family of high-quality programmable, subminiature, keylock, lever and open and closed-frame rotary switches provide the multi-function accuracy and intelligence you need in sensitive switching applications. These rugged and reliable switches come in a variety of standard sizes and can be custom engineered to meet any design parameters.

All Oak rotary switches are designed to provide precise, consistent and highly-reliable contacts - cycle after cycle - most of them are qualified to MIL-S-3786. In addition, many feature Oak's patented Unidex® detent system with dual-wiping, self-cleaning contacts.

Oak rotary switch options include:

- Fixed or adjustable stops and a variety of indexing options
- Solder or PC board terminations in parallel or perpendicular configurations
- Sealed or unsealed
- Spring returns or solenoid selectors
- Dual concentric shafts

Oak's 50 years of rotary switch design and manufacturing experience is your assurance of quality. Specify Oak rotary switches for your next application. Call for a complete catalog! **815/459-5000.**


Oak is the smart choice for smart switches.

OAK Switch Systems Inc.

Your Partner in Excellence

P.O. Box 517 • Crystal Lake, Illinois 60014


CIRCLE NO 122

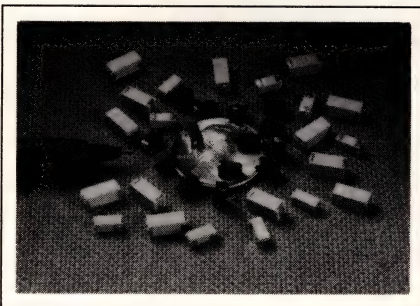

MINIATURE INDUCTORS

Following the industry trend toward smaller-size inductors, Series 1808 surface-mount inductors provide inductance values from 0.01 to 150 μ H. The devices have a standard tolerance of $\pm 10\%$, with closer tolerances available on special order. Manufactured on either phenolic, iron, or ferrite coil forms, the inductors are molded in flame-retardant epoxy in a rectangular configuration, which simplifies pick-and-place assembly. All parts are

TDK Ferrite Technology Blocks out EMI/RFI

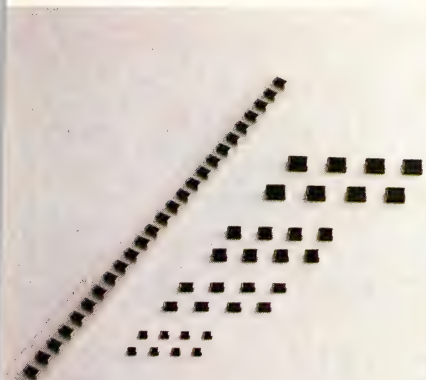

Ferrite Chip EMI Suppressor
ACB Series



Ferrite Bead Cores
BB Series



Ferrite Beads
Axial-lead taped type


Ferrite Core for EMI/RFI

For electronic equipment electromagnetic interference is a major concern. That's why so many turn to TDK for assistance. TDK, the ferrite expert has been researching EMI for years. And now, backed by the full complement of TDK ferrite material technology, our products are ready to protect your products from EMI/RFI.


With its phenomenal EMI absorption properties, ferrite was destined to lead the charge against EMI/RFI. And TDK ferrite cores comprise a rich μ_{iac} 45-2700 material composition. They also come in multiple configurations for maximum protection over a wide range of frequencies.

TDK offers you a wide selection of ferrite products from which to choose, ferrite bead cores, chip-type bead cores, a newly developed multi-hole ferrite substrate MH series, and angular cores for flat cables. All are highly effective in eliminating EMI on circuit boards and between interfaces, as well as preventing undesirable signal feedback and interfering oscillation. All of TDK's EMI/RFI products boast high quality materials, and are fabricated according to integrated production processes. Naturally, all of our ferrite products carry the TDK guarantee of reliability, and are suitable for a variety of applications, including advanced computers, automobile electronics, and OA and FA equipment.

If you're ready to fight noise in the electronic environment, it's time you got to know TDK!

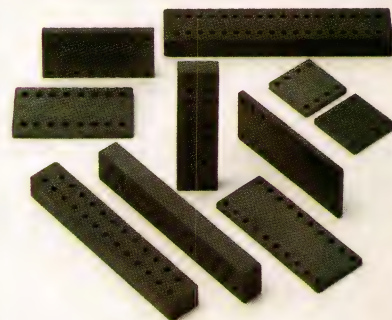

For ICs and Connectors
EMI Suppression Multi-hole Substrate

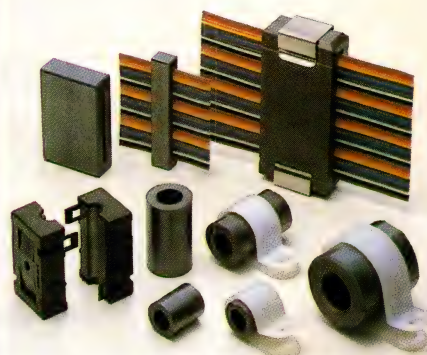

For cables
EMI Suppression Ferrite Cores



Ferrite Toroidal Cores for EMI/RFI Filters



CEL, TDK's Component Engineering Laboratory in Torrance, CA, is at your service. Phone (213) 530-9397.

TDK Electromagnetic Compatibility Technology — At Your Service!



TDK CORPORATION OF AMERICA HEAD OFFICE 1600 Feehanville Drive, Mount Prospect, IL 60056, U.S.A. Phone: (312) 803-6100 **CHICAGO REGIONAL OFFICE** Phone: (312) 803-6100 **INDIANAPOLIS REGIONAL OFFICE** Phone: (317) 872-0370 **NEW YORK REGIONAL OFFICE** Phone: (516) 625-0100 **LOS ANGELES REGIONAL OFFICE** Phone: (213) 539-6631 **DETROIT DISTRICT OFFICE** Phone: (313) 353-9393 **NEW JERSEY DISTRICT OFFICE** Phone: (201) 736-0023 **BOSTON DISTRICT OFFICE** Phone: (508) 624-4262 **HUNTSVILLE DISTRICT OFFICE** Phone: (205) 464-0222 **GREENSBORO DISTRICT OFFICE** Phone: (919) 292-0012 **DALLAS DISTRICT OFFICE** Phone: (214) 506-9800 **SAN FRANCISCO DISTRICT OFFICE** Phone: (408) 437-9585 **TDK CORPORATION**, TOKYO, JAPAN.

Components


laser marked for easy identification and are available in bulk or in 12-mm tape-and-reel packaging. \$0.40 to \$0.60 (100).

American Precision Industries, Delevan/SMD Div, 270 Quaker Rd, East Aurora, NY 14052. Phone (716) 652-3600.

Circle No 663

BINARY-CODED SWITCH

The Series 26 1/2-in.-diameter, binary-coded-output rotary switch is rated for 25,000 cycles when switching logic-level loads. Although the switch has 16 positions, its adjustable stop feature lets the user create a 10-position, BCD-code output or an 8-position, octal-code output.

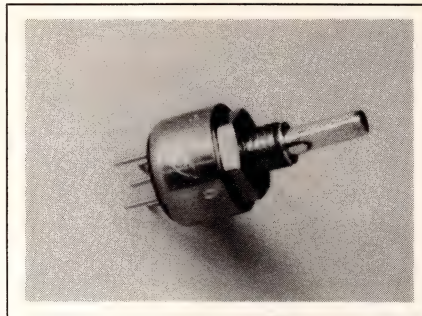


By adjusting the location of the stops, you can isolate any portion of the binary code and use it as the output. The Series 26 switch features a shaft- and panel-seal and shorting-type contacts. \$6.52 (100). Delivery, four to six weeks ARO.

Grayhill Inc, 561 Hillgrove Ave, La Grange, IL 60525. Phone (312) 354-1040.

Circle No 664

Low Cost Difference Amp Isolates $\pm 10V$ Signals From $\pm 200V$ CMVs

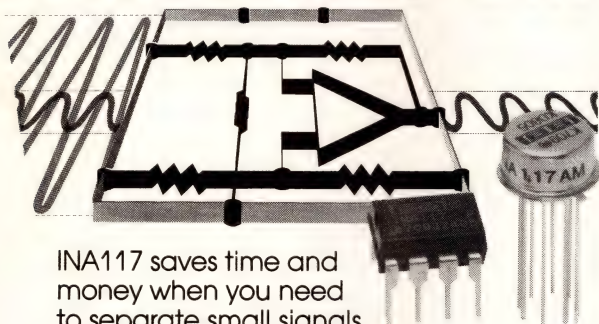


INA117 saves time and money when you need to separate small signals from large common-mode voltages. It's an excellent choice for power monitoring, data acquisition input buffering, and similar applications where total galvanic isolation is not required.

- $\pm 200VAC/DC$ common-mode range
- 86dB min CMR
- unity gain, 99.98% accuracy
- 0.001% max nonlinearity
- Com, Ind, and Mil temp ranges

Burr-Brown Corp., P.O. Box 11400, Tucson, AZ 85734 USA
FAX (602) 741-4395



CIRCLE NO 124

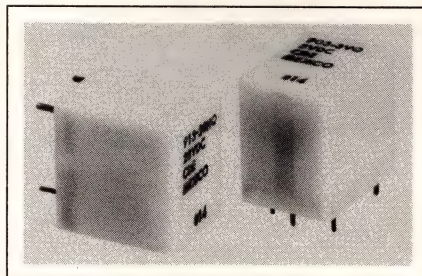

MINIATURE RELAYS

The 900 Series miniature relays occupy a volume of approximately 0.58 in.³ and are designed for high-density packaging with a low profile on pc boards. Stock units are furnished with contacts to switch 2, 5, and 10A at 120V ac/28V dc. Contact forms are available in 1A (spst-NO), 1B (spst-NC), and 1C (spdt). Stock relays come with 1C forms and are available with 6, 12, or 24V dc coils. The 900 Series relays offer four different footprints and coil sensitivities of 360 and 180 mW. Covers are available in nylon and Flamex material. \$1.25 to \$1.50 (1000). Delivery, four to six weeks ARO.

Cornell Dubilier Electronics, 2314 M L King Ave, Calexico, CA 92231. Phone (619) 357-3441.

Circle No 665



SENSR
CNTCT

HOOK
VERFY

ACSTS
REF
MARK

NVG COMPATIBILITY FROM THE PILOT'S POINT OF VIEW.

Day or night, pilots see exactly the information they need with Korrry's new NVG-compatible switchlights and panels. Clearly and comfortably, without hot spots or light leaks. All thanks to the most uniform brightness—and the truest red—in the entire industry.

Today, Korrry NVG-compatible switchlights are being used by pilots flying the Black Hawk HH-60H, the world's first production-version MIL-L 85762-compliant Helicopter Combat System.

Even in direct sunlight, pilots see sharp, high-contrast legends of green, yellow, and red, through ANVIS or Cat's Eyes goggles.

Look at NVG-compatible switchlights and panels from the pilot's point of view. We think you'll agree on Korrry, today the leader in NVG—and for over fifty years the leader in all customized illuminated cockpit information and control systems. Call (206) 281-3563 today for additional information.

CRITON KORRY


CIRCLE NO 125

Components

(ADVERTISEMENT)

More quality switching components from P&B


Circuit Breakers



P&B circuit breakers provide the quality you need at a price you can afford. Both thermal and magnetic types are available, and many are UL recognized as supplementary protectors and CSA certified as appliance component protectors.

CIRCLE NO 127

General Purpose Relays



One of the broadest lines of general purpose relays in the industry is offered by P&B. Open and enclosed styles are available with various contact materials, contact arrangements, termination styles and coil voltages.


CIRCLE NO 128

Time Delay Relays



P&B time delay relays combine precision, solid state timing circuits with our proven electromechanical relays. A wide selection of timing functions, timing ranges, degrees of precision and package styles permits you to select a unit with just the features you need.

CIRCLE NO 129

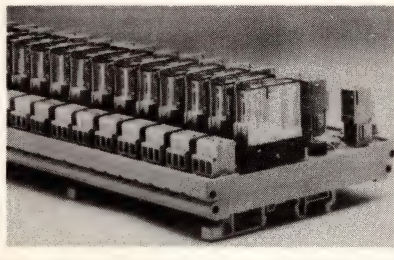

RELAY MODULES

Series 20.000 relay interface modules simplify the design and packaging of programmable-controller output circuits. Available with 4, 8, or 16 plug-in relays, the modules snap-mount onto DIN-1 and DIN-3 mounting rails. Relay input coils, rated for both ac and dc voltages, operate at 24, 48, 110 to 127, and 220V. Each relay in the module has one spdt output contact rated at either 10 or 16A. Built-in LEDs provide relay status and indicate the ac or dc input voltage. 8-relay module, \$138.32 (5).


Entrelec, 2 Ram Ridge Rd, Spring Valley, NY 10977. Phone (914) 425-7460. FAX 914-425-8108.

Circle No 666

ing range spans 0 to 70°C. Custom units with special buffering and delay times are also available. \$2.26 (1000). Delivery, stock to six weeks ARO.

PCA Electronics Inc, 16799 Schoenborn St, Sepulveda, CA 91343. Phone (818) 892-0761. FAX 818-894-5791.

Circle No 667

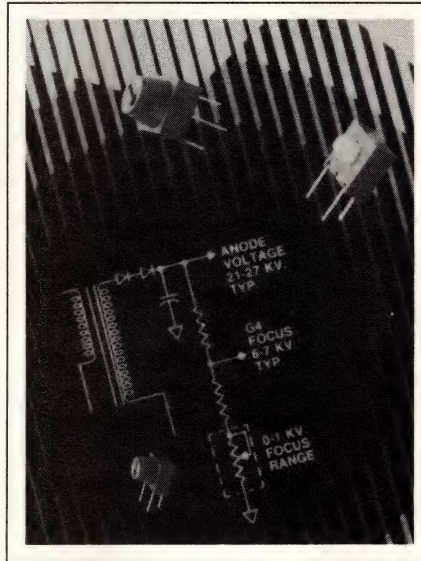


TRIMMERS

Designed for CRT adjustment applications, Model 3386-HV1 trimmers have a 1-kV max voltage rating. They feature an O-ring seal to provide reliable operation under dusty and humid conditions. Standard resistance values are 2.5 and 5 M Ω . Key specifications include a ± 150 -ppm/°C temperature coefficient, a 1% max contact resistance variation, and a 200-cycle min lifetime. Adjustability in the voltage divider and rheostat modes equals ± 0.5 and $\pm 0.15\%$, respectively. Standard knobs are available in white or blue; red knobs are optional. \$1.01 (1000). Delivery, stock to eight weeks ARO.

Bourns Inc, 1200 Columbia Ave, Riverside, CA 92507. Phone (714) 781-5500. TLX 676423.


Circle No 668

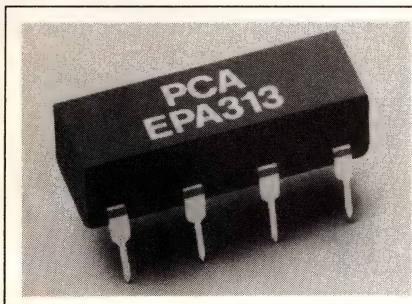

DELAY LINES

EPA313 Series delay lines provide three separate TTL-compatible delay lines in a single 14-pin DIP. Each of the delay lines in the 42 standard units have identical delay times ranging from 5 to 250 nsec $\pm 5\%$ or ± 2 nsec, whichever is greater. Each delay line includes an input and an output buffer. Fan-out for the output buffer equals 20 TTL loads for the high level and 10 TTL loads for the low level. Output rise time measures 4 nsec max. Operat-

Specify P&B for dry circuit to 30A load switching on your P.C. board.

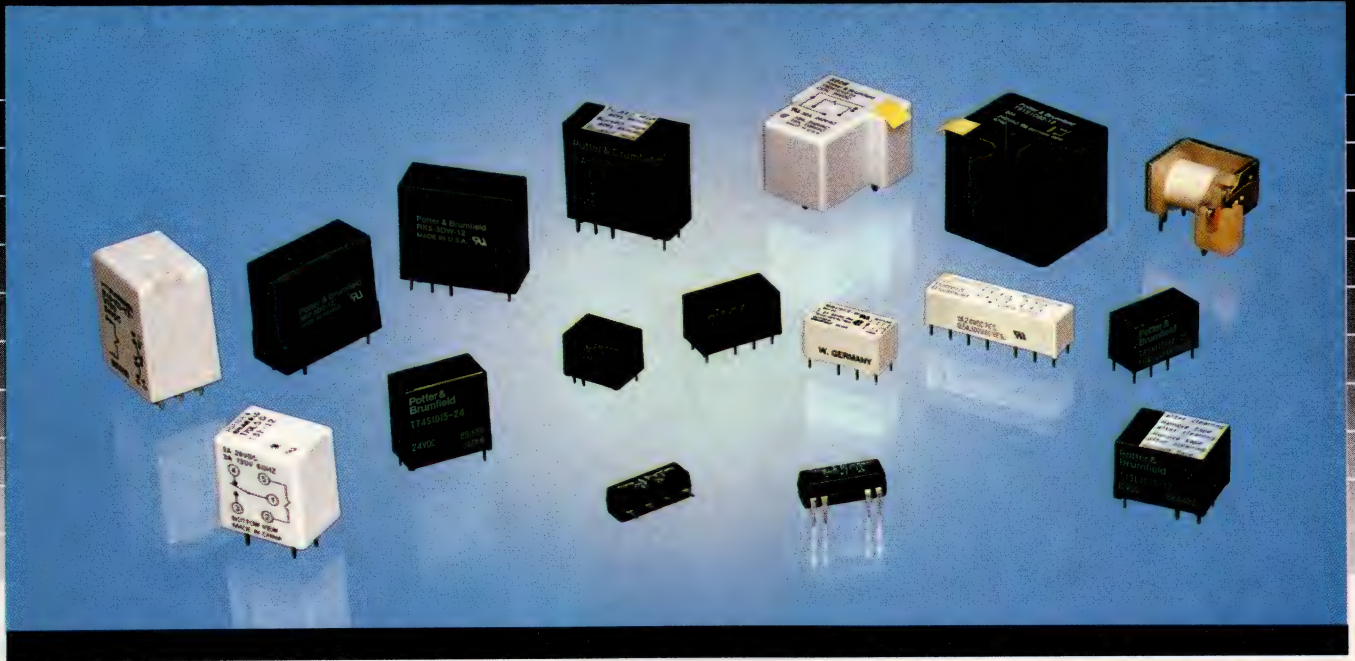

New Models Expand Offering

Potter & Brumfield's expanded line of printed circuit board relays provides the features you need – whether you're switching dry circuits or 30A loads. New products, traditional P&B quality and unbeatable service combine to help solve your toughest relay design-in problems in telecommunications, appliance, industrial control and other applications.

Miniature Relays Switch 1mA to 10A

New T73 and T74 series miniature P.C. board relays join the T70 series as Potter & Brumfield's low-cost SPDT units for general purpose applications. Various contact materials permit these immersion cleanable relays to switch from 1 mA through 10A. Sensitive coil models are available.

Expanded Line of 4,000V Isolation Relays

Extensions to the line of RK series relays feature 8mm coil-to-contact spacing for 4,000V isolation. SPDT models switch loads to 20A, while DPDT models switch up to 5A. Both sealed and unsealed types are now offered with either AC or DC coils.

T90 & T91 – 30A Workhorses

T90/T91 series relays have SPDT contacts for loads to 30A. The DC coil T90 is offered as an open-style

or sealed relay. The T91 is available with a DC coil, and it's offered with quick connect terminals for load connections. An AC coil T91 will be available soon.

More Models for Low Signal Switching

The growing line of P&B low-signal relays features units with single or multiple contacts to provide dependable switching of 2A and under loads. Both polarized and non-polarized units are offered in various coil sensitivities. Included are immersion cleanable DIP and SIP types.

Stock Availability

Many models are available off-the-shelf from your authorized P&B distributor. Of course, distributor stock is backed by Potter & Brumfield's extensive factory inventory.

Find Out More

Contact us today for information on our complete line of P.C. board relays. Potter & Brumfield, A Siemens Company, 200 S. Richland Creek Drive, Princeton, Indiana 47671-0001.

Call toll-free 1-800-255-2550 for the P&B authorized distributor, sales representative or regional sales office serving your area.


Potter & Brumfield

A Siemens Company

8905

Sprague[®]

CHOOSE YOUR CERAMIC.

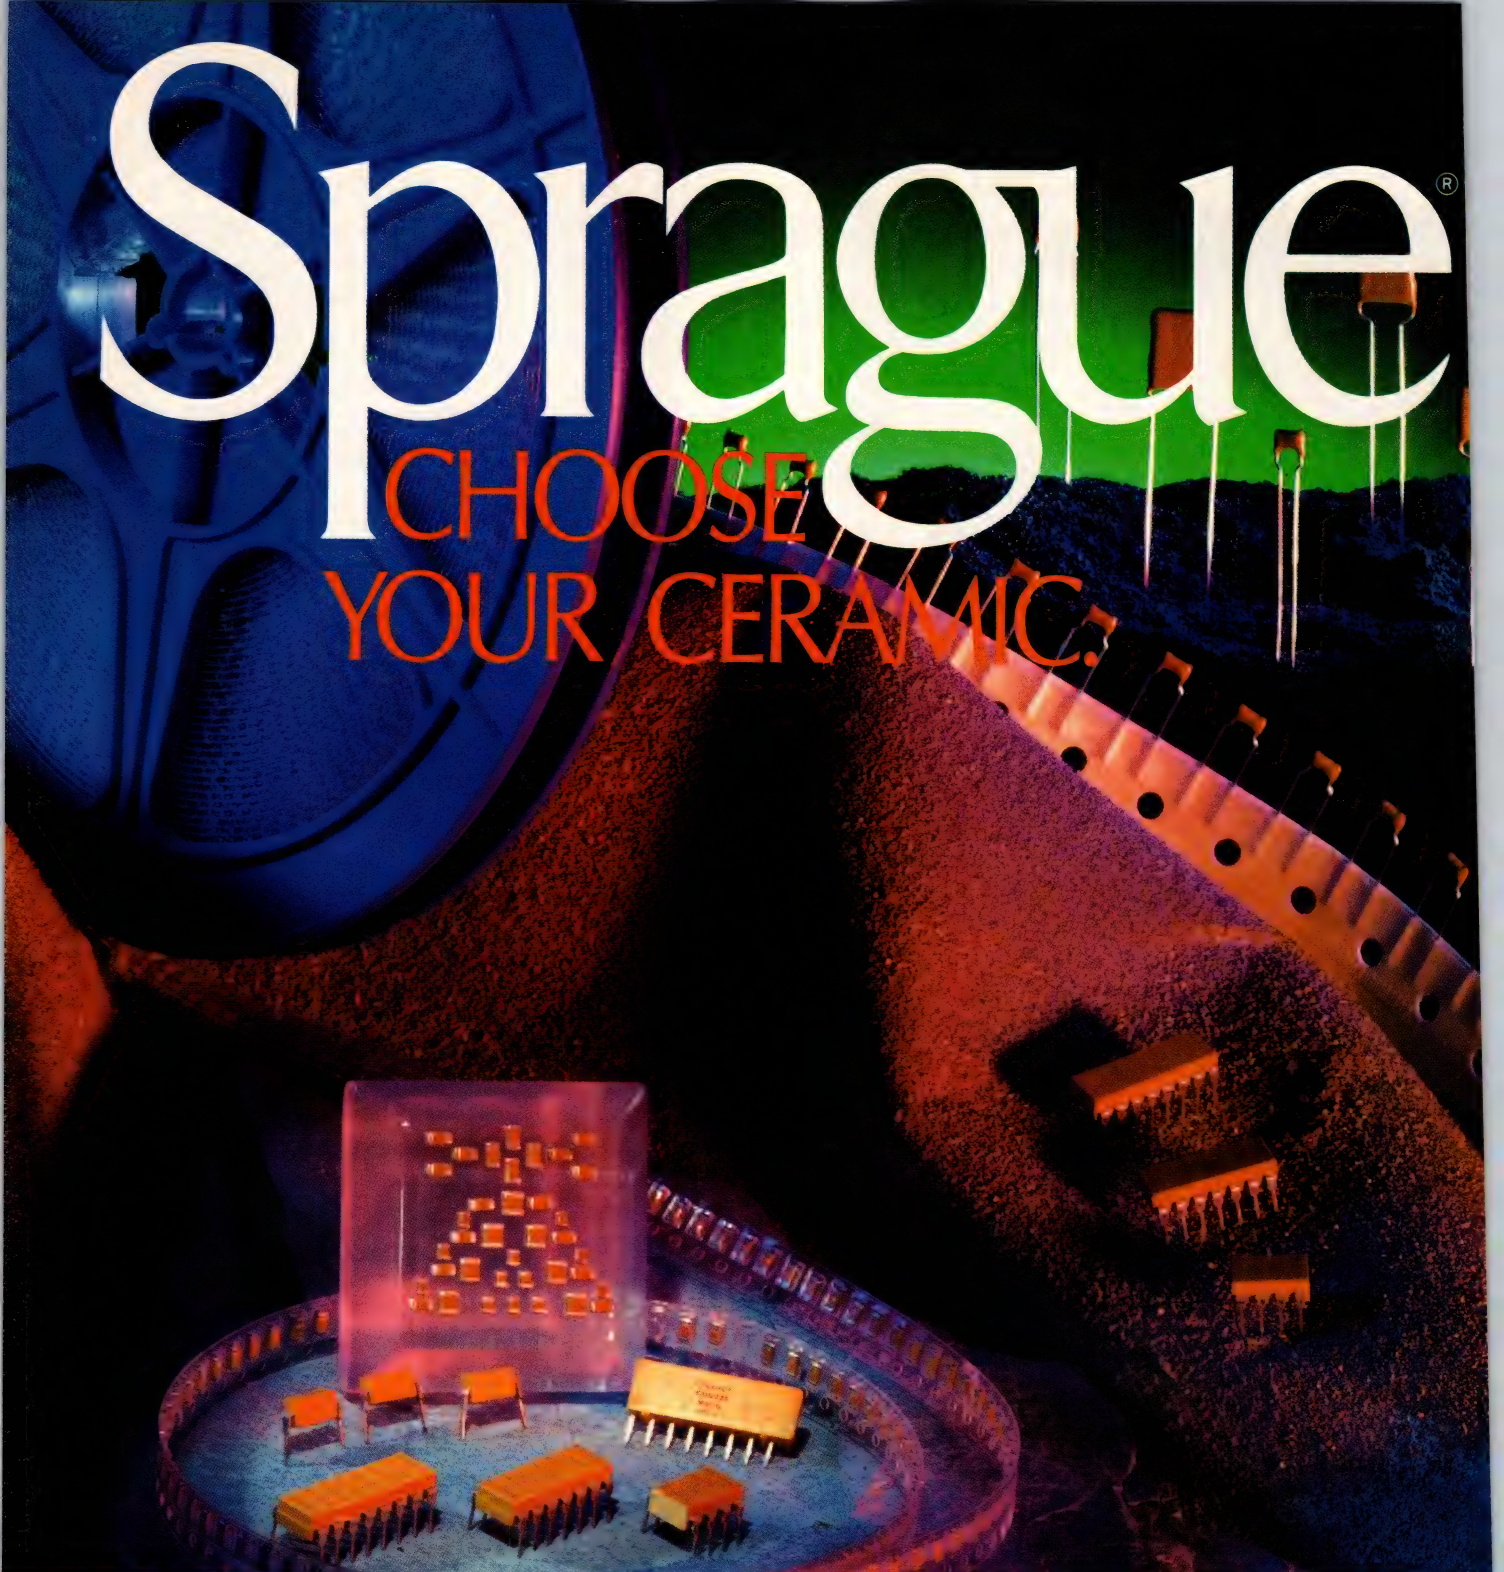

Sprague MONOLYTHIC[®] Caps . . . high reliability, low-cost.

MONOLYTHIC[®] Multilayer Ceramic Capacitors from Sprague: a complete line of ceramic caps featuring economy, high-performance and reliability in a variety of popular ratings and EIA temperature characteristics. Get fast delivery on multilayer ceramic chip caps for general purpose,

high-voltage, high-temperature and high-frequency applications. Sprague ceramic chips are supplied on tape and reel to EIA 481A. Also available: molded-case DIPs and SIPs supplied in plastic carriers. Conformally-coated radial-lead capacitors are also available in quantity, supplied in bulk pack

or on tape and reel. For technical data, write for the new Sprague Catalog WF-100A to Technical Literature Service, Sprague Electric Company, P.O. Box 9102, Mansfield, MA 02048-9102.




NOW PUT A LITTLE AVANTEK MAGIC IN YOUR SYSTEM

**Avantek MagIC™
High Speed ICs
Enable Superior
System Designs**

magIC™

The new MagIC™ series of silicon bipolar MSI integrated circuits offer the best performance available from silicon ICs yet. The broadband, high frequency performance of these high-speed silicon ICs make them cost-effective alternatives to more expensive GaAs ICs. Avantek MagIC silicon ICs are manufactured with Avantek's proprietary 10-15 GHz F_t , 25 GHz F_{max} Isosat™ process for unsurpassed integration and performance at microwave frequencies. Avantek's MagIC series ICs presently consists of four product families: low noise amplifiers, active mixers, variable gain control amplifiers, and prescalers. These low-cost, high-speed silicon ICs are Avantek's magic solutions to your RF, microwave and light-wave system performance and cost problems.



High Performance, High Speed, Low Cost...

The INA-series of two-stage low-noise amplifiers presently consists of three models, offering:

- 3 dB bandwidths to 2.8 GHz



- Gains as high as 32 dB
- Noise figures as low as 1.7 dB
- Prices as low as \$22.00 each* in hermetic 70 mil surface mount package

The IAM-series of active mixer/amplifiers presently consists of two models, offering:

- RF and LO frequency range of .05 to 5.0 GHz
- Conversion gain as high as 15 dB
- LO power as low as -10 dBm
- Prices as low as \$16.00 each* in hermetic 180 mil surface mount package

The IVA-series of variable gain control amplifiers presently consists of two models, offering:


- 3 dB bandwidths to 3.0 GHz
- 30 dB gain control range

- Gains as high as 26 dB
- Prices as low as \$28.50 each* in hermetic 180 mil surface mount package

The IFD-series low phase noise static prescalers offer:

- Divide-by-4 to 5 GHz
- Low 125 mW Power Consumption
- Prices as low as \$18.50 each* in hermetic 100 mil surface mount package

*Price for 1000 piece quantities

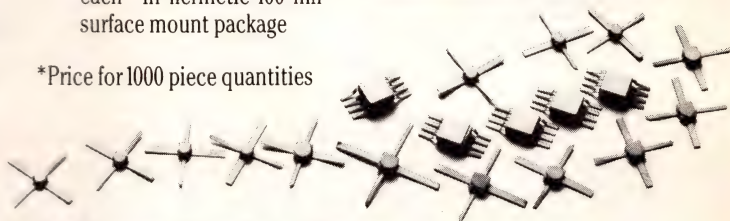

MagIC™ ICs Are Available in Quantity for Volume Applications

Avantek presently produces more than 1,000,000 MMICs per month. So you can be assured the MagIC high speed ICs you need will be available to support your volume production programs. And, all MagIC silicon ICs are in stock at your local Avantek distributor.

For additional information, or the name and address of your local distributor, contact the regional sales office nearest you.

Regional Sales Offices

North America

Eastern: (301) 381-2600

Central: (312) 358-8963

Western: (805) 373-3870

European: (44) 276-685753




Magic Solutions in Silicon




Up to 0.3 μ F

MICRO/Q 2000 capacitors have available capacitance levels from 0.01 μ F to 0.3 μ F. Reduce board level noise up to a factor of 10. And MICRO/Q 2000's molded construction seals out moisture and humidity.

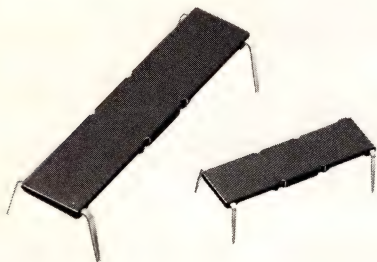

Improve existing board performance

MICRO/Q 1000 capacitors can be retrofitted to solve noise problems on existing boards. Because MICRO/Q 1000 caps share mounting holes with existing IC pins, no board redesign is required. Effective decoupling becomes a matter of adding one insertion step.



Simplify board layout and get a choice


MICRO/Q 1000 ceramic decoupling capacitors share board mounting holes with IC pins. You don't have to waste space on additional holes, as you do for standard caps. Simplifying board design opens up two very attractive options. Add more active devices with increased packaging density in the same space, or design the same package on a smaller board.

Either way, you win with MICRO/Q 1000.



Design noise out of PGA and LCC packages

MICRO/Q 3000 capacitors provide effective solutions to noise problems with VLSI PGA packages and LCC sockets. Design effective decoupling on complex multi-layer board layouts by fitting MICRO/Q 3000 capacitors under PGA or LCC sockets. They occupy no additional board space and provide the low-inductance, high-frequency decoupling required by today's VLSI packages. Available in a range of pinout configurations.

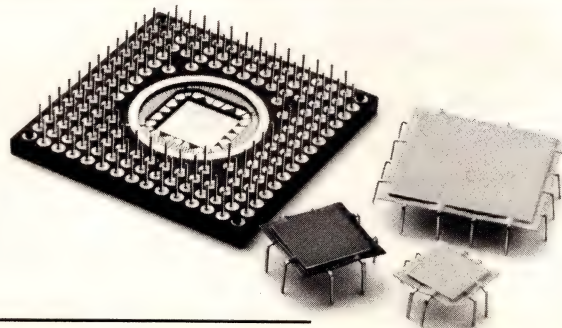

noise problems...
space problems...
EMI/RFI problems...

TOP THIS.

Rogers MICRO/Q® decoupling capacitors reduce voltage noise spikes in ICs, often by as much as a factor of ten. And since they're easily mounted *underneath* the IC, MICRO/Q capacitors conserve valuable board real estate, too. A range of configurations makes MICRO/Q flat capacitors especially effective at reducing noise on:

- | | |
|--|--------------------------------|
| ■ 256 K RAMs | ■ Boards that need EMI/RFI fix |
| ■ Video RAMs | ■ CAD/CAM/CAE |
| ■ EPROMs | ■ Telecommunications |
| ■ Static RAMs | ■ Minicomputers |
| ■ Microprocessors | ■ Printers and copiers |
| ■ Bus drivers/buffers | ■ Single-board computers |
| ■ Other ICs where noise spikes create performance problems | |


Find out how MICRO/Q capacitors reduce noise and provide better board density. Get the full story and a free sample. Call a Rogers MICRO/Q Product Specialist today, at (602) 967-0624. Fax (602) 967-9385.



ROGERS

Rogers Corporation
Circuit Components Division
2400 South Roosevelt Street
Tempe, AZ 85282

DISTRIBUTION: Europe: Mektron NV, Ghent, Belgium
Japan: Rogers Inoue Corporation, Nagoya
Taiwan, Singapore, Hong Kong: Dynamar
Korea: Far East Trading, Seoul Brazil: Rogers Coselbra, Sao Paulo.

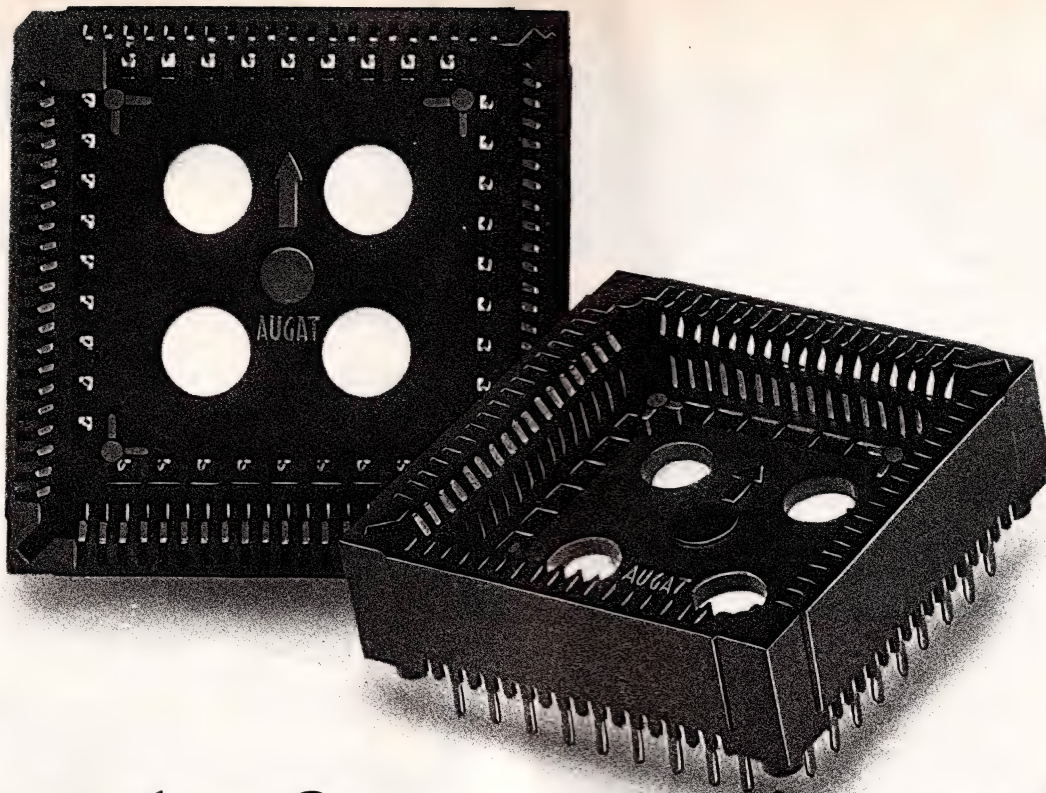

Now the first name in sockets has the last word in PLCCs.


Introducing the PCS Series from Augat, world leader in IC sockets. The design, performance and positions you prefer. With the quality, delivery and pricing you expect - only from Augat.

Interchangeable with your current supplier's product, the Augat PCS Series is available in 68 and 84 positions.

Accepts Jeduc Type "A" PLCCs on .050" (1.27mm) centers.

Solder-tail design to allow through-hole board patterns on .100" (2.54mm) grid.

Offers a high normal force of 200 grams per contact.

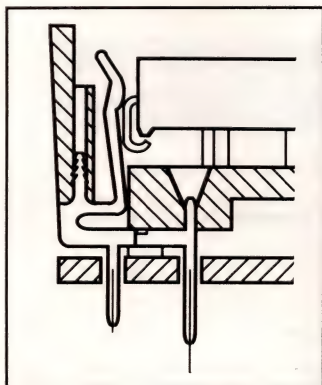

Every feature you requested from Augat.

Contact positively retains package.

And large drain holes aid cleaning.

The new PCS Series from Augat. Your single source supplier for a world of quality IC products.

Send for information and samples. Call direct. Or circle the reader service number.

We'd like to be first to receive the new PLCC data sheet, test report and product sample for ☐ 68 (or) ☐ 84 position (please specify).

Name

Title

Company

Address

City

State Zip

Mail to: Augat, Inc.
Interconnection Products Group
33 Perry Ave.
Attleboro, MA 02703
(508) 699-9800
Fax: 508-699-6717

EDN072089

Logic. Pure and Simple.

The MODEL 860 programmer. The logical choice for logic device programming.

A complete range of logic device support at an affordable price. Stand-alone operation. Setting user-friendly trends. Portable and lightweight. On-line customer support.

- Programs:
 - PAL, GAL, IFL, E/EEPLD, PEEL and ZPAL devices
 - 20, 24, 28 and 40 pin DIP devices without adapter
- 64K byte standard RAM (256K optional)
- Blows device security fuse
- JEDEC and HEX formats
- Test vector and preload capabilities
- RS-232C serial port
- Options:
 - PLCC adapter
 - LOGILINK™ software for remote operation

Call DIGELEC for our full range of programmers.

Logic. The DIGELEC Way.

digelec PROM & LOGIC
PROGRAMMERS

CIRCLE NO 133

\$2795*



*U.S. domestic price.

USA HQ: 22736 Vanowen St., West Hills, CA 91307. Tel: (818) 887-3755.

Outside California Tel: (800) 367-8750

Europe HQ: Gaissacherstrasse 18, D-8000 Munich 70. Tel: (089) 776 098

Faster fasteners for access panels.



Dual Lock™ brand Reclosable Fasteners



Scotchmate™ brand Hook and Loop Reclosable Fasteners

With 3M's reclosable fasteners, access panels and doors simply pull open and push shut. These fasteners have a strong, pressure sensitive adhesive backing for immediate attachment and long-term performance. They replace cumbersome and unsightly conventional fasteners, eliminating the need to drill holes and refinish surfaces. So production is faster, manufacturing costs less and access is easier.

©1989 3M. "Scotchmate" and "Dual Lock" are registered trademarks of 3M.

FREE SAMPLES. For more information and free samples of 3M fasteners, mail to 3M Industrial Specialties Division, 3M Center Bldg. 220-7E-01, St. Paul, MN 55144-1000.

Name _____

Company _____ Phone _____

Address _____

City _____ State _____ Zip _____

☐ Please have a sales representative call me.

EDN 07/20/89

3M



Get surface mount news that probes beneath the surface!

Read all about it!

The sensational new Mepco/Centralab Surface Mount Device Catalog tells you everything you need to know to select and specify America's broadest line of SMD® passive components:

- Tantalum capacitors
- Monolithic ceramic chip capacitors
- Aluminum electrolytic capacitors
- Trimmer capacitors
- Thick-film and precision metal-film resistors
- High-performance trimmers
- Miniature SMD® selector switches

Take your choice of high-reliability MIL-grade, industrial-grade or quality commercial-grade devices in a wide selection of ratings and constructions.

Every product section contains complete mechanical, electrical and performance data. You'll even find helpful design tips that can make short work of your next project.

There's also a variety of packaging options to match your production requirements, including bulk or blister-pack trays for manual placement, and magazine or tape-and-reel for your high-speed automatic machines. Plus, solder mounting recommendations are clearly spelled out.

To give your circuits greater density, start with the maximum volumetric efficiency of surface mount devices from Mepco/Centralab — the active leader in passive components.

Mail to: Mepco/Centralab
Attn: Corp. Advertising
2001 W. Blue Heron Blvd.
P.O. Box 10330
Riviera Beach, FL 33404

- Please send me the following:
- ☐ Surface Mount Device Catalog
 - ☐ Leaded Resistor/Capacitor Data Book
 - ☐ Please have a sales representative call

Name/Title _____
Firm/Dept./Div. _____
Address/MS _____
City/State/Zip _____
Phone() _____



EDN 07/20/89

MEPCO/CENTRALAB
A DIVISION OF NORTH AMERICAN PHILIPS CORPORATION



CIRCLE NO 134

SMD® is a service mark of North American Philips Corporation.
THE WALL STREET JOURNAL® is a registered trademark of Dow Jones & Company, Inc.
USA TODAY® is a registered trademark of Gannett Co., Inc.

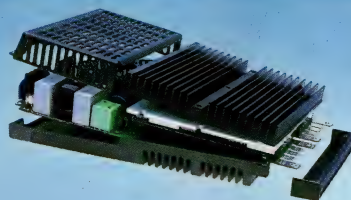

Celebrating The FlatPAC...

**...From
VICOR EXPRESS...
Off-The-Shelf
Component-Level
Power Solutions.**

- **Ordering made easy.**
Call us now...toll free
or order by FAX (508)475-6715.
- **Express shipping.**
All **domestic** orders are sent UPS
surface...*free!* Overnight shipping is
available at additional low rates.
- **Special Offers.**
Watch for special product promotions.
- **Convenient ways to pay.**
You can choose among:
— Visa, MasterCard
— Open account with established credit
— COD
— Bank check or money order
- **Warranty.**
2-Year limited Warranty.
- **Need Vicor's expertise?**
Our applications engineering staff is
standing by to discuss immediate solutions
to your power system needs.


- 115/230 VAC strappable
- 7 Watts/cubic inch
- 80-90% efficiency
- "Class A" EMI/RFI
- Conforms to UL, CSA, and TUV
- Over 10,000 **standard** models
- Semi-custom configurations via modular
construction from VI-200's.

Output Ranges


Single
to Triple

2 to 95
Volts


50 to 600
Watts

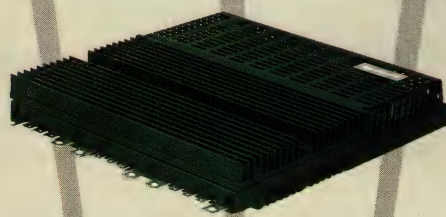

1.37" x 8.6" x 7.4"

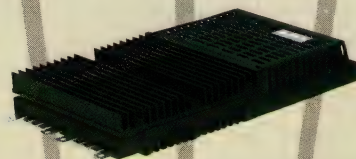

1.37" x 8.6" x 4.9"



1.37" x 8.6" x 2.5"

Special Limited Time Offer!

Single Output	Dual Output	Triple Output
● VI-LF0-CV 5V @ 150W \$167 ● VI-MF0-CS 5V @ 300W \$293 ● VI-NF0-CP 5V @ 450W \$420 ● VI-LF1-CU 12V @ 200W \$185 ● VI-NF1-CP 12V @ 450W \$420 ● VI-NF3-CP 24V @ 450W \$420	● VI-PF01-CVU 5V @ 150W \$347 12V @ 200W ● VI-QF01-CSU 5V @ 300W \$473 12V @ 200W	● VI-RF011-CVVV 5V @ 150W \$491 +12V @ 150W -12V @ 150W ● VI-RF022-CVVV 5V @ 150W \$491 +15V @ 150W -15V @ 150W ● VI-RF013-CVVV 5V @ 150W \$491 12V @ 150W 24V @ 150W

**IMMEDIATE
DELIVERY**


The models listed above will be available at a 30% discount through
August 31, 1989.

Call 1-800-735-6200



VICOR Corporation 23 Frontage Road, Andover, MA 01810

LITERATURE: POWER SOURCES

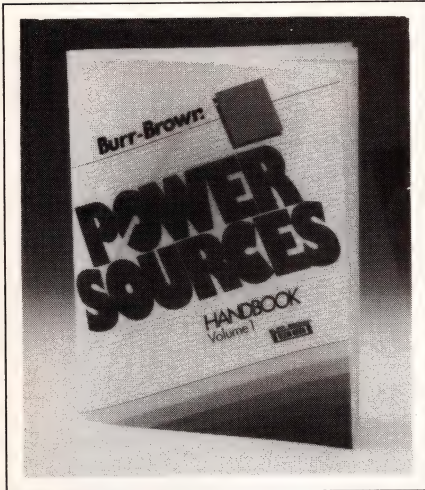


Power sources covered

Power Sources Handbook presents more than 450 single-, dual-, and triple-output power supplies in a wide range of modular packages and DIPs. The 96-pg guide provides product data sheets for the vendor's power-conversion products. Supplementary data includes a selection guide, a discussion of advanced reliability programs, a glossary of power-conversion terms, and application notes.

Burr-Brown, Box 11400, Tucson, AZ 85734.

Circle No 724

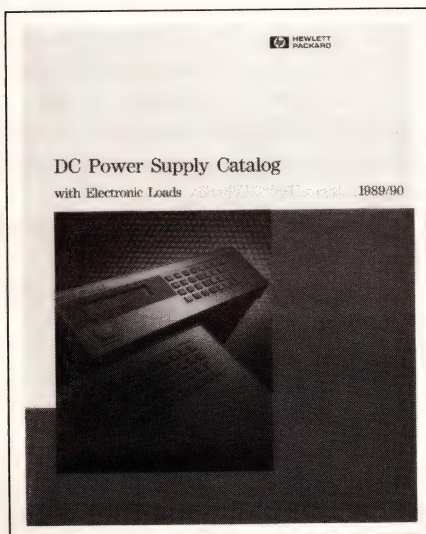

Booklet presents power-supply line

The vendor's 144-pg catalog provides information about its com-

plete 10W to 11-kW power-supply line, including analog-programmable, laboratory-bench, HP-IB-system, and special-purpose power supplies. Each section starts with an introduction and selection guide to that particular power-supply line. The booklet also talks about the vendor's single- and multiple-

input dc electronic loads for power-supply testing. It contains photographs, drawings, a glossary, specifications, and ordering and application information.

Hewlett-Packard Co, 19310 Pruneridge Ave, Cupertino, CA 95014.

Circle No 725



Custom Linear Power in less than 10 days and it's UL recognized.

You give us the specs... and we deliver the power you want... fast!

Whether you only need a few watts or hundreds of watts... our linear power supplies deliver the performance to get your system up and running fast and the reliability to keep it there.

Thirty-three standard mechanical configurations and 20,000 pre-assembled regulator combinations mean low prices and delivery in as little as 10 working days.


And because all our power supplies are built with pre-UL recognition, you don't have to worry about our power supplies holding up your system UL approval.

Get the full story on worry free linear power from Xentek. Call or write today for our free information package.

Xentek

The Heart of Your System

760 Shadowridge Drive • Vista, CA 92083 • (619) 727-0940 • TWX: 910-322-1155 • FAX: (619) 727-8926
XENTEK — the first word in Custom Linear, Standard Linear, Custom and Standard Switchers, Extreme Isolation Transformers, Line Conditioners and Custom Military Power Conversion Equipment.

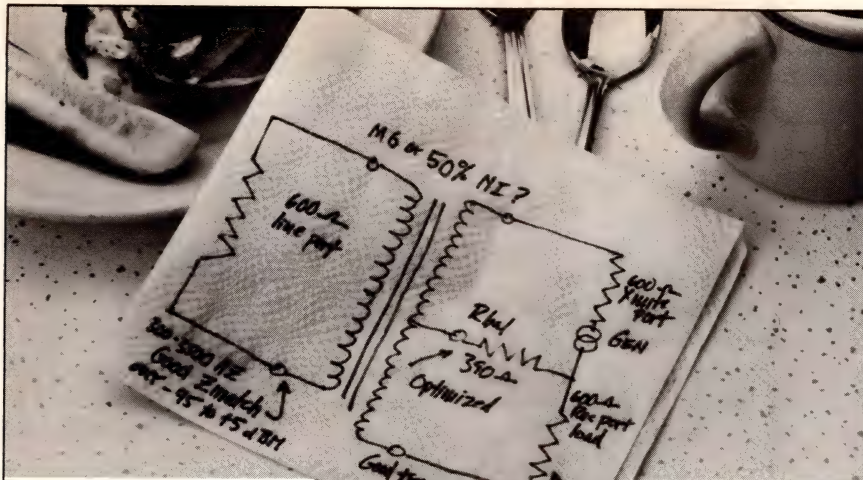

LUNCH CIRCUIT.

We know there's no special time for ideas. We also know that if your design involves transformers and/or inductors, we can help you make sure it's right. *Before* it gets to breadboard.

Meanwhile, you may want to read our free *Transformer Application Guide*. It's loaded with food for thought. Like how to determine VA rating. How to size rectifier circuits. How to estimate secondary RMS voltage. How to determine capacitor factors. And much more.

Simply write us at East Bridgewater, MA 02333. Or call 1-800-422-1107. In Massachusetts, call (508) 378-5260.


Bon Appetit!

Foxboro/Power Components Group




FOXBORO

CIRCLE NO 137

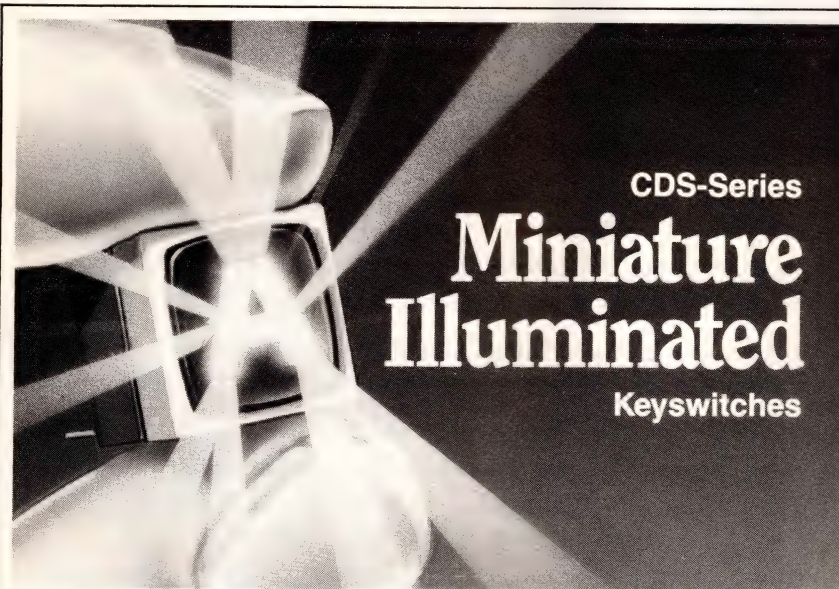

- **Low Profile** of .580" seated height saves space behind the panel and on the PC board.
- **Exceptionally Bright** LED backlighted nomenclature is readable from almost any angle. Optional incandescent lamp is also available.
- **Long Life** sealed construction eliminates dust and moisture contamination, ensuring trouble-free switch operation.
- **Available** off the shelf from CRL Components or authorized Distributors at competitive prices.




ACTUAL SIZE

CRL Components, Inc.
Highway 20 West
Fort Dodge, Iowa 50501
Telephone: (515) 573-1300
FAX: (515) 573-1342
A Cambridge Electronic Industries Company

CRL

CIRCLE NO 138

LITERATURE

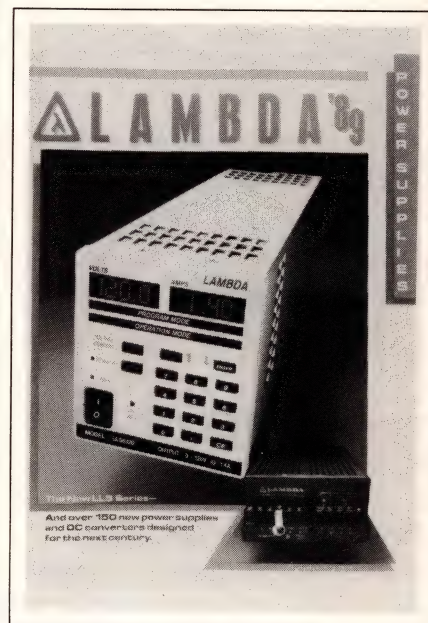

Comprehensive listing of power supplies

This 1989 catalog covers more than 150 power supplies and dc converters that come in commercial, industrial, and military versions. The 200-pg publication describes the vendor's LLS Series power supplies for test equipment; LMS Series remotely programmable power supplies; and MLW Series isolated dc/dc converters for military or civil aerospace applications. Other sections of the 9-part catalog deal with laboratory and test equipment, custom power systems, and accessories. A product selector guide, a section of mechanical drawings, and warranty and ordering information complete the catalog.

Lambda Electronics, 515 Broad Hollow Rd, Melville, NY 11747.

Circle No 726

Switching power supplies and services detailed

This 4-color leaflet provides data for 28 power-supply models, including electrical and mechanical specifications, special features, output currents, MTBF, I/O voltages, options, and agency approvals. The 12-pg brochure briefly describes the company's customer-support services

NEW MICROLITHIUM™ BATTERY SERIES JOINS THE DURACELL® XL™ POWER FAMILY!

Today Duracell is your best source for all your lithium battery needs.

First with high-power consumer-replaceable lithium batteries, Duracell now introduces the MicroLithium Battery Series for long-life, low-drain applications. These new lithium/manganese dioxide cells have the same quality and dependability as our popular High Power Series, but have been optimized for micropower equipment. UL recognized, they're available in a wide-range of coin and cylindrical sizes, with or without pin terminations.



DL123A — First 3-volt, high-power consumer-replaceable lithium batteries.

Our sales engineers listen to your engineers.

World-wide, you can count on our field sales engineers for




Assorted cell sizes and PCB pin types. Shown are DL2450; DL2032 with chip-straddle pins; DL1/3N.

expert applications assistance, battery samples, and test information, when you need it. From form-fit evaluation to component sourcing, we can help match the optimum lithium cell to your requirements.

Custom assemblies... standard solutions.

Our national network of Authorized Value-Added Assemblers can supply you with special terminations and battery packs. And Duracell will coordinate the effort and assist in the design work too!

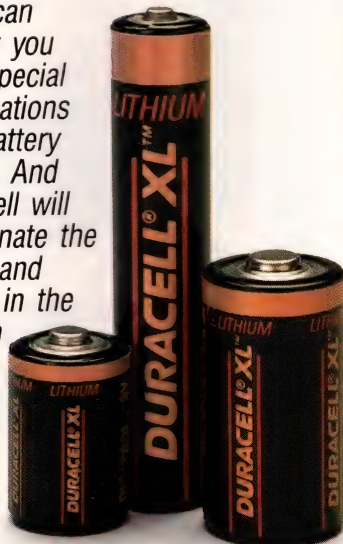

Popular-size cylindrical configurations: DL1/2AAL; DL2NSE; and DL2/3AL.

SPECIAL 10% INTRODUCTORY DISCOUNT!

We want you to try the new DURACELL XL MicroLithium Series of batteries. That's why we're offering a special discount on all orders placed and shipped before September 30, 1989.*



DL2/3AL with single pins (polarized pins available).



Velcro-mountable DL223AR computer clock battery.

Duracell... so very easy to work with.

The Duracell Team is just a phone call away to help you in fulfilling your battery requirements, from technical information to competitive pricing and quick deliveries. With Duracell, satisfying your lithium battery needs is easier than ever!

Call us today at one of the toll-free numbers listed below and lock in your 10% introductory discount.

*Discount applies to cells with and without PCB pins purchased directly from Duracell: DL2450; DL2430; DL2032; DL2025; DL2016; DLAAL; DL2/3AL; DL1/2AAL.

DURACELL INC.
OEM Sales and Marketing Group
Berkshire Industrial Park
Bethel, CT 06801

FOR INFORMATION AND TO GET YOUR 10% DISCOUNT CALL:

East	1-800-423-5962	(In Connecticut, 203-264-3935)
Central	1-800-525-8457	(In Illinois, 312-954-2714)
West	1-800-331-3923	(In California, 800-225-1962)

©1988, Duracell Inc.

IEEE 488

for PC/AT/386 & PS/2

Compare the features!

IOtech Personal488

National Instruments PCIIA

\$395	\$395	IEEE 488 board with Quick BASIC & BASICA driver for PCs and compatibles
✓	✓	BASIC ON SRQ GOSUB capability
✓	✓	IEEE printer/plotter redirection utilities
✓	✓	Compatible with Windows 286 & 386
✓	✓	Compatible with IBM GPIB board
✓	N/A	DMA beyond 64K segment boundaries
✓	N/A	BASIC ON ERROR GOSUB capability
✓	N/A	Instrument control directly from DOS
✓	N/A	Borland Quattro spreadsheet support
✓	N/A	DADISP waveform spreadsheet support
✓	+\$495	Lotus 1-2-3 spreadsheet support
✓	+\$495	Lotus Symphony spreadsheet support
✓	+\$100	On-board crystal oscillator
✓	+\$50	Turbo BASIC support
✓	+\$50	True BASIC support
✓	+\$50	Microsoft C support
✓	+\$50	Microsoft Quick C support
✓	+\$50	Aztec C support
✓	+\$50	TURBO C support
✓	+\$50	Microsoft FORTRAN 4.0 support
✓	+\$50	TURBO Pascal support
✓	+\$50	8086 assembler support

\$395 \$1,935 Total

Add \$100 to each for IBM Micro Channel PS/2 support.

If you already own a National Instruments PCII or PCIIA, IBM GPIB, or any NEC 7210-based IEEE board, Driver488 from IOtech provides the software features above for only \$195. Also, our GP488B IEEE board at \$295 is an economical replacement for any of the IEEE boards listed above.



Call or send for your
FREE Technical Guide

IOtech

(216) 439-4091

Telex 6502820864 • Fax (216) 439-4093

IOtech, Inc. • 25971 Cannon Road • Cleveland, Ohio 44146

London (0734) 861287 • Paris (1) 34810178 • Milan (02) 4120361 • Brussels (02) 3848062

Zurich (01) 8219444 • Vienna (0222) 253626 • Göttingen (01) 8303333

Linköping (0131) 10140 • Helsinki (01521) • Munich (089) 710020 • Oslo (02) 649070

Copenhagen (02) 804200 • Madrid (91) 4027080 • Lisbon (01) 4103420 • Seoul (02) 678 7457

Tel Aviv (03) 491 922 • Melbourne (03) 5795622 • Toronto (416) 6740444

Products listed are trademarks of the respective manufacturer.

Comparison based on product information available January 1, 1989.

CIRCLE NO 140

LITERATURE

and its capabilities for designing and manufacturing complete engineered assemblies.

Brown Applied Technology Inc.
3520 De La Cruz Blvd, Santa Clara,
CA 95054.

Circle No 727



Guide profiles five power-supply series

A comprehensive 62-pg guide features the company's five series of switching power supplies. The 4-color, spiral-bound booklet includes a selection guide for single- and multiple-output models and mentions the vendor's family of uninterruptible power supplies.

Shindengen America Inc., 2649
Townsgate Rd, Westlake Village,
CA 91361.

Circle No 728


Brochure lists switching power supplies

This 4-pg leaflet covers the VF Series switching power supplies and the DVF Series switch-mode power supplies. The brochure indicates specifications, options, dimensions, and prices.

Deltron Inc., Box 1369, North
Wales, PA 19454.

Circle No 729

Intelligent Data Acquisition

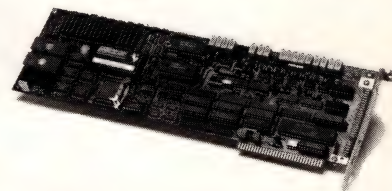

DAP 1200™

Data Acquisition Processor™ for IBM PC/XT/AT/386

Microstar's DAP™ manages the entire data acquisition and control interface inside a PC. Onboard intelligence in the DAP speeds development and increases performance.

- Onboard intelligence: 80186 coprocessor
- Acquires analog and digital inputs to 156,000 samples/seconds
- Buffers and processes input data
- More than 100 commands without programming
- Commands include: Average, Scale, Peak Detection, Logic, Integration, Differentiation, Thermocouple Linearization, Closed Loop Control (PID), Event Detection, Auto-Range, Waveform Generation
- FFT and FIR filtering without programming
- Custom commands may be written in C

DAP 2400™ also includes:

- 10 MHz or 16 MHz 80C186
- 20 MHz DSP56001 for 10 MIPS digital signal processing
- Acquires analog and digital inputs to 235,000 samples/seconds
- Updates analog or digital outputs to 250,000 values/seconds
- Performs 1,024 point complex FFT in under 10 milliseconds
- Executes FIR filters in less than 200 nanoseconds per tap

Call for FREE Demo Diskette

MICROSTAR

LABORATORIES™

(206) 881-4286

2863 152 Ave. N.E.

Redmond, WA 98052

Fax (206) 881-5494

CIRCLE NO 141

EDN July 20, 1989

SIEMENS

SAMSAN™ Displays. Our Technological Superiority Has Certain Visible Advantages.

Working with Small AlphaNumeric (SAN) displays used to impose certain compromises.

You had to put up with the high power consumption and heat dissipation of bipolar technology, which required expensive heat sinks and PCB designs. And you paid dearly for the high cost of ceramic packaging and the lack of price competition.

Now the company that brought you the first CMOS SANs expands the family of Siemens Advanced Model SAN (SAMSAN) displays in a plastic

SAMSAN Features

- .15" and .20" character heights in red, HER, green, and yellow.
- Commercial plastic package: -40°C to +85°C.
- Drop-in replacement for many existing ceramic applications.
- CMOS driver offers 30% lower power consumption and 25 times less quiescent power than bipolar. Heat sink not required for most applications.
- Half the cost of competitive packages.
- Small package saves valuable real estate.
- End stackable.
- Also available in hi-rel/military hermetic ceramic package versions.


package. These pin-for-pin replacements for Hewlett-Packard SANs offer a wider range of operating temperatures than HP's commercial bipolar ceramic device. For as little as half the price.

And SAMSAN LED displays are built with CMOS technology. So their lower power consumption and heat dissipation make thermal management simple.

Siemens Components, Inc. Optoelectronics Division, 19000 Homestead Road, Cupertino, CA 95014. (408) 725-3423.

Siemens Super SAN Display Swap.

We're sure you'll agree that our SAMSANs are the perfect replacement for HP SANs. So sure that if you'll send us a ceramic HDSP 2000 type display, we'll send you two plastic SAMSANs to replace it. Mail your request on your letterhead to R. Walton Smith. Be sure to specify your color choice.



Distributors: Advent Electronics, Inc., Almo Electronics, Hall-Mark, Insight Electronics, Marshall, Summit, Western Microtechnology.

Siemens... Practical Solutions by Design.

Performance

of Ceramic.

Plastic Price.

Nobody packs a hybrid
as tight as AT&T.

Based on its fully integrated capabilities and new substrate technology, AT&T offers hybrid ICs with record-breaking density.

By controlling hybrid production from end-to-end—development right on through manufacturing—AT&T gives systems and circuit designers a high-density, high-performance hybrid alternative.


In thick film, we offer today's most advanced Ceramic Multilayer Boards. In thin film, our new POLYHIC package, developed by AT&T Bell Laboratories, accommodates far more circuitry than conventional hybrids, within the confines of standard-size packaging.

Inside the package, fine-line conductor geometries maximize routing and interconnection density, help reduce design complexity, and enhance quality and reliability.

AT&T reliability extends to service and delivery. We currently produce half-a-million devices a week, with capabilities to meet urgent production schedules. We'll provide on-site support from AT&T field application and Bell Laboratories engineers. And we'll deliver full operational samples within eight weeks. Whatever it takes to help ensure your success.

For more on how AT&T can meet your thin film and thick film multilayer hybrid needs, just call **1 800 372-2447**.


The
components
of success.



AT&T

The right choice.

LITERATURE: INTEGRATED CIRCUITS

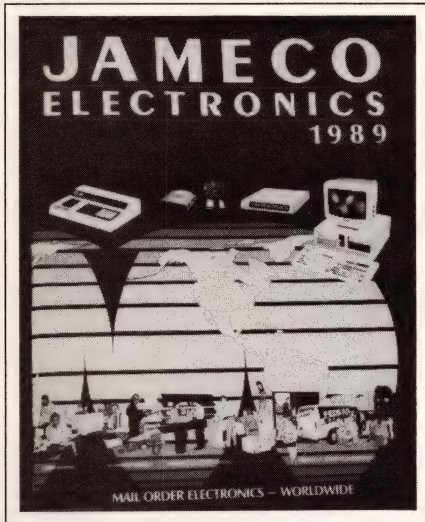

Broad range of computer kits, peripherals, and ICs

The vendor's 1989 catalog presents a wide variety of electronic products, from computer kits and IBM PC/XT-, PC/AT-, and Apple-compatible peripherals to ICs. It introduces several new products, including AMI 80386, 16- and 20-MHz mother boards and the New Enhanced AT (NEAT) mother board. The 76-pg, 4-color publication also features a 2-pg insert of useful TTL and μ P pin-out data.

Jameco Electronics, 1355 Shoreway Rd, Belmont, CA 94002.

Circle No 730

Data book features CMOS static RAMs

The company's 1989 Data Book describes its high-speed, high-performance military monolithic static RAMs. The publication also announces the company's intention to produce megabit-density monolithic SRAMs by 1990.

EDI, Literature Dept, 42 South St, Hopkinton, MA 01748.

Circle No 731


Listing of analog ICs

The vendor's product guide contains an assortment of proprietary and enhanced alternate-source analog devices. The 24-pg publication

offers standard products for hard-disk-drive, computer/peripheral, telecom, communications, military, industrial, and automotive applications, as well as detailed descriptions of ASIC development and tile-array specifications. The booklet provides selection guides for each product line, and its alternate-source cross reference lets design and component engineers specify direct replacement components.

Micro Linear Corp, 2092 Concourse Dr, San Jose, CA 95131.

Circle No 732

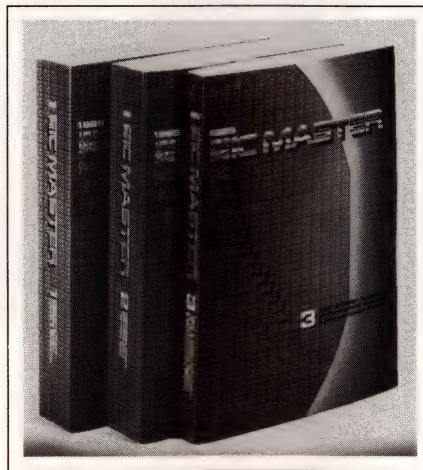


Three-volume set covers IC design specifications

The 1989 *IC Master* 3-volume soft-cover set includes 12,000 new ICs and over 150,000 alternate source devices. Volume 1 covers 80,000 standard ICs grouped by basic categories—digital, microprocessor, linear, interface, and memory. This volume includes an alternate source directory, a parts number index, a parts number guide, an application note directory, and an expanded military section. Volume 2 is a stand-alone reference providing technical data for more than 1200 manufacturers' data sheets. It also contains a directory of manufacturers and distributors. Volume 3 is a systems-level reference for custom and semicustom ICs, including gate array, cell-based ASICs, and programmable logic. A design-automat-


Carborundum® noninductive ceramic power resistors solve tough problems.

We make three types of noninductive ceramic resistors that can solve tough resistance problems, save money and space.

Energy Absorption

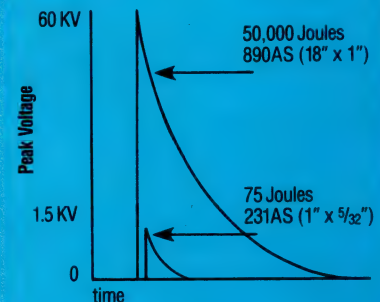

Power Absorption

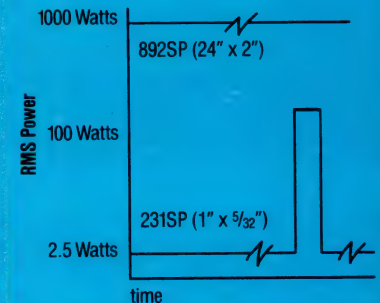

Regardless of the pulse shape, we have the resistor. Our Type SP handles large amounts of power from 60 cycles through VHF. Type AS can absorb huge amounts of energy in millisecond pulses. Type A solves high resistance problems in high voltage situations.


For more information on ceramic power resistors and our broad line of thermistors and varistors, call or write today.

The Carborundum Company
Electronic Ceramics Division
P.O. Box 664
Niagara Falls, New York 14302
Telephone 716 278-2521



CARBORUNDUM

The Carborundum Company
CIRCLE NO 144

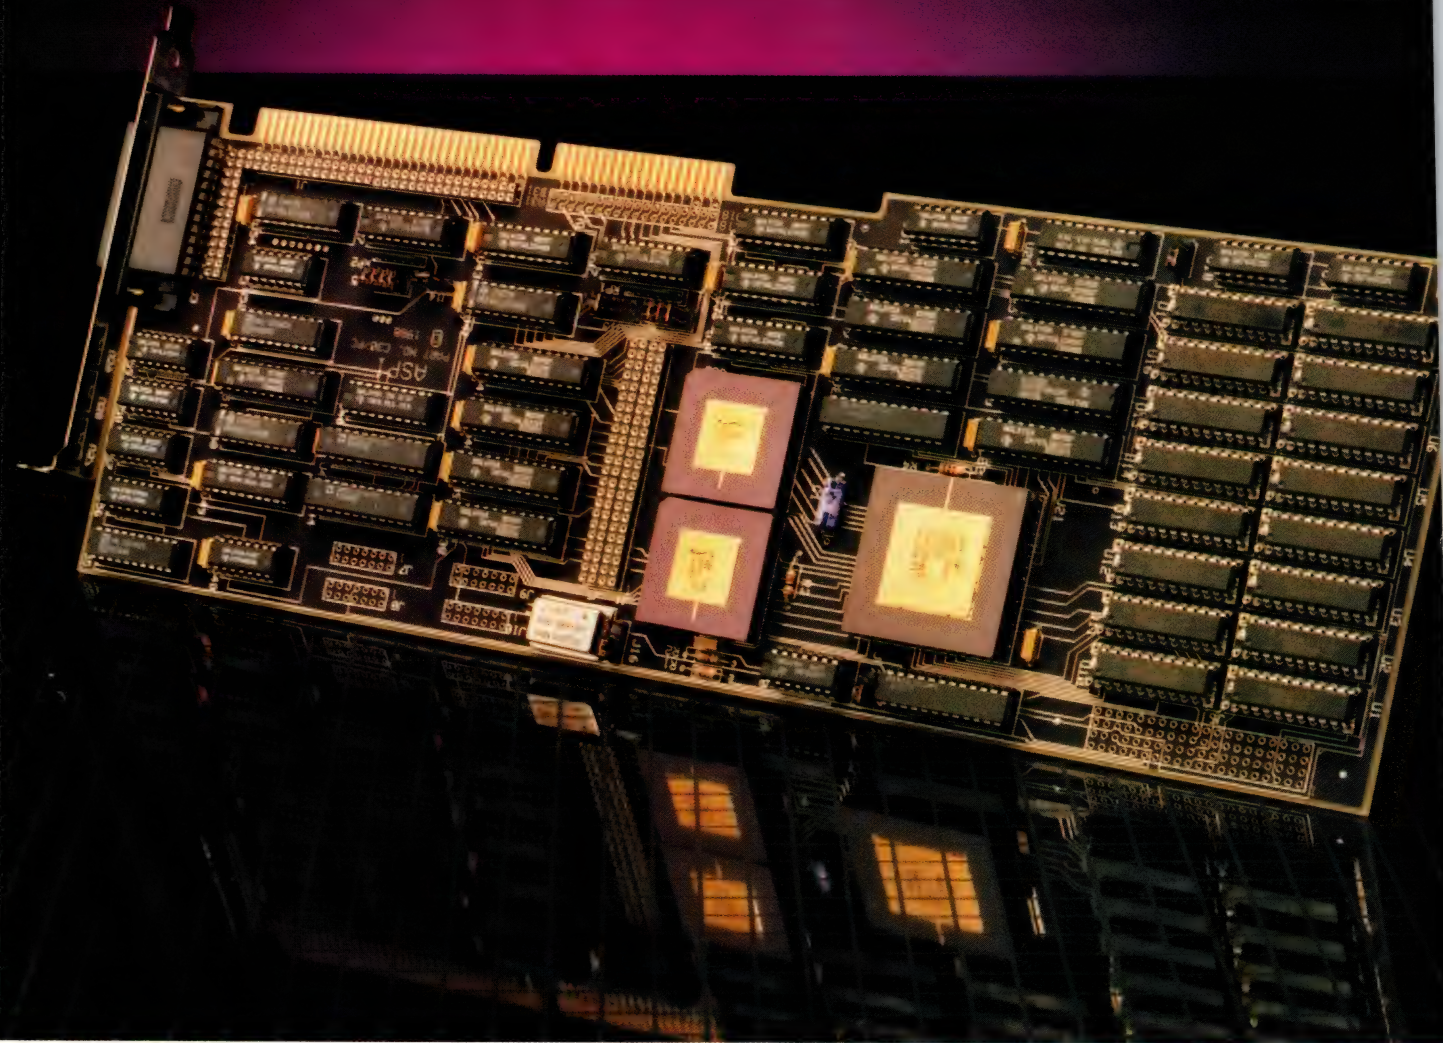

For Screaming C30 Speed from Your AT, Buy BansheeTM and Hang On!

The new Banshee System from Atlanta Signal Processors, Inc., can turn your AT or compatible into a full-blown C-language processing engine.

Banshee includes the first commercially available co-processor mother board based on TI's TMS320C30 microprocessor chip. The result is blinding 33 MFLOP speed that qualifies your AT for high-volume, high-speed calculations and C30 DSP system development.

The ASPI flexible memory approach further enhances AT performance. The mother board contains 64 to 512 Kbytes of *dual access* RAM and 8 Kbytes of *dual port* RAM. An optional bulk-memory daughter board

can add up to 16 Mbytes of DRAM to the system.

Other options include a wirewrap board for your custom hardware applications; a 16-bit, dual-channel, 200 kHz A/D-D/A daughter board;



a multiprocessor board and a host of other daughter boards under development.

Banshee also provides a sophisti-

cated, user-friendly software environment. The basic system includes SPOXTM (a C30 operating system), a program for loading and linking C30 code on the AT host, a full-featured C30 program debugger, and a proprietary shell program to make it all easy.

For detailed specifications and prices, contact Atlanta Signal Processors, Inc., 770 Spring St., Atlanta, GA 30308. Telephone 404/892-7265.

aspi

WORLD LEADERS IN DSP DESIGN TOOLS

SPOX is a trademark of Spectron, Inc.
AT is a trademark of International Business Machines, Inc.

LITERATURE

tion section provides extensive listings of CAE and CAD design tools. \$140.

Hearst Business Communications, 645 Stewart Ave, Garden City, NY 11530.

INQUIRE DIRECT

Designing circuits for batteries or remote sites

The 24-pg application note, *AN-23: Micropower Circuits for Signal Conditioning*, considers circuit design for conditions that require low power consumption, such as battery operation, remote locations, or thermal requirements. The note provides schematics and component values for signal-conditioning circuits that you use with strain gauges, thermocouples, strobed-power strain bridges, thermistor-based current loops, thermostats, A/D and V/F conversion, micro-power switching regulators, and battery backup regulators.

Linear Technology Corp, 1630 McCarthy Blvd, Milpitas, CA 95035.

Circle No 733

App note explains overvoltage protection

This 2-pg application note, *Overvoltage Protection for the ADG5XXA Series of Multiplexers*, analyzes the problems involved and the protection required in two typical multiplexer applications. It features the vendor's ADG5XXA Series multiplexers and describes protection circuitry that allows analog input signals to exceed the supply rails from -40 to +85°C. Topics covered include protecting typical multiplexer application circuits, and the advantages of external protection.

Analog Devices, Literature Center, 70 Shawmut Rd, Canton, MA 02021.

Circle No 734

Cathode Ray Tubes


Thomas Electronics cathode ray tubes ... designed for Military, Commercial and Industrial applications ... from the most sophisticated avionics and photo-recording to the general computer terminal and medical display applications.

Four production facilities to serve you best in Wayne, NJ — Los Angeles, CA — and Clyde, NY.

Send for our new full color catalog, or contact us with your specific requirements.

THOMAS ELECTRONICS

100 Riverview Drive, Wayne, NJ 07470 / 201-696-5200
TELEX: 310-685-3326 / FACSIMILE: 201-696-8298

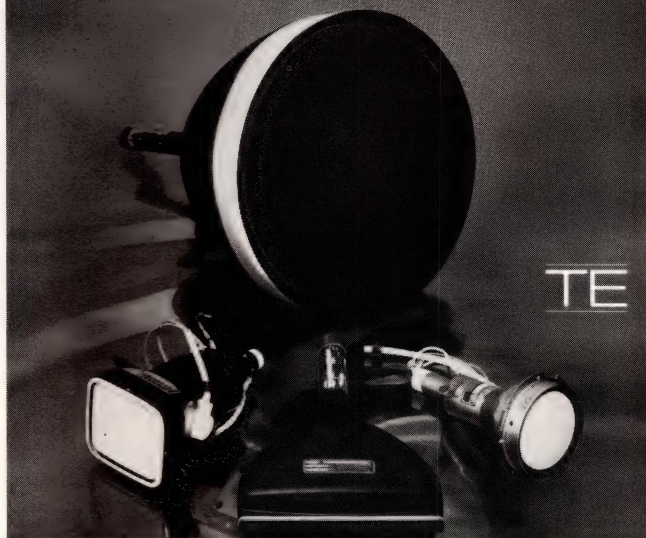

CIRCLE NO 146

or
a single output
to
2500
watts



See EEM pages D1785-1787

With output current to 500A, this UL/CSAWDE/IEC compliant product eliminates the need to parallel two or more power supplies in high current, reliability sensitive applications such as supermini computers and communications systems.

Reliability is enhanced through a thermally efficient design that exhibits only a 20°C temperature differential between the intake and exhaust air.

For reliable high-current single and multiple output power supplies from 500 to 2500 watts, manufactured under **Statistical Process Control (SPC)**, contact JETA.



POWER SYSTEMS, INC.
2675 Junipero Avenue ■ Signal Hill, CA 90806
(213) 427-0095 ■ FAX: 213-426-2417

CIRCLE NO 147



A 40¢ component can stop what nature throws at you.

Every so often, nature throws your system a surge. And whether it's lightning, static or a simple crossed line, it can destroy the most expensive system with a single blow.


About 40¢ is all it takes to protect your design from this cruel fate. Thanks to the full line of surge suppression devices from Harris.

Catch A Surge.

Whether you're designing consumer products or aerospace systems, high-rel military or industrial controls, Harris has a surge suppression solution for you. Because if one of our varistors isn't right for the job, one of our Surgector™ devices will be.

All the Right MOVs.

Harris offers the broadest line of MOVs in the industry. From 5V to 3500V. Up to 70,000 peak amps. And up to 10,000 joules.



They're widely used for incoming AC protection and clamping circuits. And they're available in a wide range of packaging—axial leaded, radial leaded, leadless surface mount, high-energy modules and connector-pin configurations.

Inventor of Surgector.


Surgector devices combine a thyristor and a zener into one reliable

cost-effective device. At low voltages the Surgector device is off. But the instant its clamping voltage is exceeded, the Surgector turns on. Within nanoseconds, the surge is shunted safely to ground, protecting your circuit from sure destruction.

Because Surgector devices respond so quickly and can shunt lots of energy away from the circuit, they're

perfect for protecting expensive components from all kinds of transients. Lightning strikes, load changes, switching transients, commutation spikes, line

crosses—all the things nature throws your system's way.



We'll Help You Choose.

Which technology is right for you? Just give us a call at 1-800-4-HARRIS, Ext. 1452 (in Canada, 1-800-344-2444, Ext. 1452). Or call your local Harris sales office or distributor.

What your vision of the future demands. Today.



CIRCLE NO 148

Unveiling Holmberg's Fast TrakSM Service.



**Over 10,000 possible
configurations of D-sub
connectors delivered
in 72 hours!**

That's what you can expect from Fast TrakSM — Holmberg's newest value-added service.

Our value-added distributors stock complete inventories (insulators, metal shells, grounding straps and snap latches), assemble the parts to exact customer specifications and ship promptly.

Fast Trak will beat your present lead times. Eliminate costly inventories and carrying charges. Get you back in the race for Just-In-Time deliveries. For the Holmberg value-added distributor nearest you, refer to our complete list on the opposite page. One phone call will put your production on the right track in record-breaking time!

FAST TRAKSM

A SERVICE OF

**H→E[®] HOLMBERG
ELECTRONICS**

PO Box 37 • Asheville Highway
Inman SC 29349 USA • (803) 472-4141
FAX: 803-472-3985 (Customer Service)
FAX: 803-472-8568 (Marketing/Engineering)

FAST TRAKSM

Request a certified Holmberg product from any of these value-added distributors.

ALABAMA

Hammond Electronics • Huntsville AL 35816
(205) 830-4764 • FAX: 205-830-4287

ARIZONA

Bell Industries • Tempe AZ 85281
(602) 966-7800 • FAX: 602-967-6584

CALIFORNIA

Bell Industries • Sunnyvale CA 94089
(408) 745-0400 • FAX: 408-745-1461
Cypress Electronics • San Diego CA 92121
(619) 535-0011 • FAX: 619-535-0018
Cypress Electronics • Santa Clara CA 95050
(408) 980-2500 • FAX: 408-986-9584
Cypress/RPS Electronics • Buena Park CA 90620
(714) 521-5230 • FAX: 714-521-5716
El-Com/Cabletek • Santa Ana CA 92704
(714) 432-6635 • FAX: 714-556-0468
Electronic Supply • Riverside CA 92501
(714) 787-9220 • FAX: 714-781-0453
Electronic Supply • San Diego CA 92126
(619) 693-8222 • FAX: 619-530-1957
PSC • Sunnyvale CA 94086
(408) 737-1333 • FAX: 408-737-0502

COLORADO

Cypress Electronics • Englewood CO 80111
(303) 792-5829 • FAX: 303-792-5832

CONNECTICUT

Schaal Associates • Yalesville CT 06492
(203) 269-3779 • FAX: 203-284-2159

FLORIDA

Bell Industries • Alta Monte Springs FL 32701
(407) 339-0078 • FAX: 407-339-0139
Deanco • Winter Park FL 32792
(407) 671-5100 • FAX: 407-679-0361
Hammond Electronics • Ft. Lauderdale FL 33309
(305) 973-7103 • FAX: 305-973-7601
Hammond Electronics • Orlando FL 32805
(407) 841-1010 • FAX: 407-648-8584

GEORGIA

Bell Industries • Norcross GA 30071
(404) 662-0923 • FAX: 404-449-6901
Hammond Electronics • Norcross GA 30093
(404) 449-1996 • FAX: 404-242-9834

ILLINOIS

Bell Industries • Elk Grove Village IL 60007
(312) 640-1910 • FAX: 312-640-0474

INDIANA

Bell Industries • Indianapolis IN 46268
(317) 875-8200 • FAX: 317-875-8219

MARYLAND

Deanco • Gaithersburg MD 20879
(301) 948-6444 • FAX: 301-963-6469
Resco/Baltimore • Baltimore MD 21236
(301) 529-0500 • FAX: 301-529-2412
Resco/Washington • Beltsville MD 20705
(301) 937-9100 • FAX: 301-937-6982

MASSACHUSETTS

Bell Industries • Andover MA 01810
(508) 474-8880 • FAX: 508-474-8902
Schaal Associates • Burlington MA 01803
(617) 272-7940 • FAX: 617-272-3343

MICHIGAN

Bell Industries • Ann Arbor MI 48104
(313) 971-9093 • FAX: 313-971-9178

MINNESOTA

Bergquist Company • Minneapolis MN 55435
(612) 835-2322 • FAX: 612-835-4156

NEW JERSEY

Deanco • Fairfield NJ 07006
(201) 575-7960 • FAX: 201-575-3606

NEW YORK

Deanco • Ithaca NY 14850
(607) 257-4444 • FAX: 607-257-5779
QAR Electronics • Mt. Vernon NY 10550
(914) 699-2224 • FAX: 914-699-6202
Schaal Associates • Hauppauge NY 11788
(516) 434-7100 • FAX: 516-434-7117

NORTH CAROLINA

Century Electronics • Raleigh NC 27612
(919) 782-2116 • FAX: 919-881-9216
Hammond Electronics • Greensboro NC 27420
(919) 275-6391 • FAX: 919-275-6391 (X225)

OHIO

Bell Industries • Dayton OH 45459
(513) 435-8660 • FAX: 513-435-6765

OREGON

Cypress Electronics • Beaverton OR 97006
(503) 641-2233 • FAX: 503-643-1237
Murphy Electronics • Beaverton OR 97006
(503) 642-2001 • FAX: 503-591-8624

PENNSYLVANIA

Century Electronics • Norristown PA 19043
(215) 631-5400 • FAX: 215-631-5406

SOUTH CAROLINA

Hammond Electronics • Greenville SC 29607
(803) 232-0872 • FAX: 803-232-0320

TEXAS

Bell Industries • Richardson TX 75081
(214) 690-0466 • FAX: 214-690-0822
Connec/Tek Inc. • Carrollton TX 75006
(214) 245-1265 • FAX: 214-245-0752
Cypress Electronics • Dallas TX 75220
(214) 869-1435 • FAX: 214-869-9418

WASHINGTON

Murphy Electronics • Redmond WA 98052
(206) 881-1234 • FAX: 206-881-2806

WISCONSIN

Bell Industries • Waukesha WI 53186
(414) 547-8879 • FAX: 414-547-6547

CANADA

Carsten • Scarborough Ontario Canada M1W3K6
(416) 495-7705 • FAX: 416-495-7079

LITERATURE: HARDWARE**Lord Industrial Products**

Vibration/Shock/Noise Control Products
Elastomeric Flexible Couplings
Engineered Elastomeric Products



LORD Industrial Products
A Division of Lord Corporation

Booklet explores industrial products

This illustrated 132-pg catalog gives detailed information about the vendor's selection of rubber bonded-to-metal industrial products. Among the instructional sections of the book are a designer's guide that includes engineering theory; a section that provides the data required for an industrial application analysis; and selection guides for general mounts and shipping container mounts. The book features drawings, selection and performance data, dimensions, typical applications, and installation details.

Lord Corp., Industrial Products
Div, Box 10040, Erie, PA 16514.

Circle No 741

Directory of ESD-control products

Three 4-in.-post binders contain the vendor's "yellow pages" of the CPF (Control Products File) Consulting Service for ESD-control products. The reference work is updated quarterly and is organized for comparative analysis of products. It's arranged in seven major categories: chemicals & raw materials; ionizers; meters and instruments; packaging;

personal protection; workstation products; and miscellaneous (tools, tapes, etc). More than 2000 pages of data sheets, indexes, directories, and selection tables are included in the document. In US, first-year subscription, \$335; renewal, \$195. In Canada, \$375 and \$225, respectively; elsewhere, \$425 and \$260, respectively.

SAR Associates, 1212 E
Dominick St, Rome, NY 13440.

INQUIRE DIRECT

Pamphlet sums up cable-connector assembly

The vendor's brochure VA-3 explains its cable-connector assembly program, which provides custom preassembled flexible-cable inter-



connections, fiber-optic assemblies, and mass-termination systems. The publication stresses how the vendor's authorized centers allow OEMs to cut costs in the areas of assembly tooling and production space, testing, waste, personnel, and inspection, and how the centers allow OEMs to ensure system stability.

Thomas & Betts Corp, 1001
Frontier Rd, Bridgewater, NJ 08807.

Circle No 742


Using a prototype hardware verification of ASICs

The 118-pg book, *Verification Solutions: A Guide to Design Verification and Test*, helps you with IC design and test, as well as prototype hardware verification of ASICs and semiconductor parts. The paperback book explains how

prototype verification bridges the steps between computer-aided design and production test. It illustrates each step in the hardware verification process with examples of specific tasks and solutions.

IMS, 9400 SW Gemini Dr, Beaverton, OR 97005.

Circle No 743

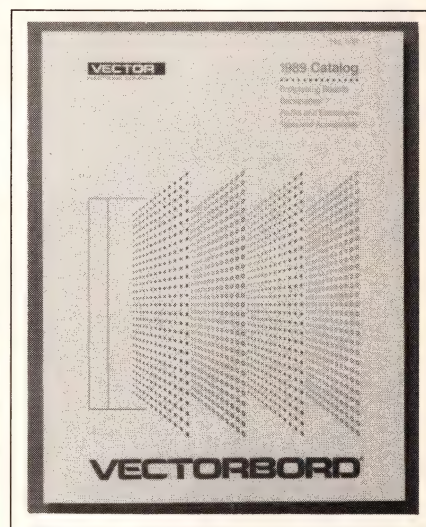

Catalog presents prototyping products

The vendor's redesigned catalog provides a concise and easy-to-use source of prototype electronic circuits. The 102-pg, illustrated book examines general-purpose Vectorbord prototyping boards and bus-specific prototyping boards (IBM, Apple, STD Bus, S-100 Bus, Motorola Excerciser, Multibus, Commodore, and DEC). It also includes Eurocard metric prototyping boards, packaging (Vector-Pak), and general-purpose backplanes. The publication features selector guides and index tabs to help you make your selection.

Vector Electronics Co, 12460 Gladstone Ave, Sylmar, CA 91342.


Circle No 744

Updated guide to precision drive-train components

This 224-pg revised catalog of precision drive-train components features both inch and metric products such as precision gears, brakes, ball bearings, couplings, and specialty hand tools. The booklet includes specifications, diagrams, and application and ordering information.

Precision Industrial Components, Box 1004, Middlebury, CT 06762.


Circle No 745

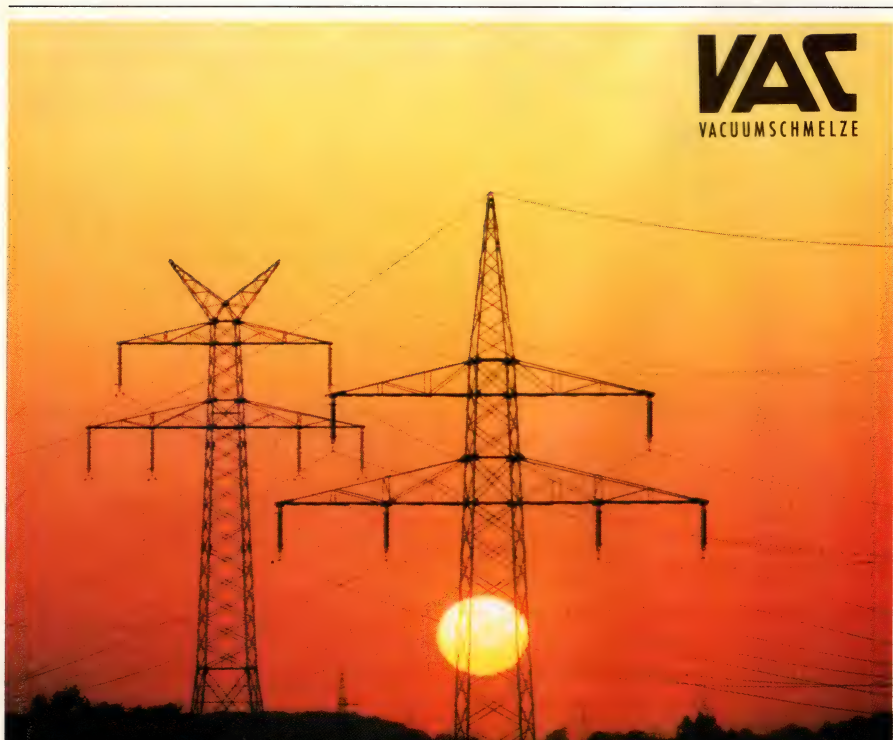

Solar Power Needs VACODYM®

VACODYM is the trade name of high performance permanent magnets made by VACUUMSCHMELZE. The magnets are based on NdFeB alloys and have the highest energy density currently available.

This property provided the impetus for the use of VACODYM magnets in the drive motors of several different solar powered vehicles. Crucial factors are high efficiency and a high torque combined with light weight and compactness. VACODYM meets all these requirements as the diagram on the right and the race results prove. The solar powered vehicle Dyname won the third "Tour de Sol" and Lizzy and KR200 were right up front in 1988. Contact VAC for more information on VACODYM for applications which have a promising future.

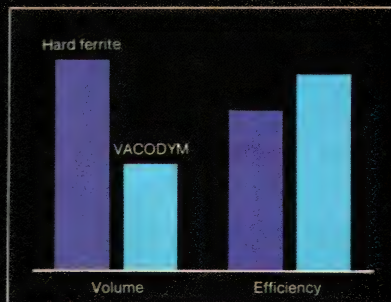

The influence of permanent magnet materials on the design of Electric Motors

® = registered trade mark of Vacuumschmelze GmbH under licence from Sumitomo Special Metals

VACUUMSCHMELZE GMBH

Germany: Grüner Weg 37, D-6450 Hanau 1 · P.O.Box 2253 · Phone: (061 81) 362-1
Telefax: (061 81) 362 645 · Telex: 4184 863 vac · Teletex: 61 818 201 = vac

Agency USA: 186 Wood Avenue South · Iselin, N.J. 08830 · Phone: (201) 494-3530
Telefax: (201) 3 213 050 · Telex: 4 900 006 431

INTRODUCING THE BUD HOUSE OF PLASTICS

Now BUD offers a complete line of desk-top instrument cases and utility boxes made from light weight, impact-resistant plastics. Choose from 9 styles, 29 sizes and a variety of finishes to meet your enclosure needs.



BUD EAST, INC.
4605 East 355th Street
P.O. Box 431
Willoughby, Ohio 44094
(216) 946-3200
FAX: 216-951-4015




BUD WEST, INC.
7733 West Olive Avenue
P.O. Box 1029
Peoria, Arizona 85345-0350
(602) 979-0300
FAX: 602-878-5371

CIRCLE NO 152

For Bud's "House of Plastics" catalog request Form Number HP-89.


TAPE MEMORY SYSTEMS

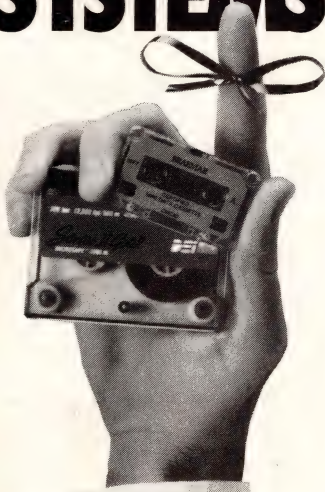

Braemar continues to refine and define the mini-cassette, standard cassette and cartridge tape market. Our latest offerings include...

MINI-CASSETTE DRIVES

Utilizing low cost mini-cassette media, 136K memory and unbeatable pricing. These are the most reliable, cost-effective drives you can buy.



PRO-LOADER PORTABLE CASSETTE DRIVES

Economical, self-contained, stand-alone RS 232 based

systems capable of reliable data acquisition, storage, and program loading.

CARTRIDGE TAPE DRIVES

High speeds and high storage capacities in a 3.5" or 5.25" half height form factor. Designed for the DC 2000 cartridge media. These drives represent a breakthrough in performance, ease of integration, and user convenience.




Braemar
CARLISLE

Braemar Corporation
Div. of Carlisle Corp.
11400 Rupp Drive
Burnsville, MN 55337
(612) 890-5135
TELEX 882169

For more information call:
1-800-328-2719

CIRCLE NO 153

LITERATURE: SOFTWARE

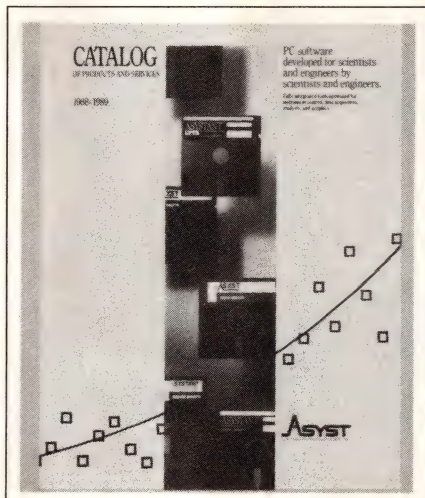

Scientific and engineering PC software

The vendor's 20-pg catalog provides a tutorial for PC-based data acquisition and analysis. The publication describes both menu-driven and fully programmable software packages for analysis, statistics, graphics, and data acquisition, and for instrument interface and control. Further, it provides a list of subjects and applications that use the company's products. Comparison charts of all products are included. The catalog also explains the company's training and support services.

Asyst Software Technologies Inc., 100 Corporate Woods, Rochester, NY 14623.

Circle No 735

Package helps you evaluate circuit-design series

This kit for qualified design engineers contains software and a 60-pg illustrated tutorial guide, which describes the Series II Tango-PCB and Tango-Route design-software programs. The guide details features such as pop-up menus, user-definable macros, on-screen prompts, context-sensitive help, and "Hot Spot" and "Speed Palette" aids.

Accel Technologies Inc., 7358 Trade St., San Diego, CA 92121.


Circle No 736

Book tells you how to simulate with Spice

According to the vendor, *Simulating With Spice* is the most comprehensive book available for learning the analog-circuit simulator, Spice. It contains a complete syntax reference guide for all Spice (Berkeley Spice 2G6) commands, elements, statements, and analysis capabilities. The tutorial section contains 12 problems and guides the user through each simulation. The section on advanced techniques and debugging allows the simulation specialist to delve deeper into Spice's operation. Finally, the book features an entire section of application notes, appendices containing netlists for each example in the tutorial section, an index, and a bibliography of more than 130 related references listed by topic. \$65.

Intusoft, Box 6607, San Pedro, CA 90734.

INQUIRE DIRECT

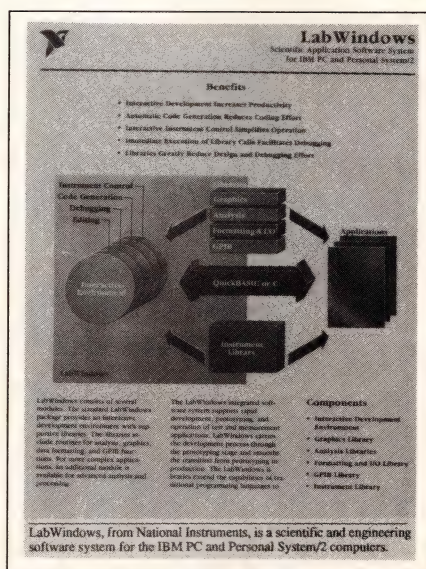

Brochures present instrumentation software

Two brochures describe the company's icon-based graphical programming systems: LabView 2 for Apple Macintosh personal computers and LabWindows for scientific application software that runs on the IBM PC, PC/XT, PC/AT, and

compatibles and the IBM PS/2. The LabView publication presents the system's features, including its instrument driver library, hierarchy, and block-diagram programming. The pamphlet about LabWindows illustrates and explains its multiple windows.

National Instruments, 12109 Technology Blvd, Austin, TX 78727.

Circle No 737



Booklet unveils vision systems

Featuring the vendor's 3000 Series single-board vision systems, the 6-pg foldout brochure highlights the gray-scale image processing feature, which, according to the company, allows the systems to perform image analysis and pattern recognition in varied light conditions. An applications section lists uses for the systems in the semiconductor, electronics, aerospace, pharmaceutical, and general manufacturing industries.

Cognex Corp., 72 River Park St, Needham, MA 02194.

Circle No 738

CNC for factory-floor environment

Excerpted from the vendor's 5-volume *Manufacturing Automation Series*, the 42-pg report, "Numerical Control Overview," reviews the

use of CNC (computer numerical control) systems in factory-floor environments. Comparison columns cover applications; control, operating, and programming features; diagnostics; and physical attributes of 47 numerical controllers from 18 vendors. The publication also outlines numerical control program-

ming languages and systems, helps you select a CNC system, and analyzes how CAD/CAM systems effect a CNC system in a computer-integrated manufacturing environment. \$35.


Datapro Research, 1805 Underwood Blvd, Delran, NJ 08075.

INQUIRE DIRECT

IF YOU WRITE IN C, THEN YOU SHOULD DEBUG IN C

The ultimate in time savings is obtained when you debug your code in the same language it was written. Code development is accelerated as constant program printouts are no longer necessary. All displays of your program, including the real-time trace buffer, are in the form you specify, with options for Source only, Source and assembly or assembly only. Use your favorite C or PL/M compiler with our emulation system and SourceGate™ to enhance productivity of your engineering department. If you are working with different microprocessors, SourceGate provides the same interface for each, so learning curves are almost nonexistent when switching between projects or processors.

HMI enhances this software capability with the most advanced line of in-circuit emulators on the market today. SourceGate runs on all IBM PC family computers, Sun Workstations and many Unix systems.

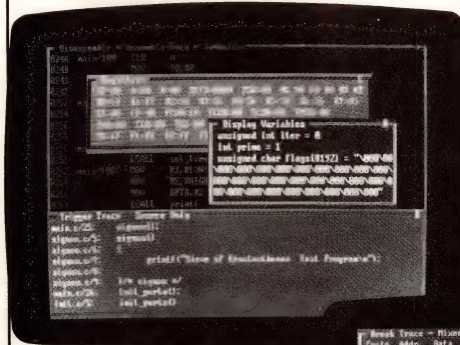


Supported Processors:

8051 Family	
68HC11	64180/Z180
Z80	68000 Family
6809	8085

Now supporting the 68020 and the 8096/196 family and offering Software Performance Analysis for all units!

Sun Workstations is reg. TM, Sun Microsystems, Inc. IBM is reg. TM, International Business Machines, Inc. Unix is reg. TM, Bell Laboratories, Inc.

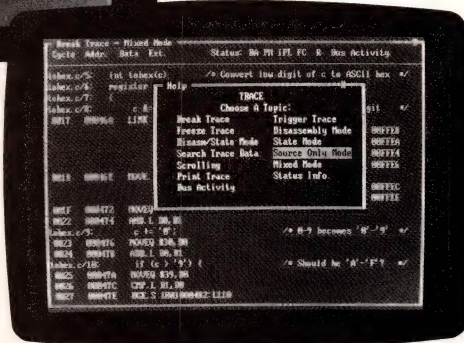

For complete details, contact:

Huntsville Microsystems, Inc.

P.O. Box 12415, 4040 South Memorial Parkway, Huntsville, AL 35802
(205) 881-6005 TWX: 510-600-8258 FAX: 205-882-6701

CIRCLE NO 154

Pamphlet surveys software for IBM PC and PS/2 Series

The vendor's brochure introduces Lotus Measure data-acquisition and instrument-control software for IBM PC, PC/XT, PC/AT, PS/2, and compatible computers. The 6-pg foldout pamphlet illustrates how Measure acquires data, and how you can manipulate and present the data once it is acquired. The publication also details the technical background information, illustrated with screen displays.

National Instruments, 12109 Technology Blvd, Austin, TX 78727.

Circle No 739

Guide to IEEE-488.2 command interface

The vendor's application note, *Getting Started With IEEE-488.2*, presents this IEEE-488.1-standard ex-

tension, which focuses on the software aspects of automated systems. The note is principally intended to support the company's 1281 Selfcal DMM, one of the first instruments to incorporate the IEEE-488.2 command and message-exchange interface. The guide is expected to be of primary interest to users who are already familiar with IEEE-488 (1978) systems.

Datron Instruments, Wavetek Corp, Box 85434, San Diego, CA 92138.

Circle No 740

Exploring the benefits of network licensing

The 300-pg report, *License Servers: New Pricing and Marketing Possibilities for Software on a Network*, examines the new technology of network licensing that allows applications (or licenses to use applica-

tions) to be easily moved around on a network. According to the vendor, this report is the only source with so much information so clearly defined on this technology. The paper shows that by using network licensing, users are no longer restricted to using software on a single, predefined computer; instead, users can easily share software, thus freeing up software budgets for the purchase of new types of software, or for hardware products, such as workstations. \$5000.

Marketshare Inc, 21 Cochituate Rd, Wayland, MA 01778.

INQUIRE DIRECT

Now available on
the Sun-3™ family of
workstations

Integrated Circuit

THEN.

Do you still rely on bulky, cumbersome catalogs, hard-to-use microform, and out-of-date datasheets when you need to find a new IC or replace an old component?




Are you wasting time trying to find the information you need rather than productively working on your projects?

Does your office look like it's inhabited by a compulsive paper collector?

Well, burn your catalogs, shred your datasheets, and donate your micro-media to your favorite museum!

We've got great news for you. . .

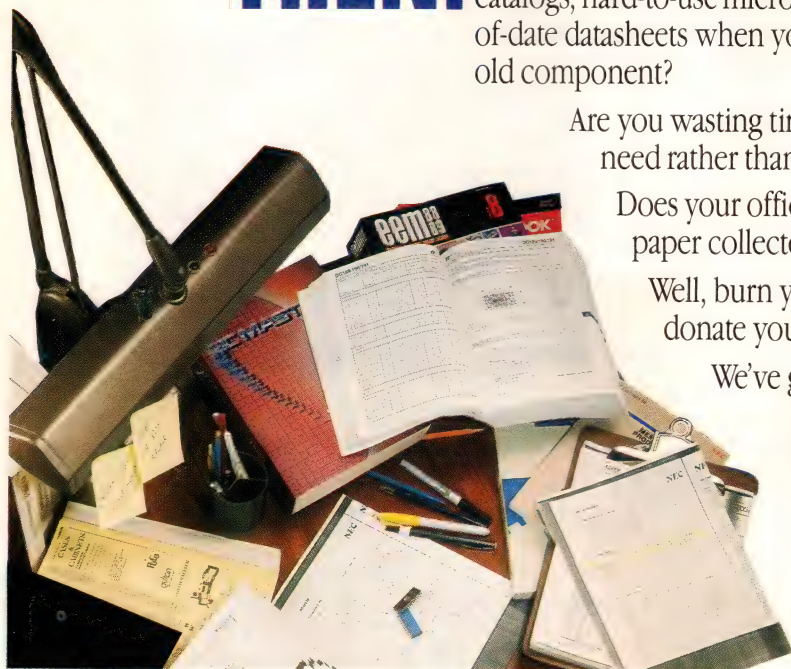

Get maximum density and flexibility with Die-Tech's fine-pitch SM packages.

Die-Tech's NEW Surface Mount Packages are designed to meet JEDEC solid state product outlines. These quality Surface Mount Packages offer you: high density, flexibility, increased electrical performance, high reliability and ease of assembly.


In addition, both sides of the substrate can be used and protective bumpers offer safe handling prior to and during assembly. Packages are leaded and preformed for surface mounting.

For additional information write or call: Die-Tech, Inc., 295 Sipe Road, York Haven, PA 17370. (717) 938-6771 • FAX (717) 938-6099.

die-tech
Engineered productivity.

CIRCLE NO 155

AUDIO MIX

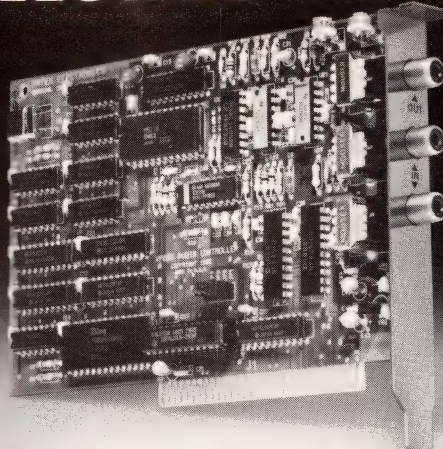

2-audio inputs...software controlled...1-output. Anything you can sing, say or play the VP635 Audio Processor can record or playback...20Hz to 7kHz.

Be creative. Mix inputs. Attenuate background music...mix with digitized voice...output either or both as full fidelity audio. For digital broadcasting, film editing, personal service terminals and other interactive video applications.

Technically, 10-bit, 16K sampled audio inputs are compressed to 4-bits ADPCM digital data for hard disk recording on your PC/XT/AT/386 or compatible.

Call 1-800-338-4231 (ex. CA) for VP635 facts...the digital audio board your PC can talk and sing about.

ANTEX ELECTRONICS

16100 S. Figueroa St. • Gardena, CA 90248 • (213) 532-3092 • FAX (213) 532-8509

CIRCLE NO 156

Search and Selection

NOW. Take a look at this! The clutter is gone. And you've got fast, easy access to complete information on more than 425,000 ICs and semiconductors available from over 375 manufacturers worldwide.

This is CAPS. It's new. It's different. And it will change the way you work.

CAPS puts the information you select — including specific, complete datasheets — at your fingertips. Now you can do comprehensive searches and make important component decisions faster and easier than you ever imagined!

To learn more, call toll-free:
1-800-245-6696

CAHNERS
CAPS
Computer Aided
Product Selection

275 Washington Street
Newton, MA 02158-1630
Telephone: 617-558-4960
Facsimile: 617-969-6949
Telex: 940573

CIRCLE NO 157

UPDATED
MONTHLY!





Lighter, thinner, brighter.

The difference is dramatic. Because Toshiba's new single-layer M-ST LCD modules are 25% lighter and 15% thinner than double-layer panels. And their high-contrast and brightness make them easier to see.

The M-ST LCD module from Toshiba. Lightweight, thin, easy to see. A new industry standard in monochrome LCD performance. All in all, quite a feather in our cap.

- Two sizes available: 640 × 400 dots (TLX-1501-C3M) and 640 × 480 dots (TLX-1551A-C3M)

In Touch with Tomorrow
TOSHIBA

For further information:


Toshiba America Electronic Components, Inc., Chicago Office: One Parkway North, Suite 500, Deerfield, IL 60015-2547 Tel: 312-945-1500
Eastern Area Office: 25 Mail Road, 5th Floor, Burlington, MA 01803 Tel: 617-272-4352 Fax: 617-272-3089
North Western Office: 1220 Midas Way, Sunnyvale, CA 94086 Tel: 408-737-9844 Fax: 408-737-9905

EDN PRODUCT MART

This advertising is for new and current products.

Please circle Reader Service number
for additional information from manufacturers.

SMA ADAPTORS

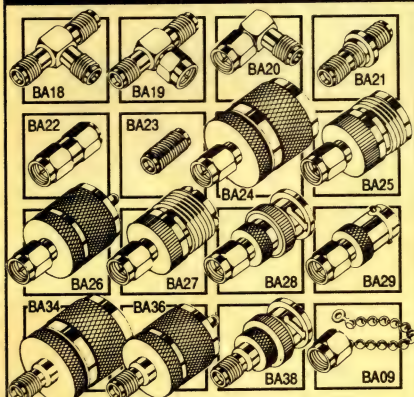

Prompt delivery on these and SMA connectors or ready made cables in standard or custom lengths.




1755 Osgood St., N. Andover, MA 01845
Orders 800 343-1455 • FAX 508 689-9484
Inquiries 508 682-6936

CIRCLE NO 325

68HC11

PC-based emulator for 68HC11



- PC plug-in or RS-232 box.
- Pull-down menus with full window support, combined with command-driven User Interface.
- Up to 3.3MHz real time emulation.
- No intrusions to the 68HC11's resources.
- 48 bit wide 16K deep trace. All functions usable without disturbing emulation. Time stamping. Two level trigger.
- Symbolic and C Source Level Debugging, including in-line assembler and disassembler.

PRICES: 64K Emulator and pod \$2590*
4K Trace \$1995*

CALL OR WRITE FOR FREE DEMO DISK!

NOHAU
CORPORATION

51 E. Campbell Avenue
Campbell, CA 95008
FAX (408) 378-7869
(408) 866-1820


*U.S. only

CIRCLE NO 326



"The Best 8051 Emulator"

NEW
Source Level
support for
PL/M-51
and C-51



5 ft. cable

8051

See EEM 88/89
Page D-1304

PC based emulators for the 8051 family

(8051/51FA/52/31/32/44/152/451/452/535/552 + CMOS + more ...)

- PC plug in boards or RS-232 box
- Pull-down menus combined with Command-Driven User Interface. Context sensitive help and On-Screen Editing of data
- 20 MHz real time emulation
- 128K emulation memory
- 48 bit wide, 16K deep trace buffer with loop counter
- Program Performance analyzer
- Powerful Macros with IF-ELSE, REPEAT-WHILE structures
- Source Level debug for PL/M-51 and C-51
- Symbolic debugging with in-line assembler and disassembler
- Execution time counter
- Trace can be viewed during emulation!

PRICES: 32K Emulator for 8031 \$1790* 4K Trace \$1495*

CALL OR WRITE FOR FREE DEMO DISK!


Ask about our demo VIDEO!

*U.S. only

NOHAU
CORPORATION

51 E. Campbell Avenue
Campbell, CA 95008
FAX (408) 378-7869
(408) 866-1820

CIRCLE NO 327



**LOW COST
INTERFACE
CARDS FOR
PC/XT/AT**

RS-485/422 Card [PC485] \$95/125

- Serial Async. Communication up to 4,000ft; 2 or 4 wires; NS16450 UART;
- COM1-4; Max. Baud Rate 56KB. High speed version (256KB) - \$165.
- Dual drivers/receivers; Handles 64 devices; Compatible with most comm. swtr.
- DB9 or phonejack. Sample communication software available - \$50/150

IEEE-488 Card [PC488A] \$145

- Includes INSTALLABLE DOS DEVICE DRIVERS and support for BASIC.
- Additional Support for ASSEMBLY, C, Pascal and FORTRAN - \$45 (all)
- IRQ (I-6). DMA channel 1 or 2. Up to 4 boards per computer.
- Compatible with most IEEE-488 Software packages for IBM-PC (e.g. ASYS-TANT-GPIB, Lotus Measure). Compatible with NI's GPIB-PCIA.

IEEE-488 Card [PC488B] With Built-In Bus Analyzer \$345

- Software Support for BASIC, QuickBASIC and GWBASIC (PC488C only)
- Additional libraries for C, Pascal, FORTRAN, Assembly available - \$45 (all)
- Powerful menu-driven BUS ANALYZER runs in the background while 488 programs or commands are executed. Features Program Stepping, Break points, real time bus data capture (4K buffer), instant screen toggling.
- Complete Controller / Talker / Listener capability. Based on TI's TMS-9914.
- NEC-7210 based card (compatible with Nat. Instruments PCIB/PCIA) - \$445.

A/D + D/A + DIO + Counter \$295-995

- 8/16 differential/single ended Input Channels; 12-14 bit Resolution; Conversion Speed 25-110K/sec; Input Range ±0.5V to ±10V. Programmable pacer.
- D/A: 1/2 channels; 12-14 bit Resolution; DIO: 16Out/16In, TTL compatible.
- Programmable Interval Counter/Timer; Uses Intel 8253/8254.

MC / VISA / AMEX

Call today for datasheets!



B&C MICROSYSTEMS INC.
355 West Olive Ave. Sunnyvale, CA 94086
TEL: (408) 730-5511 FAX: (408) 730-5521

CIRCLE NO 328

POWER SUPPLIES HAVE GROWN - SMALLER



MODEL CPS264
Very low profile

SIZE: 4.70(W) x 9.30(L) x 1.15(H) open frame
INPUT: 95-135VAC and 190-260VAC automatic ranging, 47-400Hz
OUTPUT: DC +5V @30A, -5V @1A, +12V @8A and -12V @1A, Total 265W maximum

LINE REGULATION: 0.1% (2A min load current is recommended on +5V)

LOAD REGULATION: 0.2% on +5V, ±5% on other outputs (10% to full load)

OVERLOAD PROTECTION: Current fold back mode, self recovery

RIPPLE AND NOISE: 50mV P-P maximum @20MHz band width

EFFICIENCY: 85% typical @ 1/2 to full power

OPERATING TEMPERATURE: Case and ambient 55°C max. Above 50°C, use 15CFM min cooling air

STORAGE TEMPERATURE: -40 to +85°C

GENERAL: All the heat generating active components are mounted on the base of power supply chassis for best heat transfer.

All the magnetic components are made of toroid core to minimize radiation

AC input voltage selection is automatic
200KHz switching frequency PWM control


Classic Design
PRODUCTS

7090 Miramar Road, Suite B
San Diego, CA 92121
619-271-9595
FAX 619-566-9595

CIRCLE NO 329

DEVICE LEADER

The PROM/PLD Programmer most recommended to buy:
ALLPRO™ now PC based or Stand-Alone



ALLPRO is the only true pin driven system that has performed flawlessly over a range of 1800 devices. Recommended by IC manufacturers as the most flexible and well supported product, it now can be offered fully integrated with the most popular PLD design software: CUPL™. Successful design projects mean having the most successful design tools. Get an ALLPRO demonstrated to you today!

LOGICAL DEVICES, INC.

1201 NW 65th Place, Fort Lauderdale, Florida 33309
(305) 974-0967, Toll Free (800) EEI-PROM, Telex 383142
© 1988 Logical Devices, Inc.

CIRCLE NO 330

To advertise in Product Mart, call Joanne Dorian, 212/463-6415

Truly, Affordable **\$495** End-to-End Package

Not Copy Protected!!

DC/CAD IV™ - Level 1

Design Computation revolutionizes CAD industry with new low-priced DC/CAD IV - Level 1 with no copy protection! Ideal for Surface Mount work, package enables design, layout and autorouting of PCBs by offering:

- High Capacity Schematic Capture
- Multi-strategy Autoplacer
- Gridless "1-mil" Parts Placement and Autorouting
- Interactive Routing with Diagonal Turbo Hugger
- Gridless, Diagonal RipUp/Retry Autorouter
- Thorough Annotating Design Rule Checker
- Full 2-way GERBER support
- Full 2-way DXF support

Several high performance packages available.

**DESIGN
COMPUTATION** CALL TODAY.

Route 33 Sberman Square, Farmingdale, NJ 07727
(201) 938-6661 FAX: (201) 938-6662 Telex: 510 601 8352

RipUp/Retry
Autorouter tool!


CIRCLE NO 331

✓ **DATA I/O PROGRAMMERS:
GREAT, H/W FLEXIBLE.**

✓ **SAILOR PROGRAMMERS:
GREAT, S/W FLEXIBLE.**

Find out why. Please call for a free demo disk.
Sailors support: ★ 7ns PALs ★ 12ns GALs
★ 2-MEG EPROMs ★ PROMs ★ EEPROMs
★ EP900 ★ EP1800 ★ 8751 and many more

**1-800-627-2456
FAX 408-736-2503
Advin Systems Inc.**

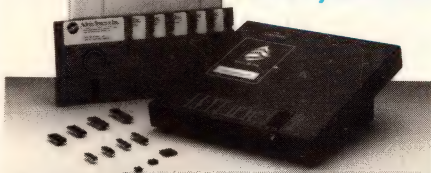

Data I/O: trade mark of Data I/O Corp. ★ Sailor: trade mark of Advin Systems Inc.

CIRCLE NO 334


Free MSDOS & Mac Software Catalog for Electronic Engineers

AC/DC Circuit Analysis • Active and Passive Filter Design • Screen/Printer & Pen Plotter Graphics for Engineers • LaPlace Transfer Function/FFT Analysis • Logic Simulation • Root Locus Analysis • CAD/CAE • Digital and Analog Signal Processing • Curve Fitting • Statistics • Thermal Analysis • Math • Microstrip Design and Analysis • Data Acquisition • VISA & M/C Accepted

BV Engineering
Professional Software

2023 Chicago Ave., Suite B-13 • Riverside, CA 92507
Tel: (714) 781-0252 • U.S.A. • TELEX: 6503089864

CIRCLE NO 337

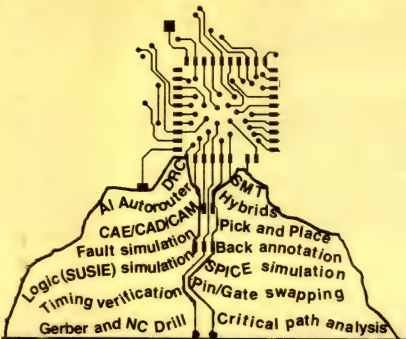

Attention AutoCAD® Users:

Unleash your hidden power with

AutoPCB™

Call Cadisys at (408) 732-1832
624 E. Evelyn Avenue, Sunnyvale, CA 94086

CIRCLE NO 332

C for the 8051 Compare:

Benchmark Results — Sample program:
Eratosthenes sieve Program from BYTE (1/83),
expanded with I/O and interrupt handling.

	Archimedes ICC51 v2.20A	MCC51 v1.2	FRANKLIN C51 v2.1
Compilation time	12 sec ✓	18 sec	17 sec
Linkage time	29 sec	9 sec	6 sec ✓
Execution time	11.45 sec	9.00 sec	0.88 sec ✓
Total code size	5318 bytes	3798	1726 ✓
Sieve module size	736	1021	541 ✓


Call now for your free DEMO disk.

FRANKLIN
SOFTWARE, INC.

888 Saratoga Ave. #2 • San Jose, CA 95129
(408) 296-8051 • FAX (408) 296-8061

CIRCLE NO 335

PWM SERVO AMPLIFIER




Models 30A8, 25A17 and 20A20 are ultra small high performance PWM Servo Amplifiers. Operating efficiency is over 97%. Switching frequency is 33KHz. All models are fully protected against over-voltage, over-current, over-heating and shorts between motor leads and motor and power leads. Adjustable current limit. Four quadrant operation. Maximum peak output power for model 30A8 is $\pm 80V @ \pm 30A$, model 25A17 is $\pm 170V @ \pm 25A$ and model 20A20 is $\pm 200V @ \pm 20A$.

Advanced Motion Controls

15921 Haynes St., Van Nuys, CA 91406
818-989-4480 FAX 818-786-5762

CIRCLE NO 338

STD ANALOG I/O CARDS

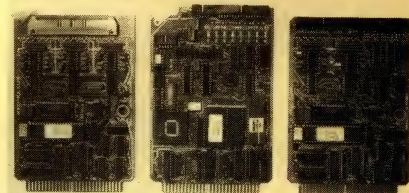


Up to 16 analog inputs and 8 analog outputs w/ 12 bit resolution on one card. Throughput rates from 3 kHz to 59 kHz. TTL or CMOS. Convert on demand or intelligent operation w/ on-board micro w/ FIFO I/O buffer and many preprogrammed modes. Or program it yourself w/ 96K bytes on-board memory. Intelligent slave or standalone operation w/ serial port. Input filters, prog. gain amp. sample-hold.

ROBOTROL CORP.

925 W. San Martin Ave., San Martin, CA 95046
(408) 683-2000


CIRCLE NO 333

CONNECTION WITHOUT DETECTION

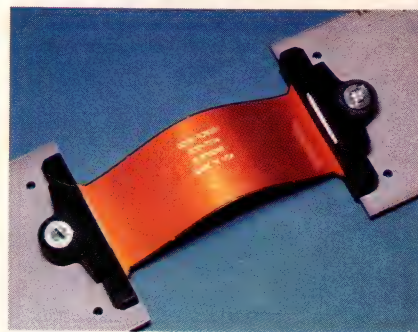

INVISICON® Controlled Impedance Connectors preserve transmission signal quality in very high speed/high density digital applications. Low dielectric constant flex circuit has contacts on 10-25 mil pitch. Standard 51-contact part available. **Rogers Corp.**, One Tech. Dr., Rogers, CT 06263 203/774-9605

CIRCLE NO 336



SuperCAD™
Schematic entry
Software
for the IBM PC &
Compatibles
ONLY

\$99.00

COMPLETE PACKAGE

- ★ Easy-to-use schematic entry program for circuit diagrams, visible on-screen and pulldown menus
- ★ Supports popular graphic standards, mouse and printers
- ★ Powerful editing and drawing commands
- ★ Extensive digital, analog and discrete part libraries
- ★ In-depth, readable instruction manual has many examples and illustrations
- ★ Software includes part building, and netlisting
- ★ A compatible P.C. board layout software (\$99) and routing software (\$89) available

Write or call for demo disk:

MENTAL AUTOMATION, INC.

ORDERS/INFORMATION:

Send check or money orders to:

Mental Automation, Inc., Dept. S-9, 5415 136th Place S.E.,
Bellevue, WA 98006 or call (206) 641-2141
Visa/MasterCard orders accepted!
Dealer inquiries welcomed.

CIRCLE NO 339

To advertise in Product Mart, call Joanne Dorian, 212/463-6415

NEW
AMX 386

**REAL-TIME
MULTI-TASKING
KERNEL**

for protected mode 80386

- No royalties
- C language support
- Preemptive scheduler
- Time slicing available
- Configuration Builder
- List Manager
- 20 us task switch at 16 MHz (no waits)
- Intertask messages
- Message exchanges
- Dynamic operations
 - task create/delete
 - task priorities
 - memory allocation
- Event Manager
- Semaphore Manager

Source Code Included

Manual only \$75 US
AMX 386 \$3995 US


KADAK Products Ltd.
206 - 1847 W. Broadway
Vancouver, B.C., Canada
V6J 1Y5

Telephone: (604) 734-2796
Fax: (604) 734-8114

Also available for 8086, 80286, 8080, 286, 68000.

CIRCLE NO 340

INCANDESCENT(ITIS)?

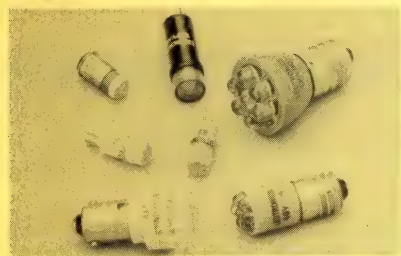

OUR BASED LED'S *a sure cure!*

Directly Replaces Lamp #327/387, 714, 6839, 7387, 755, 47, 85, 1835, 24E, 120MB, 120 PSB & Hundreds More. 10 to 20 yrs. Life at Fraction of Power. No Shock/Vibration Failures. Multichips, Clusters, BiPolar, BiColors. Choice of 7 Colors.

LED™ Put More LIFE in Your LIGHT

LEDTRONICS, INC. TEL: 213-676-7996
FAX: 213-676-0108 TLX: 494-5454
4009 Pacific Coast Hwy., Torrance, CA 90505

CIRCLE NO 343

we make innovation work for you

Eaton new rocker switches.
They're a snap.


The new Series 8090 Intermediate Rocker Switches easily snap into industry standard 22mm x 30mm panel cut-out. Optional sub-panel mounting housing available. U.L. recognized, C.S.A. Certified, and VDE approved. Rocker or paddle actuators. Wide range of actuator and bezel colors. Quick connect terminals are .250" wide and tin-plated for easy soldering. Single or double-pole, single throw. Economically priced at \$0.91 in 1,000-piece lots.

Eaton Corporation, Aerospace & Commercial Controls Division, 4201 N. 27th St., Milwaukee, WI 53216.

EATON

CIRCLE NO 346

INDUSTRIAL CONTROL - DATA ACQUISITION for IBM PC/XT/ATs, 386 ATs



- Low Cost A/D-D/A Card (Only \$99)
- 12-bit & 16-bit A/D, D/A, A/D-D/A Cards, uses high quality **BURR-BROWN, ANALOG DEVICES** chips
- 8255 Industrial Control (\$95)
- IEEE 488/GPIB Call
- RS-422 boards Call
- 4-Serial 1-Parallel Multi-I/O Card (\$195)
- Diagnostic/Utility Software, Technical Manual, Sample ASSEMBLER/BASIC programs included

CALL TODAY FOR FREE PRODUCT CATALOG
OEM/Reseller/Dealer Enquiries welcome

SINGULAR TECHNOLOGY CORPORATION
2115 W. Crescent Ave., Suite 221, Anaheim, CA 92801
Phone: (714) 491-1088 FAX: (714) 491-3517

CIRCLE NO 341

FREE 26 Page CATALOG with all styles and designs of matching instrument knobs illustrated.

*Fax us your specs—we will
Fax you a quote...immediately!*

Buckeye
555 Marion Road
Columbus, OH 43207
Fax: 614/445-8224 Phone: 614/445-8433

CIRCLE NO 344

Free PC Software

**INTELLIGENT
ACQUISITION & CONTROL
COMPUTER**

The SBS-250 handles complex control and data acquisition problems with a single card. Its small size and ease of integration are ideal for embedded systems. Use your PC to develop the software. System includes CAMBASIC™, a fast, industrial compiler. Write your program and save it to on-card EPROM or EEPROM programmer. Programs autorun on powerup. CAMBASIC supports all the hardware features including interrupts:

- 4 analog input channels with 12-bit resolution
- keypad input
- real time clock
- networking option
- 32 parallel I/O lines
- 2 RS-232C serial ports
- sound and PWM outputs
- 9 counters and 8 timers

Drives Opto 22 module racks. 4.5" x 6.5". 5V only CMOS circuitry. Other models available. Call 303-430-1500 for complete catalog. Unit price is \$395.

OCTAGON SYSTEMS CORPORATION 6510 W. 91st Ave.
Westminster, CO 80030

CIRCLE NO 342

STOP NOW START

ONLY \$325.00

THE VVM

DIGITAL VIDEO VOLT METER

DRAGGING A SCOPE ALL OVER MEASURING VIDEO WITH DIGITAL ACCURACY

*** HAND HELD ***

- Measures sync, peak white, & composite video amplitude.
- Measures in volts peak-to-peak & I.R.E. units.
- Measures with digital accuracy, 1% ± 1 count.
- Hand-held, battery-operated with automatic shut-off.
- Easy reading 3 digit, 1/2" LCD display.
- Connect and measure, no set-up or calibration.
- Tilt-up stand, BNC connectors.
- Optional rechargeable battery pack.
- Tests NTSC or PAL signals.
- Bridging loop-through or terminated measurement.
- Read video levels in full daylight.
- No guesswork or interpretation.

(714) 979-3355 F M SYSTEMS, INC. FAX
(800) 235-6960 3877 S. Main Street
Santa Ana, CA 92707 (714) 979-0913

CIRCLE NO 345

IEEE-488

488 (GP-IB, HP-IB) control for your PC/XT/AT

Control instruments, plotters, and printers. Supports BASIC, C, FORTRAN, and Pascal. Fast and easy to use. High-speed DMA. Software library included so you spend less time programming. Thousands sold. Risk free guarantee. Hardware and software - \$395.

Product literature 1-800-234-4CEC
Technical assistance 617-273-1818

cec Capital Equipment Corp.
Burlington, MA. 01803

CIRCLE NO 347


These top-quality 19" rack-mount chassis are made of heavy gauge aluminum and/or steel. The front brushed aluminum panel is anodized in black or clear. Dimensions are 1 to 6 rack unit height by 8", 10", 12", 14" and 20" depth. Most orders will be shipped within 24 hours. Custom made enclosures are available upon request.

ANGO 16 NORTH THIRD STREET
HARRISON, NJ 07029
TEL: (201) 484-1115 FAX: (201) 484-0530

CIRCLE NO 348

To advertise in Product Mart, call Joanne Dorian, 212/463-6415

FIX/PGA/LCC/TEST ADAPTOR




MANY NEW PARTS

VLSI prototype adaptors allow prototyping of devices from 24 pin (VRAM ZIP), Shrink DIP, to 256 pin SPARC, PLCC, LCC, SLAMPAK, and FLATPAK. Annotated test adaptors for 680X0, 80X86. Stacking memory modules for up to 16 MBYTE DRAM SIMMS. **FIX-80386** to fix errata 21 problem in 386 PC's (causes lockup). All gold Machined pins/ most wirewrap panel patterns. **Customs - quick turnaround.**

IRONWOOD ELECTRONICS, INC.

P.O. BOX 21-151
ST. PAUL, MN 55121
(612) 431-7025

CIRCLE NO 349

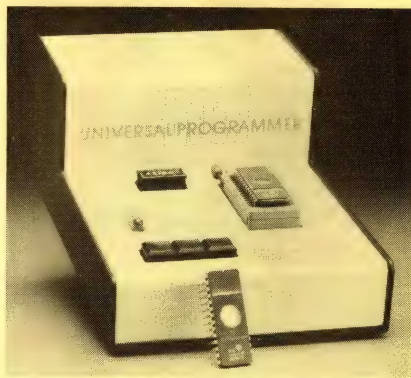

New EPROM Programmer

At \$495, Wintek's Universal EPROM Programmer is a low-cost and versatile tool for programming most industry-standard EPROMs (2716-27256). Since it can operate with an IBM PC, as well as stand-alone, the Programmer is ideal for use with PC-based microcomputer development software. Credit cards are welcome.

Wintek Corporation

1801 South St., Lafayette, IN 47904
(800) 742-6809 or (317) 742-8428

CIRCLE NO 350



Dimensions: 8.32" L x 4.22" W x 1.72" D

The HV1000 is designed for lab experiments, calibration, component testing and other applications that require very fast and clean high speed pulses.

FEATURES ■ Fast Rise Time ■ High Power
■ Voltage or Current Source
■ Positive or Negative Polarities

SPECIFICATIONS (Measurements into 50Ω)

- Pulse Width: 75ns to 10μs
- Rise Time: 6ns 900V (10-90%)
- Peak Power: 17kW
- PRF: Single shot to 1 MHz



Directed Energy, Inc.
2301 Research Blvd., Ste. 101
Fort Collins, Colorado 80526
303/493-1901 FAX 303/493-1903

CIRCLE NO 751

**SPECIAL
OFFER**

PHOTOPLOT

AUTOROUTE

SCHEMA PCB

PCB, PLOT & DRILL
Regularly \$2,025
until August 31st
all three = \$1,495.
You save \$530!

Mainframe PCB layout features for your PC... + **FREE**, ongoing, 1-800 support... + our 30 Day Money Back Guarantee!



FREE DEMO KIT
1-800-553-9119 **OMATION**

CIRCLE NO 752

presenting
PADS
SUPERSTATION
for TOTAL
INTEGRATION

Obtain complete cradle-to-grave performance from your personal computer CAD system when performing electronic packaging design. From schematic capture to printed circuit design, to 100% completion autorouting capabilities, it's all here. Now you have one more reason you should be using PADS: Total Integration. Call our Sales Hotline today to receive a free Integrated Evaluation Package for the PADS-SUPERSTATION.

Call Your Local Authorized Dealer

CAD Software, Inc.
119 Russell St.
Littleton, MA 01460

In MA: (508) 486-8929
Outside MA: (800) 255-7814

CIRCLE NO 753

**Communicate
Weekly
to the electronics
OEM through
EDN's Magazine
and News Editions
Product Mart**

CIRCLE NO 754

MICROTRACKER™
Real-Time Software Analyzer/Debugger

NEW TARGETS SUPPORTED

The MicroTracker™ can significantly reduce the cost of your next real-time product development project. Advanced features speed software development and enhance quality assurance.

FEATURES


- 2K or 8K Trace Memory
- Interval Timer
- Performance Analysis
- RS-232 Interface
- IBM PC Software
- Symbolic Disassembly
- Low Cost from \$1295.

- Instruction Disassembly for Z80, 8085, 6502, 6802, 6809, 8031/8051, 80188/80186.

Call for Free Brochure

LOGICAL ADVANCES 52 W. HENDERSON RD., COLUMBUS, OHIO 43214 (614) 267-4405

CIRCLE NO 755

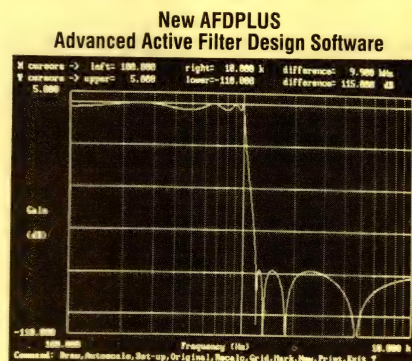


- Fully Interactive
 - On Screen Design & Evaluation
 - On Screen Editing
 - Menu Driven
 - Automated Installation
 - Schematic Display & Print
- Introductory price \$850.00 (price effective through 08/15/89)
Call for your **FREE DEMO DISK** (303)-499-7566 or to order AFDPLUS send check or purchase order to

RLM Research
P.O. Box 3630
Boulder CO 80307-3630



CIRCLE NO 756

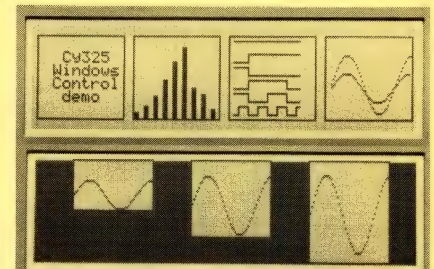

LCD WINDOWS CONTROLLER

The CY325 supports LCDs up to 128x240 pixels (16x40 char) with easy-to-use high-level commands and Parallel or Serial interface to host computer. The 256 built-in windows (or make your own) support window-relative text, graphics, plotting, bargraphs, waveforms, scroll/wrap/clip, etc. Read from an A/D and Write into Window! Separate text and graphic planes can be written or erased in any window. Eight pins support a variety of functions (soft-keys, waveforms) or can be used for GP I/O. Icons or special fonts can be user defined. Giant character mode, etc. Save months of design time with the CY325. \$75 CMOS \$20/1000s.




Cybernetic Micro Systems Inc.
P.O. Box 3000 • San Gregorio, CA 94074 • USA
Phone: (415) 726-3000 • Telex: 910-350-5842

CIRCLE NO 757

To advertise in Product Mart, call Joanne Dorian, 212/463-6415

EXPRO-40 PC-Based Universal Device Programmer

\$495

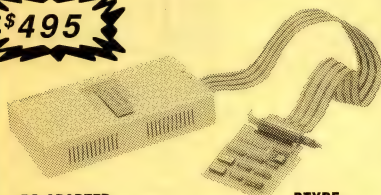

PC-ADAPTER
CARD

DTYPE
37 PINS CABLE

7 SOFTWARES AVAILABLE FOR POPULAR DEVICE PROGRAMMING

EPROM: NMOS or CMOS EPROM: 2816, 17A, 64A, 256A...
BPM: From 32x 8 to 4096 x 8 Bipolar PROM MMI, NS,
Signetics, TI, AMD, Motorola, Harris, Cypress MPU 8748:
8748, 48H, 49H, 41A, 42H, 41AH, 42AH, 48AH, 49AH
MPU 8751: 8751/H, 52/H, 44/H, 51BH, 52BH, C51, C252
PAL, EPLD, GAL, CMOS PAL: MMI, NS, TI, AMD, Cypress,
Lattice, 16R8, 20V8, 20L10, 22V10, 22G10, 16V8, 20V8.

Software update possible for new devices.

Songtech International, Inc.

44061 So. Grimmer Blvd., Fremont, CA 94538
Tel: (415) 770-9051 Fax: (415) 770-9060

CIRCLE NO 758

Modular I/O board

Single-slot Qua Tech PXB-721
for PC-AT has 72 digital I/O
lines. Connect three choices of
data acquisition modules.
Supports Labtech Notebook.™

For order info, call:
1-800-553-1170



QUA TECH, INC.
478 E. Exchange Street
Akron, OH 44304

Labtech Notebook is a trademark
of Laboratories Technologies Corp.

CIRCLE NO 759

Z-1000B UNIVERSAL PROGRAMMER




- PROGRAM THOUSANDS OF DIFFERENT DEVICES
- NO PERSONALITY MODULES REQUIRED
- DESIGNED FOR EASE OF OPERATION
- STAND ALONE AND MS-DOS DRIVEN
- SELF CALIBRATING
- QUICK FLIP LCC AND SMT ADAPTERS



SUNRISE ELECTRONICS, INC.
524 South Vermont Avenue, Glendora, California 91740
(818) 914-1926

CIRCLE NO 760

The MICRO88 an 8088 engine to power your product

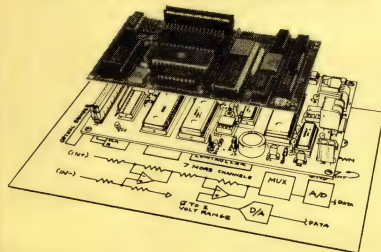


This small (3" x 5"), pre-engineered, μ module is designed to mount to your application specific interface board for minimum cost, no-snap development. Onboard resources include: watchdog timer, dual UART with RS-232 and RS-485, 8088 μ , 64K ROM space and 32K RAM space. Fully integrated high level language development environment (Basic, C, Fortran). We specialize in custom applications, both hardware and software.

VESTA TECHNOLOGY

7100 W. 44th Ave., Suite 101, Wheat Ridge, CO 80033
(303) 422-8088, FAX 422-9800, BBS 278-0364

CIRCLE NO 761

STOP NOISE IN PGA, LCC PACKAGES

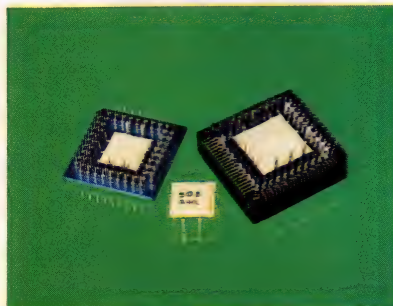

MICRO/Q 3000 decoupling capacitors stop low-inductance, high-frequency noise for PGA, LCC packages on complex board layouts. Fit them neatly under PGA or LCC sockets, use no extra board space. Choose from many pinout configurations.
Rogers Corp., 2400 S. Roosevelt St., Tempe, AZ 85282. 602/967-0624.


CIRCLE NO 762

Jameco JE680 Universal IC Programmer

Programs PROMs, EPROMs, EEPROMs,
PALs, GALs, RALs, EPLDs and PEELs

JE680 Features:

- Stand-alone or computer controlled modes w/ MS-DOS menu-driven software (included)
- Parallel and RS232C interface ports
- Auto-Sense™ of IC insertion
- Supports/translates between 18 data formats
- Full functional test on logic devices
- Over 400 IC definitions in ROM - no personality modules needed
- JEDEC standard supported, accepting input from virtually all major software packages
- One-Year Warranty
- Listing of over 400 programmable devices and 74-page catalog available upon request!




JE680 Universal IC Programmer\$1799.95

Jameco Electronics • 1355 Shoreway Road, Belmont CA 94002
• Phone (415) 592-8097 • FAX (415) 592-2503

CIRCLE NO 763

ECONOMICAL MINIATURE GEARHEAD




Sample quantities of a new series of economical precision gearheads are now available for immediate delivery. Micro Mo brand 16-22mm diameter gearheads will fit System Faulhaber brand as well as many competitive motors. Sintered and ball bearing versions are available in ratios from 9:1 to 5,752:1 with efficiencies of up to 81%. Such products are ideal for OA, instrumentation, pumps and monitoring devices, and precision modeling.

Micro Mo ELECTRONICS INC.

742 2nd Avenue South, St. Petersburg, Florida 33701 USA
Phone: 813/822-2529 / Telex: 807-982

CIRCLE NO 764

100% STD-AT COMPATIBLE

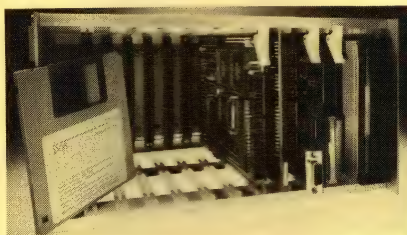

The STD-AT from WinSystems is the first 100% AT compatible computer system on the STD-Bus. The 80286 CPU will operate up to 20MHz and supports the Phoenix BIOS. Designed for industrial applications, it requires little space and provides compact, rugged packaging. A wide range of industrial I/O is offered including networking, disk storage, video graphics, A/D, D/A, digital I/O, serial I/O, and more.


WinSystems, Inc.

P.O. Box 121361
Arlington, TX 76012
(817) 274-7553

CIRCLE NO 765

Analog Circuit Simulation

IsSpice/286 Breaks the DOS Barrier



Run Unlimited
Size Simulations
on Your PC

IsSpice/286 \$210, a complete Spice program that runs on 80286 based PC's in extended memory. Circuit size is

only limited by the amount of extended memory. Simulates over 700 components per megabyte of RAM. IsSpice/386 \$386, The fastest PC based Spice program 1000 components per megabyte of extended RAM. IsSpice \$95, Runs on any PC. AC, DC, and Transient.

Special Graphics Turn Your PC Into a Workstation

SpiceNet \$295, Schematic editor for any Spice simulator. Generates a complete Spice netlist. IntuScope \$250, Graphics post processor that performs all the functions of a digital oscilloscope. PreSpice \$200, Extensive model libraries, Monte Carlo analysis and parameters sweeping.



P.O. Box 6607 (213) 833-0710
San Pedro, CA 30 Day Money
90734-6607 Back Guarantee

CIRCLE NO 766

To advertise in Product Mart, call Joanne Dorian, 212/463-6415

CDC/IMPRIMIS®

HIGH PERFORMANCE DRIVES

LAN KITS for PC's, Sun Work Stations & Dec Computers

106MB	5 1/4"	18ms	40,000MTBF	\$995
182MB	5 1/4"	16.5ms	40,000MTBF	\$1195
228MB	5 1/4"	18ms	40,000MTBF	\$1595
383MB	5 1/4"	14.5ms	40,000MTBF	\$2145
385MB	5 1/4"	10.7ms	40,000MTBF	Call
766MB	5 1/4"	14.5ms	40,000MTBF	\$3295
1.2GB	5 1/4"	16.5ms	40,000MTBF	Call
1.154GB	8"	16ms	50,000MTBF	Call
1.123GB	8"	16ms	50,000MTBF	Call

□ Complete LAN KITS, CD ROM NETS, WORM NETS, ERASABLE OPTICAL DRIVES. Custom configurations available.

□ High performance drives from Maxtor, Priam and other reputed manufacturers available.

□ Let us configure and custom package storage to your specifications. Call us today for a fast quotation.

□ We accept International orders.

EDI

(714) 530-8677
FAX: (714) 530-0815

CIRCLE NO 767

IBM COMPATIBLE RS232/488 3 1/2 x 5 1/4" FLOPPY DATA STORAGE & TRANSFER SYSTEM



Information Transfer to/from Non IBM Compatible Systems to/from IBM & Compatibles: (Over RS-232 or 488 Interface).

- Reads & Writes MS DOS Disks
- RS-232/488 I/O
- Rugged Portable Package/battery option
- MS DOS Driver for "Plug & Run" RS-232 External Operation
- Baud Rate 110 to 38.4K Baud
- 360K/720K RAM Cartridge Option
- Price \$895 in Singles-OEM Qty's. \$495.

28 other systems with storage from 100K to 42 megabytes.



ANALOG & DIGITAL PERIPHERALS, INC.
251 South Mulberry St., Troy, Ohio 45373
P.O. Box 499
513/339-2241 TWX 810/450-2685
FAX 513/339-0070

CIRCLE NO 770

Optimize Filter Response to Fit Your Design Target with COMTRAN®- PC

- Designs filters with custom-shaped responses
- Magnitude, Phase, Zin, Zout, or combinations
- Fits any precision response using available capacitor values (by recalculating resistors)
- Derives equivalent circuit from measured data
- Cuts opamp count in half (4 poles per opamp)
- FAST — Less than 1 second per point typical

Requires AT compatible w/HP 82300B BASIC Language Processor card w/1 MB RAM, & HP 9122 floppy drive. This card adds HP Rocky Mountain BASIC, w/ HP-IB interface, to your PC. Lets your PC run HP 200/300 BASIC software. COMTRAN previously ran only on HP computers.

COMTRAN® Integrated Software

A Division of Jensen Transformers, Inc.
10735 BURBANK BOULEVARD, N. HOLLYWOOD, CA 91601
FAX (818) 763-4574 • PHONE (213) 876-0059

CIRCLE NO 773


Z8 C COMPILER ASSEMBLER SOURCE DEBUGGER

* Call today for a FREE technical bulletin *

MICRO COMPUTER CONTROL
P.O. Box 275 — Hopewell, NJ 08525 USA
Telex 9102404881 MICRO UQ

FOR IMMEDIATE ACTION CALL:
(609) 466-1751

CIRCLE NO 768

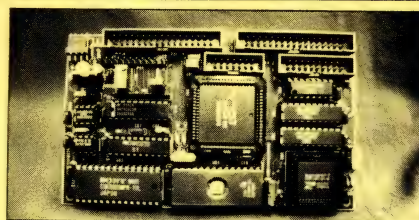

3" X 5" Single Board Computer Based on 80C535


- 8051 type architecture
- CMOS (95 ma @ 8 V typical)
- 32K RAM/32K or 64K EPROM
- 40 Digital I/O Lines
- Two RS232 Serial Ports
- One RS485 Port
- 8-bit A/D w/8 multiplexed inputs
- 5x4 Keypad Encoder
- Power Supervisory Circuits
- Four 16-bit timer/counters
- Expansion Bus
- On board +5 V regulation
- C Source Utilities on 5.25" Disk
- Optional Real Time Clock

GPC11 Price: \$275 qty 1 - OEM pricing available.

TRI-L DATA SYSTEMS, INC.
524 Cooke Street, 2nd Floor
Honolulu, Hawaii, USA 96813-5236
Tel. No. (808) 545-3415/FAX (808) 545-3807

CIRCLE NO 771

MAXIMIZE SYSTEMS PERFORMANCE WITH FLEXIBLE ZENDEX ZBX-MODULES



Connect cost/efficient and compatible ZBX I/O, SCSI and general purpose modules to your iSBX connectors.

For a FREE full-line catalog call 1-800-4MB-2DAY.
(In California call 1-415-828-3000)

ZENDEX

6700 Sierra Lane, Dublin, CA 94568

CIRCLE NO 774

E/EPROM & MICRO PROGRAMMER

\$895



- EP-1140 includes: software, cable, user's manual, 2 free software update coupons, toll-free technical support, one-year warranty & a unconditional 30-day money back guarantee
- Programs 24-, 28-, 32- & 40-pin E/EPROMs
- Supports 874X & 875X series microcontrollers
- Connects to a standard parallel port
- Hardware to support future parts to 8 Megabit
- Software updates on floppy disk
- 32-pin model, EP-1132, available for \$695

The Engineer's Programmer™


CALL TODAY 800-225-2102

BP MICROSYSTEMS

10681 Haddington, #190, Houston, TX 77043
713/461-9430 FAX 713/461-7413

CIRCLE NO 769

QUICK 'N STABLE

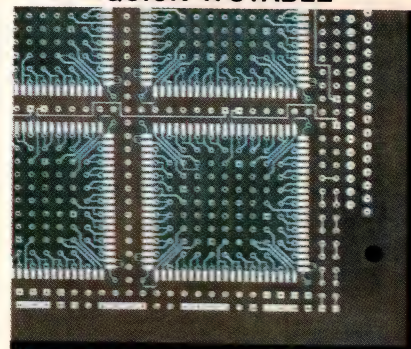

RO2800 (TM) PWB Laminates from Rogers. Low effective dielectric constant (2.8) improves electrical performances in high density, very high speed digital systems. Coefficient of thermal expansion, matched to copper improves plated thru-hole reliability and dimensional stability. **Rogers Corp.**, Rogers, CT 06263 203/774-9605

CIRCLE NO 772

2 parallel, 2 serial, 1 board

Qua Tech DSDP-402 for PC-AT has two parallel ports, and two serial ports for any combination of RS-232, 422, and 485 communication. All ports address selectable. Interrupts sharable and selectable.


For order info, call:
1-800-553-1170

QUA TECH

QUA TECH, INC.
478 E. Exchange Street
Akron, OH 44304

CIRCLE NO 775

To advertise in Product Mart, call Joanne Dorian, 212/463-6415

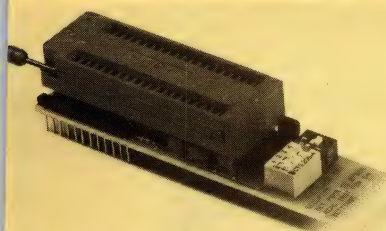

87C51 PROGRAMMER \$125.


Logical Systems brings you support for the Intel 87C51. The UP87C51 programs this popular microcontroller on general purpose programmers that support the 2732A. With the UP87C51 you can program the 8751 and 87C51 security bits and the 87C51 encryption array. Logical Systems, helping you get the most out of your programming equipment with our growing line of adapters. OEM inquiries welcome.

ADAPTER	PROGRAMS	PRICE
UPA8751	C8751, 8751H, AMD8753H, 8744	\$ 95.00
UPA87C51	C8751, 8751H, AMD8753H, 8744	125.00
	87C51, 87C51FA	
UPA63701V	Hitachi HD63701V0	65.00
UPA451N	Signetics SC87C451 (64 pin DIP)	125.00
UPA63701X	Hitachi HD63701X0 (64 pin shrink dip)	
	Low insertion force socket	95.00
	Textool ZIP socket	149.00
UPA63701Y	Hitachi HD63701Y0 (64 pin shrink dip)	
	Low insertion force socket	95.00
	Textool ZIP socket	149.00
UPA63705V	Hitachi HD63705V0	65.00

CALL (315) 478-0722 or FAX (315) 475-8460

LOGICAL SYSTEMS CORPORATION
P.O. Box 6184, Syracuse NY 13217-6184 USA, TLX 6715617 LOGS

CIRCLE NO 776

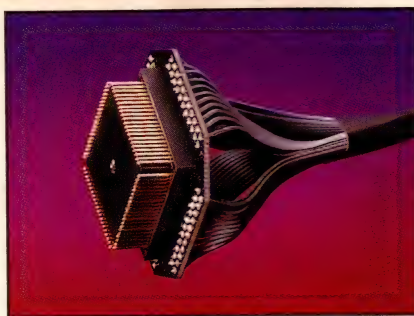

Easy Emulator Pods & Adapters

- Plug your PLCC and LCC packages into your PC board in minutes, with these easy-to-use adapters.
- Emulator/logic analyzer users: Adapt-a-Pod™ converts one package type to another (LCC, PLCC, PGA, and DIPs).
- Emulator pods and adapters are available in all standard pin counts, with ribbon or ribbon cable headers.
- Custom engineering services and do-it-yourself emulator pod converters. Free catalog.

Emulation Technology, Inc.
2368-B Walsh Ave. Santa Clara, CA 95051
Phone: 408-982-0660 FAX: 408-982-0664



CIRCLE NO 777



BUY A DATA I/O 29B PROGRAMMING SYSTEM FOR ONLY \$159* A MONTH!

If you are budget limited, but need 29B programming reliability, call today for information on Data I/O's leasing alternative through U.S. Instrument Rentals.

Call Data I/O at **1-800-247-5700**,
Ext. 531
or U.S.I.R. at **1-800-USIR-123**

*Based on a \$5,565 system price with a 4-year lease-to-own.

DATA I/O
Corporation

CIRCLE NO 778



smARTWORK® PCB Software. In a fraction of the time hand taping requires, you can create double-sided printed-circuit boards with smARTWORK and your IBM PC. The program's features include continual design-rule checking, automatic pad shaving, a silkscreen, and text for all three layers. **smARTWORK** with autorouting is \$895 (without, \$495) and comes with a 30-day money-back guarantee. Credit cards accepted. Write or call

Wintek Corporation
1801 South Street, Lafayette, IN 47904
(800) 742-6809 or (317) 742-8428

CIRCLE NO 779

ULTIBOARD COMPUTER AIDED PCB DESIGN


The ULTIMate PCB layout package featuring:

- Full SMT support
- 32 layer support with blind and buried vias
- Curved traces
- Real-Time Design Rule Check
- Powerful placement aids
- Trace Shove and Reroute-While-Move
- Autoroute by window, component, or net
- Backannotation to OrCAD, DASH, Schema, ViewLogic

ULTIMATE TECHNOLOGY USA/Canada: Norcross Ga, USA • tel: (404) 242-0125/ fax: 4382
Europe: Nantwich, Cheshire • tel: (+31) 2159-44424/ fax: 43345
ASK FOR YOUR FREE DEMO DISK

CIRCLE NO 780

WRITE OR CALL FOR SAMPLE
Low Cost Tempilabel™ Temperature Monitor.




How to put a low cost temperature gauge on everything.

Label's center spot turns black when surface to which it is affixed reaches specified temperature. Single- or multi-spot labels with pre-determined increment of ratings: 100°F (38°C) to 600°F (316°C). 1% accuracy guaranteed. 1 thru 8 ratings on each monitor with various increments. Self-adhesive, removable.

TEMPIL DIVISION, Big Three Industries, Inc.
2901 Hamilton Blvd., South Plainfield, NJ 07080
Phone: (201) 757-8300 Telex: 138662

CIRCLE NO 781



E(E)PROM, MEMORY CARD & MICRO PROGRAMMER \$345 - \$595

- All 24/28/32 pin EPROMs/EEPROMs to 4 Mbit (upgr. to 32MB).
- Flash EPROMs; Micros: 8741, -2, -8, -8H, -9, -9H, -51, -C51, -52, -55 ...
- Memory Cards: Seiko/Epson, Mitsubishi, GI. Modular design.
- Stand-alone E(E)Prom & Memory Card Duplication / Verify.
- User friendly menu - driven driver for IBM-PC & Macintosh.
- Built-in Eraser/Timer option (\$50). Gang-Module ready.
- Full 1 year warranty. Direct technical support. Dedicated BBS.

INTELLIGENT PROM EMULATOR \$395

- 2716 thru 27512 (2k to 64k bytes). Binary/Hex/Intel/Motorola.
- Intelligent features include: Reset Output, Address Compare, Address Snapshot, Trigger Input, Program Editing capabilities.
- FAST data loading via parallel port (64k bytes in less than 10sec).

MC/VISA/AMEX

Call today for datasheets!



B&C MICROSYSTEMS INC.
355 WEST OLIVE AVE. SUNNYVALE, CA 94086
TEL: (408) 730-5511 FAX: (408) 730-5521

CIRCLE NO 782

DC/DC CONVERTERS



Open Frame



Encapsulated

FEATURES

- 1 to 50 Watts
- Regulated Outputs
- Up to 1500VDC Isolation
- Input Pi Filter
- Industry Standard Pinouts



TOTAL POWER INTERNATIONAL, INC.
418 Bridge Street, Lowell, MA 01850 Telephone (508) 453-7272
FAX (508) 453-7390 TLX 948617


Send for Free Catalog

CIRCLE NO 783

Telecom Design!

CALL PROGRESS TONE

GENERATOR



M-991 generates precise dial tone, busy tone, reorder tone, ringing, and other call routing tones for use in telephone systems, test equipment, callback security and other telecommunications systems.

- 14-pin CMOS DIP
- Single 5V power supply
- 3.58 MHz time base
- Combinations of all standard frequencies

For more info call: **1-800-426-3926**
(In Washington State: 206-827-9626)

TELONE®

10801-120th Avenue NE, Kirkland, WA 98033

CIRCLE NO 784

To advertise in Product Mart, call Joanne Dorian, 212/463-6415




ESD-QR SERIES DATA LINE CLIP-ON FILTERS

Convenient hinged clamp construction provides high frequency filtering for existing signal or data lines. The high grade ferrite material is available with a variety of ID's to accommodate most common cable sizes. The ESD-QR series is effective over the frequency range from 10 to 1000 MHz to help reduce radiated noise emission. This product can be a life saver when your finished product fails to meet FCC regulations.

Tokin America,
155 Nicholson Lane, San Jose, CA 95134
408-432-8020

CIRCLE NO 785

CHIP COILS DC-DC CONVERTERS PULSE TRANSFORMERS




Our Chip Coils is good for your miniaturization & surface mounting. DC-DC Converters, pulse transformers & band pass filters is now complete with excellent functions. We also supply choke coils, power chokes, linearity coils, toroidal coils, pulse transformers, coupling transformers, power transformers and others. Send for details today!



OEM and Agent
Inquiries Invited

ABC TAIWAN ELECTRONICS CORP.
No. 422, Sec. 1, Yang Fu Rd., Yangmei 32627,
Taoyuan, Taiwan, R.O.C.
Tel: (03) 4788088, Telex: 32379 ABCEC
Fax: (03) 4755503

CIRCLE NO 788

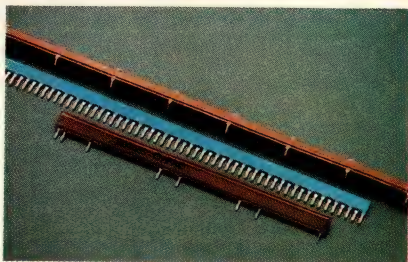

SAVE SPACE WITH Q/PAC® COMPONENTS

- Provide built-in capacitance
- Eliminate decoupling capacitance
- Gain 4-layer board quietness with 2-layer economy
- Vertical or horizontal mounting

**Send for Rogers Q/PAC®
Application Bulletin.**

Rogers Corp., 2400 S. Roosevelt St.
Tempe, AZ 85282 602/967-0624

CIRCLE NO 791

RELIABILITY PREDICTION SOFTWARE

ARE YOUR PRODUCTS RELIABLE?

The RelCalc 2 Software Package predicts the reliability of your system using the part stress procedure of MIL-HDBK-217E, and runs on the IBM PC and full compatibles. Say goodbye to tedious, time consuming, and error prone manual methods! RelCalc 2 is very easy to use, and features menu windows, library functions, global editing for what-if? trials, and clear report formats. Try our Demo Package for \$25.

T-CUBED SYSTEMS, 31220 La Baya Drive #110, Westlake Village, CA 91362. (818) 991-0057 • FAX: (818) 991-1281

CIRCLE NO 786

IPS CONVERTS 120VAC/60Hz TO INTERNATIONAL 220-240VAC/50Hz




The International Power Source converts standard North American 120VAC/60Hz power to international voltages and frequencies, typically 220-240VAC at 50Hz. Eight international sockets (German, Australian, British, Danish, Indian, Italian, Swiss and North American NEMA 5-15R) allow testing of products that will be exported with foreign power cords. Output voltages are adjustable from 0-250VAC and frequencies can be adjusted in the 47-500Hz range, allowing simulation of real-world power mains conditions.

Panel Components Corporation
P.O. Box 6626, Santa Rosa, CA 95406-0626
U.S. toll-free: (800) 662-2290
Canadian toll-free: (800) 346-4526 FAX: (707) 578-5478

CIRCLE NO 789

ANALOG CIRCUIT SIMULATION

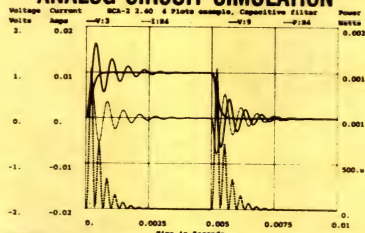


ECA-2: For design engineers who hate to waste their time and money, ECA-2 Electronic Circuit Analysis is a high performance, low cost, interactive analog circuit simulator. It reduces equipment expenses by eliminating the need for temperature chambers, signal generators, etc. Cuts weeks out of the design cycle time by simulating instead of prototyping. Available for a wide range of computers and operating systems.

- | | | |
|--|--|--|
| <ul style="list-style-type: none"> • AC, DC, Transient Fourier, Temperature • Worst-case, Monte Carlo • Sine, Pulse, PWL, SFM, and Exponential generators | <ul style="list-style-type: none"> • Built-in real time graphics • Multiple plots • Interactive or batch • Online help • Full nonlinear simulator | <ul style="list-style-type: none"> • Frequently updated • Over 500 nodes • Money back guarantee • SPICE compatible models • 2 to 50 times faster than SPICE |
|--|--|--|



CIRCLE NO 792

UNIVERSAL PROGRAMMER




For E(E)PROM, PAL, BIPOLAR
8748/51 Series PROGRAMMING
& IC/Memory TESTING
High-Speed, Parallel Interface
ONLY \$545 COMPLETE
Also Individual/Gang Units

XELTEK
473 Sapena Ct. Unit 24
Santa Clara, CA 95054
1-800-541-1975 (Toll Free Order)
Tel: (408) 727-6995, Fax: (408) 727-6996
COD, VISA, MC, AM EX Accepted

CIRCLE NO 787

WANT ATTENTION FROM OVER 139,000 ENGINEERING SPECIFIERS? EDN PRODUCT MART



16 MHz 80C186/C187 SINGLE BOARD COMPUTER

R.L.C. continues to offer the latest technology on the STD Bus. Our newest 16-bit Single Board Computer offers a CMOS 80C186 and new CMOS 80C187 Numeric Co-Processor. On-Board functions include MEMORY, SERIAL PORT, REAL TIME CLOCK, TIMERS, DMA, INTERRUPT CONTROLLER, RTC and RAM BATTERY BACKUP, WATCH-DOG TIMER and much more. Available in speeds up to 16 MHz. For more information and technical assistance please call Robert Coomer at

R.L.C. ENTERPRISES
4800 Templeton Road, Atascadero, CA 93422
(805) 466-9717

CIRCLE NO 793

To advertise in Product Mart, call Joanne Dorian, 212/463-6415

BUSINESS/CORPORATE STAFF

Peter D Coley
VP/Publisher
Newton, MA 02158
(617) 964-3030; Telex 940573
Ora Dunbar, Assistant/Sales Coordinator

Mark J Holdreith
Advertising Sales Director
Newton, MA 02158
(617) 964-3030
Heather McElkenny, Assistant

Deborah Virtue
Business Director
Newton, MA 02158
(617) 964-3030

NEW ENGLAND
Chris Platt, Regional Manager
Clint Baker, Regional Manager
199 Wells Ave
Newton, MA 02159
(617) 964-3730

STAMFORD 06904
George Isbell, Regional Manager
8 Stamford Forum, Box 10277
(203) 328-2580

NEW YORK, NY 10011
Daniel J Rowland, Regional Manager
249 West 17th St
(212) 463-6419

PHILADELPHIA AREA
Steve Farkas, Regional Manager
487 Devon Park Dr, Suite 206
Wayne, PA 19087
(215) 293-1212

CHICAGO AREA
Greg Anastos, Regional Manager
Jack Johnson, Regional Manager
Holli Gronseth, Telemarketing
Cahners Plaza
1350 E Touhy Ave, Box 5080
Des Plaines, IL 60017
(312) 635-8800

DENVER 80206
John Huff, Regional Manager
44 Cook St
(303) 388-4511

DALLAS 75243
Don Ward, Regional Manager
9330 LBJ Freeway, Suite 1060
(214) 644-3683

SAN JOSE 95128
Walt Patstone, Regional Manager
Bill Kianke, Regional Manager
Philip J Branon, Regional Manager
James W Graham, Regional Manager
3031 Tisch Way, Suite 100
(408) 243-8838

LOS ANGELES 90064
Charles J Stillman, Jr
Regional Manager
12233 W Olympic Blvd
(213) 826-5818

ORANGE COUNTY/SAN DIEGO 92715
Jim McErlean, Regional Manager
18818 Teller Ave, Suite 170
Irvine, CA
(714) 851-9422

PORTLAND, OREGON 97221
Pat Dakin, Regional Manager
Walt Patstone, Regional Manager
1750 SW Skyline Blvd, Box 6
(503) 297-3382

UNITED KINGDOM/BENELUX
Jan Dawson, Regional Manager
27 Paul St
London EC2A 4JU UK
01-628 7030
Telex: 914911; FAX: 01-628 5984

SCANDINAVIA
Stuart Smith
27 Paul St
London EC2A 4JU UK
01-628 7030
Telex: 914911; FAX: 01-628 5984

FRANCE/ITALY/SPAIN
Alasdair Melville
27 Paul St
London EC2A 4JU UK
01-628 7030
Telex: 914911; FAX: 01-628 5984

WEST GERMANY/SWITZERLAND/AUSTRIA
Wolfgang Richter
Sudring 53
7240 Horb/Neckar
West Germany
49-7451-7828; Telex: 765450

EASTERN BLOC
Uwe Kretzschmar
27 Paul St
London EC2A 4JU UK
01-628 7030
Telex: 914911; FAX: 01-628 5984

FAREAST
Ed Schrader, General Manager
18818 Teller Ave, Suite 170
Irvine, CA 92715
(714) 851-9422; Telex: 183653

HONG KONG
John Byrne & Associates Ltd
1613 Hutchison House
10 HGarcourt Road
Central Hong Kong
Tel: 5-265474
Tlx: 61708 WEDIN HX
Fax: 5-8106781

JAPAN
Kaoru Hara
Dynaco International Inc
Suite 1003, Sun-Palace Shinjuku
8-12-1 Nishishinjuku, Shinjuku-ku
Tokyo 160, Japan
Tel: (03) 366-8301
Telex: J2322609 DYNACO

KOREA
Kim Kyong-Hae, BK International
Won Chang Bldg, 3rd Floor 26-3
Yoido-dong, Youngdungpo-gu
Seoul 150, Korea
Tel: 785-6665; FAX: 784-1915
Telex: K32487 BIZKOR

**SINGAPORE/MALAYSIA/INDONESIA/THAILAND/
THE PHILIPPINES/AUSTRALIA/NEW ZEALAND**
Asia Pacific Media House PTE Ltd
Peter Cheong
100 Beach Rd
#24-03 Shaw Tower
Singapore 0718
Tel: 2915354; Telex: RS 50026 MESPLY

TAIWAN
Acteam International Marketing Corp
6F, No 43, Lane 13
Kwang Fu South Rd
Mailing Box 18-91
Taipei, Taiwan ROC
760-6209 or 760-6210
Telex: 29809; FAX: (02) 7604784

PRODUCT MART
Joanne Dorian, Manager
249 West 17th St
New York, NY 10011
(212) 463-6415

INFO CARDS
Donna Pono
Newton, MA 02158
(617) 558-4282

CAREER OPPORTUNITIES/CAREER NEWS
Roberta Renard, National Sales Manager
103 Eisenhower Parkway
Roseland, NJ 07068
(201) 228-8602

Janet O Penn, Eastern Sales Manager
103 Eisenhower Parkway
Roseland, NJ 07068
(201) 228-8610

Paula Compton, Western Sales Manager
18818 Teller Ave, Suite 170
Irvine, CA 92715
(714) 851-9422

Diane Philipbar, Sales Assistant
103 Eisenhower Parkway
Roseland, NJ 07068
(201) 228-8608

Wendy A Casella, Advertising/Contracts Coordinator
Nan E Coulter, Advertising/Contracts Coordinator
Aileen B Turner, Advertising/Contracts Coordinator
(617) 964-3030

William Platt, Senior Vice President, Reed Publishing USA
Cahners Magazine Division
Terry McDermott, President, Cahners Publishing Co
Frank Sibley, Senior Vice President/General Manager,
Boston Division
Tom Dellamaria, VP/Production & Manufacturing

Circulation
Denver, CO: (303) 388-4511
Eric Schmierer, Group Manager

Reprints of EDN articles are available on a custom
printing basis at reasonable prices in quantities of 500
or more. For an exact quote, contact Joanne R
Westphal, Cahners Reprint Service, Cahners Plaza,
1350 E Touhy Ave, Box 5080, Des Plaines, IL 60018.
Phone (312) 635-8800.

EDN's CHARTER

EDN is written for professionals in the worldwide electronics industry who design, or manage the design of, products ranging from circuits to systems.

EDN provides accurate, detailed, and useful information about new technologies, products, design techniques, and careers.

EDN covers new and developing technologies to inform its readers of practical design matters that will be of concern to them at once or in the near future.

EDN covers new products

- that are immediately or imminently available for purchase
- that have technical data specified in enough detail to permit practical application
- for which accurate price information is available.

EDN's Magazine Edition also provides specific "how to" design information that its readers can use immediately. From time to time, EDN's technical editors undertake special "hands on" engineering projects that demonstrate EDN's commitment to readers' needs for useful design information.

EDN's News Edition also provides comprehensive analysis and news of technology, products, careers, and distribution.

EDN

275 Washington St
Newton, MA 02158
(617) 964-3030

CAREER OPPORTUNITIES

1989 Editorial Calendar and Planning Guide

EDN

Editorial Emphasis

Issue Date	Recruitment Deadline	Editorial Emphasis	EDN News Edition
July 20	June 29	Product Showcase — Volume II, Components	Closing: July 21 Mailing: Aug. 10
Aug. 3	July 13	Integrated Circuits, Computer Boards	
Aug. 17	July 27	Military Electronics, Special Issue Military Software	Closing: Aug. 4 Mailing: Aug. 24
Sept. 1	Aug. 10	Test & Measurement, Integrated Circuits	Closing: Aug. 18 Mailing: Sept. 7
Sept. 14	Aug. 24	Industrial Product Showcase, Digital ICs	Closing: Aug. 30 Mailing: Sept. 21
Sept. 28	Sept. 7	Integrated Circuits, Computer Peripherals	Closing: Sept. 15 Mailing: Oct. 5

Call today for recruitment advertising information:

East Coast: Janet O. Penn (201) 228-8610

West Coast: Paula Compton (714) 851-9422

National: Roberta Renard (201) 228-8602

Software Engineer Needed

MATRIX Corporation designs and manufactures an advanced line of VMEbus systems. We are expanding our Research and Development efforts and have an immediate need for a Software Engineer having experience in the following areas:

- Network software design (OSI, TCP/IP)
- OS driver design (network, communications, graphics, peripherals)
- UNIX development and support (System V/BSD 4.X)
- HLL experience (C preferred)
- OS-9, VxWorks or other Real-Time experience will be considered a plus
- Sun Workstation experience preferred
- BSEE or BSCS and 3-5 years programming experience

This position requires self-motivation and an ability to work independently or as part of a project team. Resumes should be mailed to Michael Bryant, Vice President, 1203 New Hope Road Ext., Raleigh, NC, 27610, (919) 833-2000.



MATRIX Corporation is an AA/EOE

If you're looking
for work,
just look here.

EDN

Magazine
Edition
News
Edition

"Compaq has consistently led the industry with products that incorporate the latest technology."

—Business Week

Add your engineering expertise to the team the experts are talking about.

In an industry where one's success depends on the ability to produce breakthrough innovation, Compaq has excelled. Just ask the experts. They know our products represent some of the most advanced PCs in the world.

There's a story behind that success: the value of our products reflects the personal values of our people. Compaq engineers work together toward common goals. Their teamwork, creativity and commitment, fostered by a free and open environment, have made us one of the world's leading manufacturers of high-performance business PCs. As well as the talk of the industry.

Our continued success relies on our ability to introduce innovative new products to the market faster than anyone else. And that takes

outstanding talent. We have a variety of immediate opportunities for motivated engineering professionals at our Houston world headquarters. If you're a talented engineer with a desire to do what's never been done before, now's your chance.

OEM Sustaining Engineers

As a Compaq OEM Sustaining Engineer, you'll help support our manufacturing operations. You'll troubleshoot and resolve peripheral-related issues in conjunction with our Design and Quality Engineers. Experience with hard, floppy or tape drives, power supplies, keyboards or monitors is preferred.

PCB Sustaining Engineers

Your experience in a high-volume PCB manufacturing environment could put you on our winning team. You'll troubleshoot and develop PCB specifications for new and existing products. A thorough knowledge of surface mount technology and raw boards is essential.


In-Circuit Test Engineers

As a Compaq In-Circuit Test Engineer, you'll perform board-level in-circuit testing to ensure the highest product quality and performance. You'll work with GenRad 227X series ATEs and 229X series workstations. Along with your BSEE, you should have three years' related experience, including ATE programming.

Functional Test Engineers

Help support new product development in our dynamic design environment. You should be familiar with digital and analog fixture design, and knowledgeable in 'C' and Assembly languages programming. A background in memory board test and familiarity with 286/386-based PCs is preferred.

Talented individuals, the Compaq team creates some of the industry's most innovative PC products.

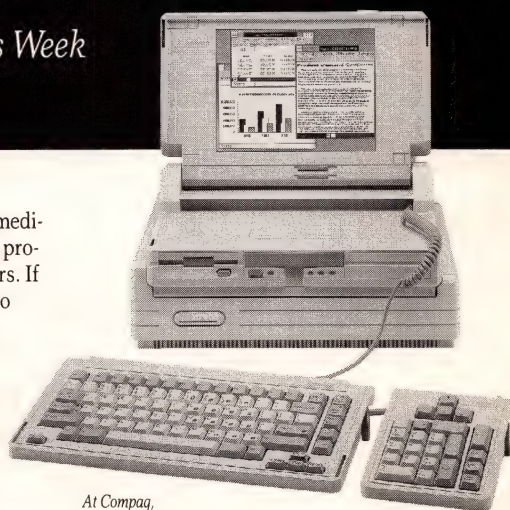

At Compaq, innovation begins with skillful insight—and results in successes such as the SLT/286.

Automation/Systems Engineers


Your BSEE or BSCS should be accompanied by five years' experience in PCB assembly factory automation. You'll need a strong background in hardware/software networking and expertise in PLCs and factory cell controller installation in UNIX or VMS environments. You should be familiar with 'C', PASCAL, BASIC, FORTRAN and CLIPPER programming languages and experienced in JIT, SPC, MRP, CAD, CAE, AI and GenRad test data collection systems. Experience in the design and development of systems specifications is essential. Familiarity with Novell, networks and D-BASE III is a plus. Strong communication skills are a must.

Be part of a remarkable team.

Now's your chance to see what all the talk is about. Compaq offers competitive salaries, comprehensive benefits and an environment that inspires creativity and personal satisfaction. If you're interested in one of these opportunities, please call us at 1-800-243-9003. Or simply submit your resume along with the position for which you wish to be considered to:

**Compaq Computer Corporation,
Dept. EDN7-BY, P.O. Box 692000,
Houston, Texas 77269-2000.**

© 1989 Compaq Computer Corporation. © 1989 Accent Software, Inc. All rights reserved. All products are registered trademarks or trademarks of their respective manufacturers. Compaq is an affirmative action employer, m/f/h/v.

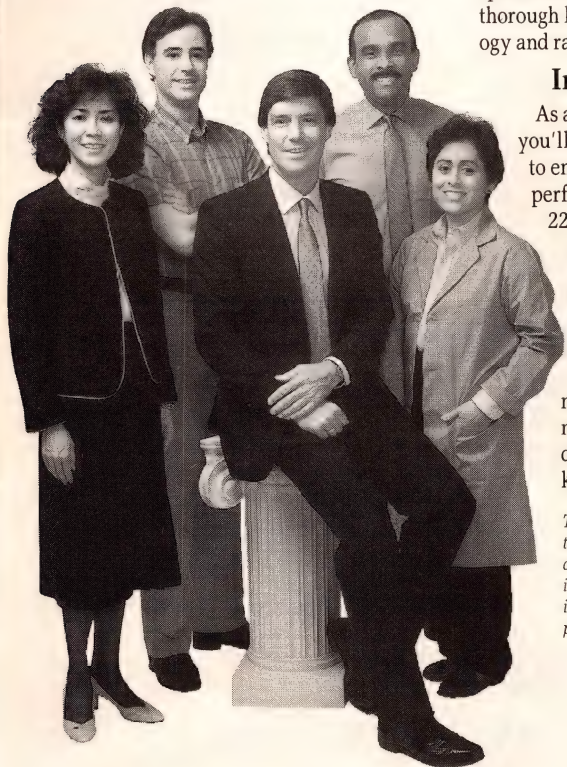

COMPAQ

EDN Databank

Professional Profile

Announcing a new placement service for professional engineers!

To help you advance your career, Placement Services, Ltd. has formed the EDN Databank. What is the Databank? It is a computerized system of matching qualified candidates with positions that meet the applicant's professional needs and desires. What are the advantages of this new service?

- It's absolutely free. There are no fees or charges.

- The computer never forgets. When your type of job comes up, it remembers you're qualified.
- Service is nationwide. You'll be considered for openings across the U.S. by PSL and its affiliated offices.
- Your identity is protected. Your resume is carefully screened to be sure it will not be sent to your company or parent organization.

- Your background and career objectives will periodically be reviewed with you by a PSL professional placement person.

We hope you're happy in your current position. At the same time, chances are there is an ideal job you'd prefer if you knew about it.

That's why it makes sense for you to register with the EDN Databank. To do so, just mail the completed form below, along with a copy of your resume, to: Placement Services, Ltd., Inc.

IDENTITY

Name _____ Parent Company _____
Home Address: _____ Your division or subsidiary: _____
City _____ State: _____ Zip: _____ Location (City, State) _____
Home Phone (include area code): _____ Business Phone if O.K. to use: _____

PRESENT OR MOST RECENT EMPLOYER

EDUCATION

Degrees (List)

Major Field	GPA	Year Degree Earned	College or University

POSITION DESIRED

EXPERIENCE

Present or Most Recent Position From: To: Title:

Duties and Accomplishments: _____
Industry of Current Employer: _____

Reason for Change: _____

PREVIOUS POSITION:

Job Title: _____
Employer: _____ From: _____ To: _____ City: _____ State: _____
Division: _____ Type of Industry: _____ Salary: _____
Duties and Accomplishments: _____

COMPENSATION/PERSONAL INFORMATION

Years Experience	Base Salary	Commission	Bonus	Total Compensation	Asking Compensation	Min. Compensation
Date Available	I Will Travel ☐ Light ☐ Moderate ☐ Heavy			☐ I own my home. How long? _____ ☐ I rent my home/apt. ☐		
☐ Employed ☐ Self-Employed ☐ Unemployed		☐ Married ☐ Single		Height _____ Weight _____		
Level of Security Clearance		☐ U.S. Citizen	☐ Non-U.S. Citizen	My identity may be released to: ☐ Any employer ☐ All but present employer		
☐ WILL RELOCATE ☐ WILL NOT RELOCATE ☐ OTHER _____						

EDN Databank

A DIVISION OF PLACEMENT SERVICES LTD., INC.

265 S. Main Street, Akron, OH 44308 216/762-0279

Extend Your Sphere Of Influence

For over 20 years, AMD has led the way in the design and manufacture of integrated circuits. Today, our "spheres of influence"—those areas where AMD will have a major impact on the marketplace—encompass proprietary products ahead of the technical curve.

We're developing the next-generation family of CMOS products; advancing the art of process technology through our membership in Sematech; building a state-of-the-art .35 submicron facility; and continuing our leadership in ISDN and FDDI—World Network™ technology, 32-bit RISC technology in embedded microprocessors and 1Mb EPROMs.

And now we're inviting you to increase your sphere of influence with a billion-dollar technology leader. Consider the exceptional opportunities awaiting your expertise.

OPPORTUNITIES IN AUSTIN, TEXAS

Low cost of living, no state income tax, great recreational and educational activities are just a few of the amenities available at AMD in Austin, Texas. And you'll be able to afford a beautiful home located just minutes away from our world-class CMOS fab and design center, one of America's fastest-growing high-tech centers.

PRODUCT OPENINGS IN TELECOMMUNICATIONS GROUP:

—ISDN
—SLIC/SLAC

ISDN IC Design Engineer
Analog H/W Applications Engineer
Software Communications
Protocol Applications Engineer
Telecommunications Product
Marketing Engineers
Product/Test Engineer


PRODUCT OPENINGS IN MICROPROCESSOR GROUP:

—32-BIT RISC MICROPROCESSOR
—AMD 29000 FAMILY

Sr. VLSI Logic Design Engineers
PC Product Planning Engineers
PC Hardware Design
CAD/VLSI Design Engineers
Product/Test Engineer
Technical Marketing
Engineer/Graphics
Technical Marketing Engineer—
Telecom/LAN
Technical Marketing Engineers
(16 Bit Controllers)
Technical Marketing Engineer
(Laser Printers)
Sr. Software Applications Engineer

MANUFACTURING OPENINGS:

SPC Director
Technical/Operations Training
Manager
Automation Engineers
(Manufacturing Technology)
CAM Systems Integration
Engineer
CAM Engineer (INGRES
Database, "C")
Software Applications Engineer
(CAM/EIS)
Defect Density/Yield
Enhancement Engineer
Device Engineers
Section Manager (thin films)
Process Engineer/Technicians
Equipment Engineers/Technicians
Product Engineering Section
Manager/Product Engineers
(CMOS-SRAMs, LOGIC)
Facilities Engineers/Technicians
Production Supervisor
Buyer

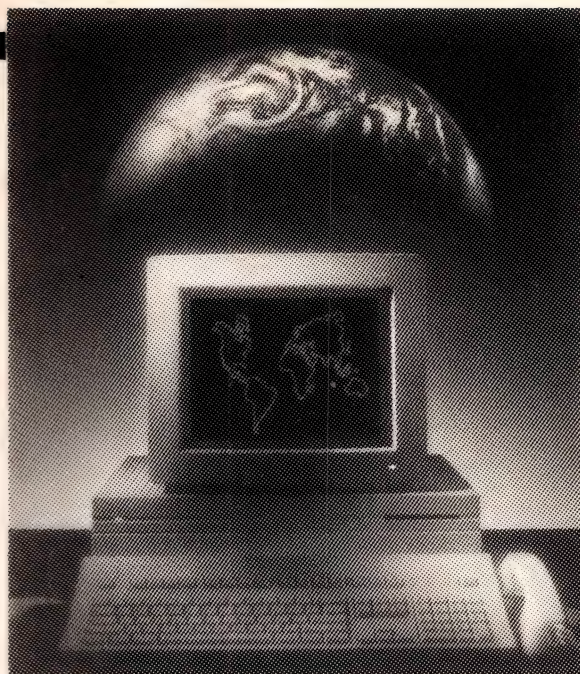

FOR MANUFACTURING OPENINGS SEMICONDUCTOR EXPERIENCE REQUIRED.

For the Texas positions, send your resume to: **Advanced Micro Devices, Department MS-556-EDN, 5204 East Ben White Blvd., Austin, Texas 78741.** You may also call toll free 1-(800) 531-5202, Ext. 5355, or FAX your resume to (512) 462-5108. For manufacturing line openings, ask for **Pamela May** or **Ed Moore**; for product line openings, ask for **Paul Maack** or **John O'Hara**.

OPPORTUNITIES IN SUNNYVALE/ SANTA CLARA

Join us in the heart of Silicon Valley where we began our success over 20 years ago...and where we're currently building our Submicron Development Center.

MIS

Project Leaders/Analysts
Data Base Analyst
Systems Programmers
Programmer Analyst
Data Communications Analyst
MIS Manager
EDI Specialist

ENGINEERING

Test	CAD
Product	Sales and
Quality and	Technical
reliability	Marketing
Process	Applications
Software	Design, CMOS
Fab Equipment	or Bi-polar

FACILITIES

Electrical Engineers
Mechanical Engineers
Semiconductor Equipment
Installation Engineers

TECHNICIANS

Process	Fab Equipment
Product	

For the California positions send your resume to: **Advanced Micro Devices, P.O. Box 3453, MS-935, Dept. EDN, Sunnyvale, CA 94088** or call toll free 1-(800) 538-8450, Ext. 88527. You may also FAX your resume to AMD at (408) 235-8636. We are an equal opportunity employer.



One Great Company

EDN's INTERNATIONAL ADVERTISERS INDEX

ABC-Taiwan Electronics Corp	258	Hitachi America Ltd*	112-113, 146-147	Seeq Technology Inc	40-41
ACCEL Technologies Inc	80	Holmberg Electronics	242-243	SGS-Thomson Microelectronics	38-39
ADPI	256	Huntsville Microsystems Inc	249	Siemens**	265
Advanced Micro Devices	12-13	ICI Imagedata	135	Siemens Components Inc*	125
Advanced Motion Control	252	IEE	34	Siemens Optoelectronics	235
Advin Systems	252	Illinois Capacitor	212	Signetics Corp	165, 167
Altera Corp	54-55	Imprimis Technology	110-111	Singular Tech	253
Amperex Electronic Corp*	206	Inmos Ltd	10-11	Songtech	255
AMP	128-129	Integrated Device Technology Inc	124	Sony Corp of America	61
Analog Devices Inc	197	Intel Corp	150-151, 152-153, 154-155	Sophia Systems Inc	91
Ango Electronics Corp	253	Intusoft	255	Spectrum Software	45
Antex Electronics	249	IOtech Inc	234	Sprague Electric Co	224
Apollo Computer	126-127	Ironwood	254	The Staver Co Inc	44
Applied Microsystems Corp	82-85	ITT ElectroMechanical Components Worldwide	18-19	STD Mfg Group	62
Asem Industria	146	Jameco Electronics	255	Sunrise Electronics Inc	255
AT&T Technologies	144-145, 236	Jantz Inc HBD	28	SUNX Sensors	99
Atlanta Signal Processors Inc	238	Jeta Power Systems	239	Tatum Labs	258
Atmel Inc	52	Kadach Products	253	T-Cubed Systems Inc	258
Augat	227	Keithley Instruments	56	TDK Corp of America	219
Avantek	225	Kepco Inc	217-218	TEAC Corp	14
B&C Microsystems	251, 257	Korry Electronics	221	Tektronix Inc	207-209
Belden Wire & Cable	C4	L-Com Inc	251	Teledyne Solid State	58
BP Microsystems	256	Leasametric Inc	141	Teltona Corp	257
Bradford Electronics	35	Ledtronics Inc	253	Tempil Div, Big Three	257
Braemar	246	Linear Technology Corp	180	Teradyne Inc	107-109
Brooktree Corp	122-123	Logic Devices	148	Texas Instruments Inc	137-140
Buckeye Stamping Co	253	Logical Advances	254	Themis Computer	79
Bud Industries Inc	245	Logical Devices Inc	251	Thomas Electronics Inc	239
Burr-Brown Corp	213, 220	Logical Systems Corp	257	Tokim America	258
BV Engineering	252	LSI Logic Corp	168-169	Toshiba America Inc	50-51
CAD Software Inc	254	3M Electronic Products	100	Toshiba Corp	250
Cadisy	252	3M Industrial Specialties	228	Total Power International Inc	257
Cahners CAPS	248-249	Marshall	121	Tri-L Data Systems Inc	256
Calcomp	130	Matsuo Electronics	105	Ultimate Technology	257
Capital Equipment Corp	253	Mental Automation	252	Universal Data Systems	C3
Carborundum	237	Mepco/Centralab	229	Vacuumschmelze	244
Cermetek	106	Microcomputer Control	256	Versatec	47-49
Chomerics Inc	204	Micro Mo Electronics Inc	255	Vesta Technology Inc	255
Classic Design Products Inc	251	MicroStar Labs	234	Vicor	230
Comtran® Integrated Software	256	Microtel Intl Inc	15	Vitellic Semiconductor	75
CRL Components Inc	232	Microtel Pacific Research Ltd	175	VME Microsystems	188
CRL Components Inc	25	Mini-Circuits Laboratories	3, 4, 26-27	Westcor	6
Cybernetic Micro Systems	60, 254	Mizar Inc	46	WinSystems Inc	255
Cypress Semiconductor	23	Molex Inc	266	Wintek Corp	254, 257
Daisy/Cadnetix	177-179	Motorola	63	Xeltek	258
Dale Electronics Inc	1	National Instruments	86	Xentek	231
Data I/O Corp	8, 257	National Semiconductor Corp	21	Zax Corp	142
Delevan	212	NEC Corp	42-43	Zendex	256
Densitron	36	Nec Electronics Inc	95-98	Ziatech Corp	120A-F
Design Computation Inc	252	NMB Technologies	81	Zilog Inc	77
Die-Tech Inc	249	Nohau Corp	251		
Digelec Inc	228	Oak Switch Systems Inc	216		
Directed Energy Inc	254	Octagon Systems	253		
Duracell	233	OKI Semiconductor	28-29		
Eaton Corp	253	Omation Inc	254		
EDI	256	Orbit Semiconductor	20		
EF Johnson Co	198	OrCAD Systems Corp**	189		
EG&G Vactec Inc	210	Orion Instruments	71		
Elantec	215	Panel Components Corp	258		
Elco	44	Philips Circuit Assemblies	201, 203		
Emulation Technology Inc	257	Philips Components**	17		
Epson America Inc	156, 176	Philips T&M**	125, 147		
Exar Corp	C2	Pittman	36		
FM Systems Inc	253	Potter & Brumfield	52-53		
Farnell International Ltd**	16	Precision Monolithics Inc	37		
Force Computers Inc	32-33	Pulse Instruments	94		
Foxboro Co	232	Qua Tech Inc	255, 256		
Franklin Software Inc	252	Radstone Technology	133		
Fujitsu Microelectronics Inc*	14-15	Ramco Electric Co	99		
Futaba Corp of America	92	Raytheon	73		
GE Plastics	183, 184, 185, 187	RLC Enterprises	258		
Grayhill Inc	143	RLM Research	254		
Harris Semiconductor	240-241	Robotrol	252		
Heurikon Corp	2	Rogers Corp	226, 252, 255, 258		
Hewlett-Packard Co	89, 101-104, 159, 170-171, 211	Samsung Semiconductor*	16-17		
		Schaeffert Engineering	214		

Recruitment Advertising 260

Advanced Mico Devices
Compaq Computer Corp
Matrix Corp

*Advertiser in US edition
**Advertiser in International edition

This index is provided as an additional service. The publisher does not assume any liability for errors or omissions.

SIEMENS

The new SAB82258A ADMA controller for 16-bit and 32-bit applications

Power plus intelligence for fast processor systems


The new SAB82258A Advanced DMA controller, a follow-on from the 32-bit systems of Siemens industrial standard ADMA family, offers an unequalled combination of transfer power and intelligent transfer control. Forward-looking applications like workstations, graphics systems, communication processors and SCSI modules can notch up a further step in performance enhancement with the SAB82258A. To be precise, transfer rates of 20 Mbyte/s for data I/O in 32-bit systems, and 10 Mbyte/s in 16-bit systems.

And that comes coupled with features like:

- Processor-independent stand-alone mode for greater system performance
- Four independently programmable and autonomous DMA channels
- Command and data chaining to ease the load on the CPU
- Search, compare and translation operations during transfer
- One channel optionally as a multiplexer channel for maximally 32 subchannels

Find out more about what the new SAB82258A ADMA coprocessor can do in your application.


Write Siemens AG, Infoservice HL-5816, Postfach 23 48, D-8510 Fürth quoting "ADMA".



TopTech Components:
Siemens

CIRCLE NO 159

A19100-HL 5816-X-7600

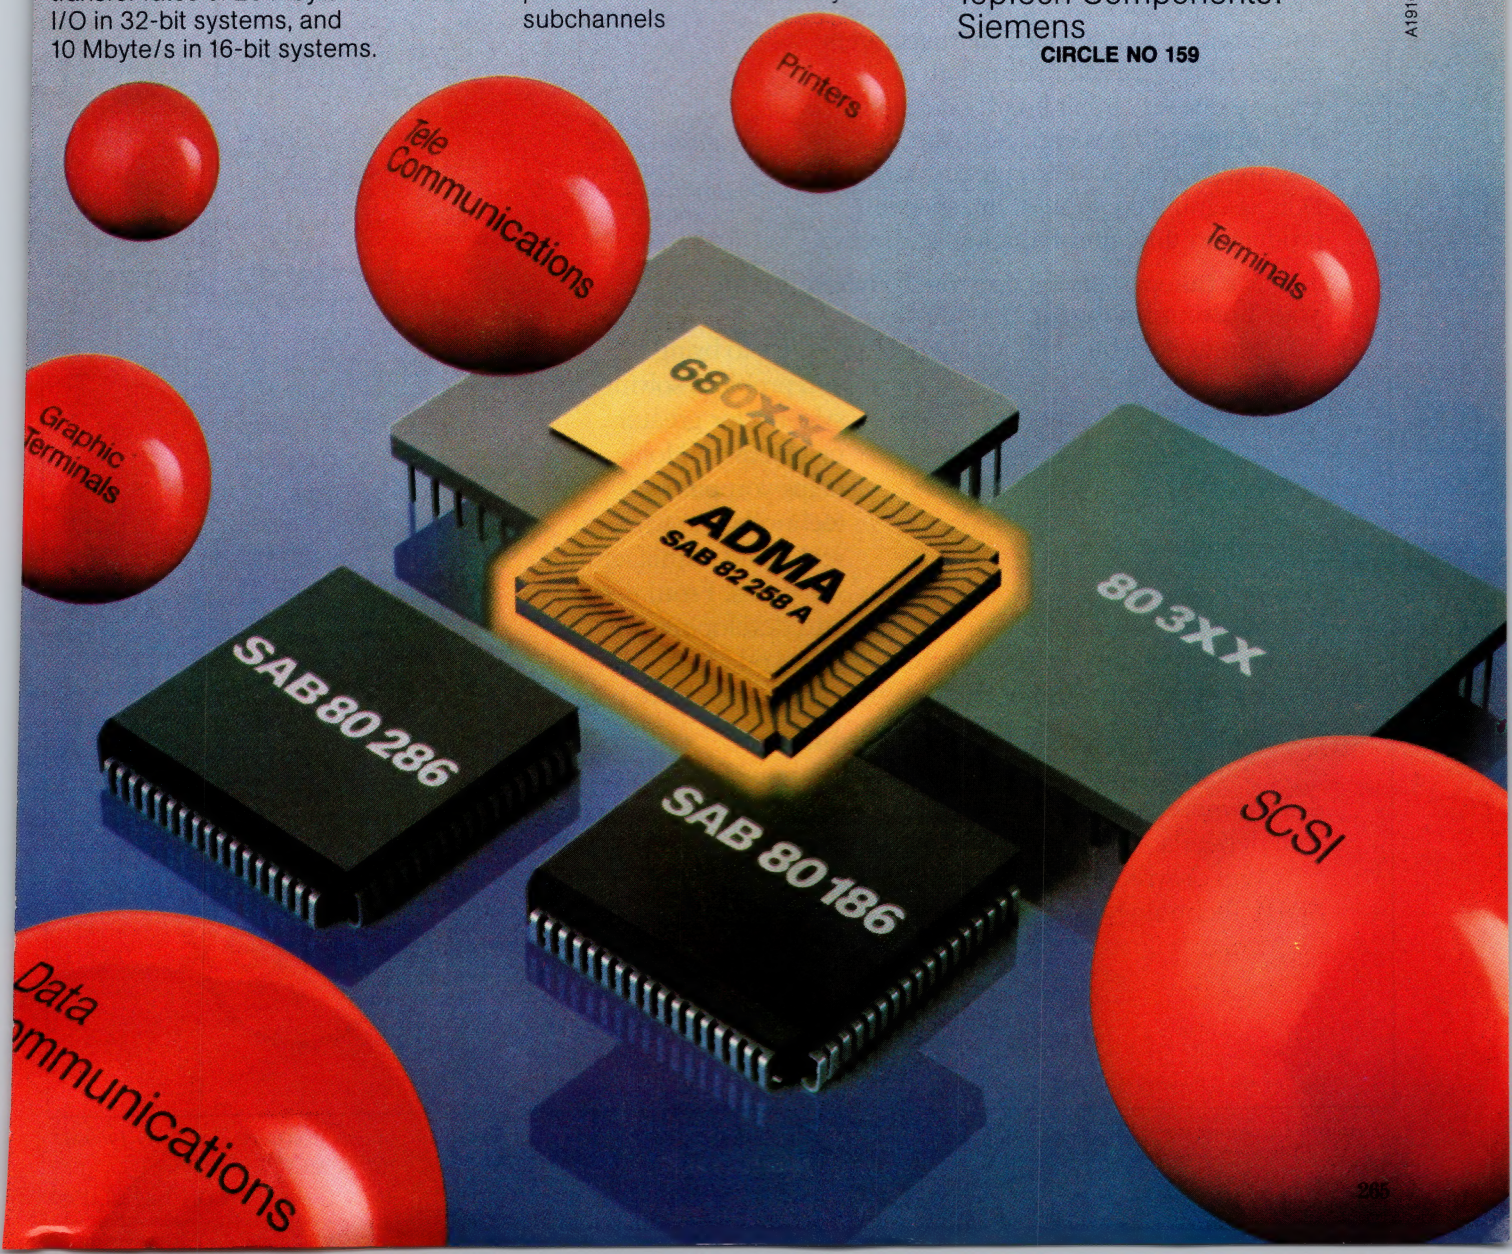

Making the Connection Between...


PACKAGING & PRODUCTIVITY

From through-hole technology to surface-mount technology, Molex makes the connection.

Molex is working to help today's manufacturers develop SMT products that utilize less space and assemble with greater efficiency. Components such as our SIMM sockets are currently helping major manufacturers utilize innovative SIP technology to achieve denser circuit board packaging and increased RAM capacity. And, systems such as our automated robotic PCB assembly equipment are speeding production time and reducing labor costs.

We take a systems approach to help make your bottom line more productive.

Molex goes beyond quality SMT products to bring

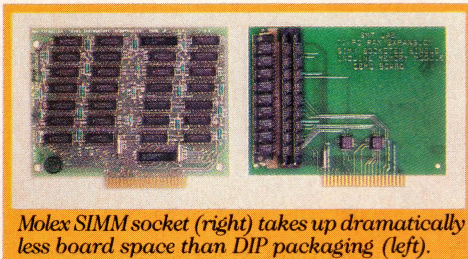

Molex SIMM socket (right) takes up dramatically less board space than DIP packaging (left).


you problem-solving systems for greater productivity. Molex helps you put new technology to work in real world manufacturing situations. From design and development to

manufacturing and delivery, you can depend on Molex for interconnection technology that gives you a competitive edge.


Connecting technologies worldwide.

Our multi-national organization offers you interconnection design, manufacturing, and technology from around the globe, with dependable supply and local service.

Call or write today for our new 16-page SIMM Technology Handbook.

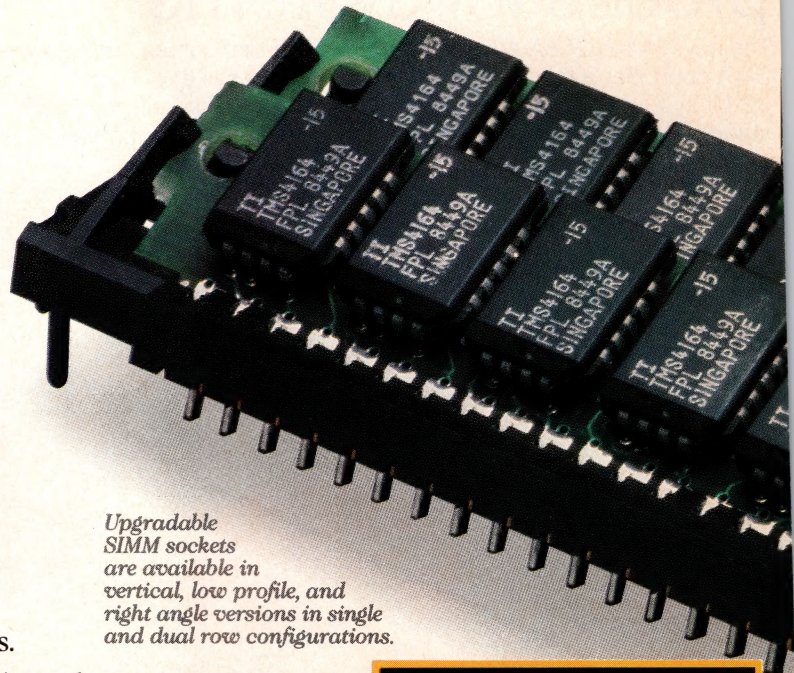

Upgradable SIMM sockets are available in vertical, low profile, and right angle versions in single and dual row configurations.

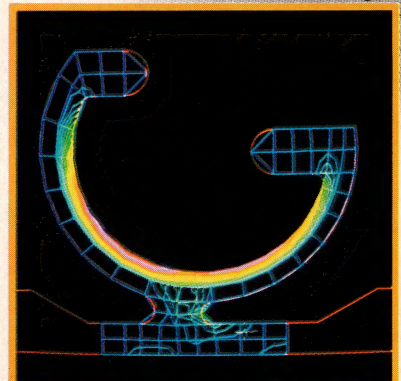


As part of our intensive quality assurance efforts, CAD technology is used in product development to identify possible stress points.

Service To The
Customer...Worldwide



SIMM™ is a registered trademark of the Wang Corporation.

Corporate Headquarters: 2222 Wellington Ct., Lisle, IL 60532 USA, (312) 969-4550 • European Headquarters: Munich, West Germany, 49-89-4960937
Northern Asia Headquarters: Tokyo, Japan, 03-487-8333 • Southeast Asia Headquarters: Jurong Town, Singapore, 65-265-4755

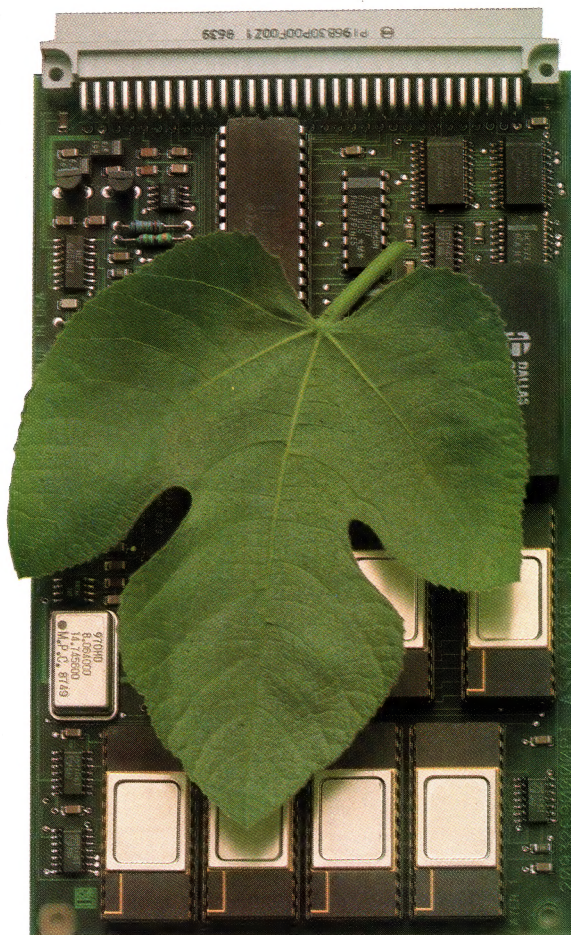

V.32

Stripped to the Bare Essentials

ONE EUROCARD is all it takes to accommodate the fully featured V.32 data pump from Universal Data Systems.

The device is a *true* V.32. It is fully compliant with the CCITT standard for 9600 bps, full-duplex data communications. It operates on dial-up, two-wire private or four-wire private circuits. It handles synchronous or asyn-

chronous data. It offers auto dialing through the AT command set, auto answer and adaptive line equalization. To preserve data integrity under degraded line conditions, it even has a trellis coded mode. An impressive set of diagnostics is also on board.

While the data pump is functionally identical to the industry standard UDS V.32 modem, it has

been stripped of its on-board power supply and DAA. These functions can be easily imported via the board edge connector.

For the bare facts about technical details and quantity pricing, contact Universal Data Systems, 5000 Bradford Drive, Huntsville, AL 35805. Telephone 205/721-8000; Telex 752602 UDS HTV.



Universal Data Systems



MOTOROLA INC.

BELDEN REDEFINES POWER CORD TECHNOLOGY



NEMA 1-15 with
Molded-In Field Replaceable Fuse, top

NEMA 5-15P
Add-A-Line Plug, top

IEC-320-C14
Shrouded Jumper, top

NEMA 5-15P
Plug, top

SPT Cooling
Fan Cord, bottom

Filtered Power
Supply Cord, bottom

IEC-320-C13
Connector, bottom

NEMA 5-15P
Hospital Grade Plug, bottom

European Cord with CEE 7
Std. Plug, bottom

II Innovation drives market applications, and those who supply today's manufacturers must themselves be committed to innovation. Belden's understanding of this can be seen in its industry standards — standards it continues to set today.

Belden offers one of the industry's broadest lines of power supply cords. Our standard product offering includes:

Belden innovation brings product designers a broad range of cost-effective cords

- OEM Power Supply Cords
- Special Purpose Power Supply Cords
- Extension Cords
- International Power Supply Cords
- Portable Cordage
- Receptacles

Available with a large variety of design options—including the industry's most advanced array of shielding options and jacketing materials—Belden® power supply cords are tailored to your specific application. In everything

from life support systems to personal computers, Belden cords are specified because of outstanding performance.

II For those who market their products worldwide, our international power cords make it easy to comply with international standards. Our Custom Design Center specializes in developing cords for new and unusual applications, and our OEM Sales Staff is prepared to serve all your needs. And, as always,

the quality of our standard domestic product is unsurpassed.

For more information on Belden power cords, call or write for the Belden Master Catalog. Your need for innovative options makes it an essential tool.

Belden Wire and Cable,
P.O. Box 1980
Richmond, IN
47375



1-800-BELDEN-4

There is no equal.®

